


O2D943



External illumination

BACKLIGHT 50X50 IR/0,3M/US

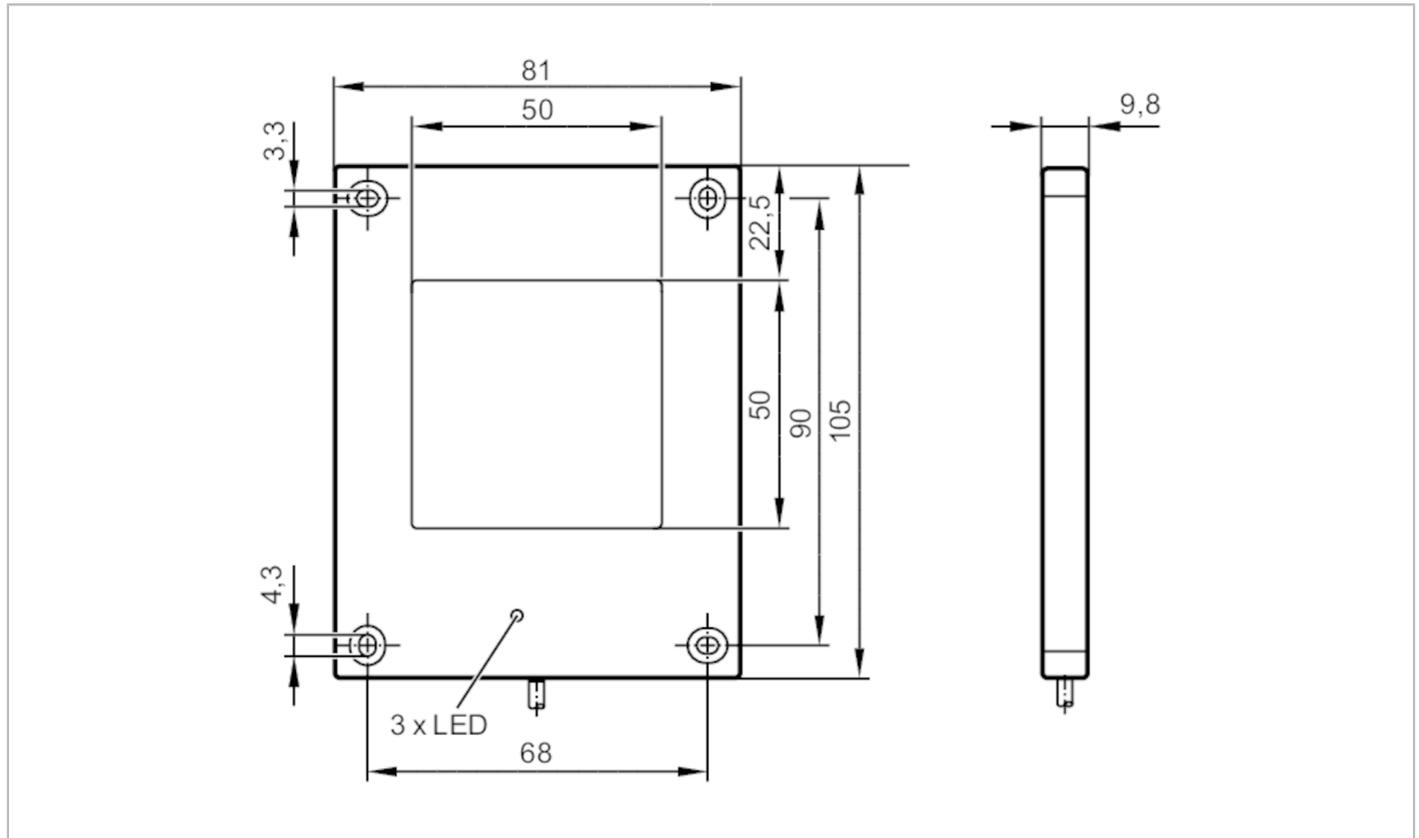

Product characteristics

Type of light	Infrared light
---------------	----------------

Application

System	gold-plated contacts
Illuminated field [mm]	50 x 50
Design	backlight
Type of operation	Permanent light or pulse operation

Electrical data

Operating voltage tolerance [%]	-10...10
Operating voltage [V]	24 DC
Current consumption [mA]	< 325
Protection class	III
Reverse polarity protection	yes
Type of light	Infrared light
Wave length [nm]	875

Inputs

Trigger	5...24 V
---------	----------

Operating conditions

Ambient temperature [°C]	-10...50
Protection	IP 54

O2D943



External illumination

BACKLIGHT 50X50 IR/0,3M/US

Overheat protection yes; (> 50 °C)

Tests / approvals

Photobiological safety exempt group; (EN 62471)

MTTF [years] 309

Mechanical data

Weight [g] 264.4

Dimensions [mm] 105 x 81 x 9.8

Material aluminum

Lens material glass

Displays / operating elements

Display Illumination status 1 x LED, yellow

Power 1 x LED, green

Excess temperature / overload 1 x LED, red

Remarks

Pack quantity 1 pcs.


Electrical connection

Cable: 0.30 m, PUR

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

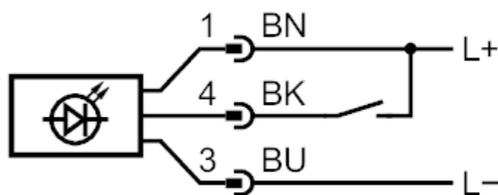

- 1 L +
- 3 L -
- 4 Trigger

Core colors :

- BK = black
- BN = brown
- BU = blue