


O2M200



Analog camera for mobile machines

O2MXOOKG/A1/GM/78

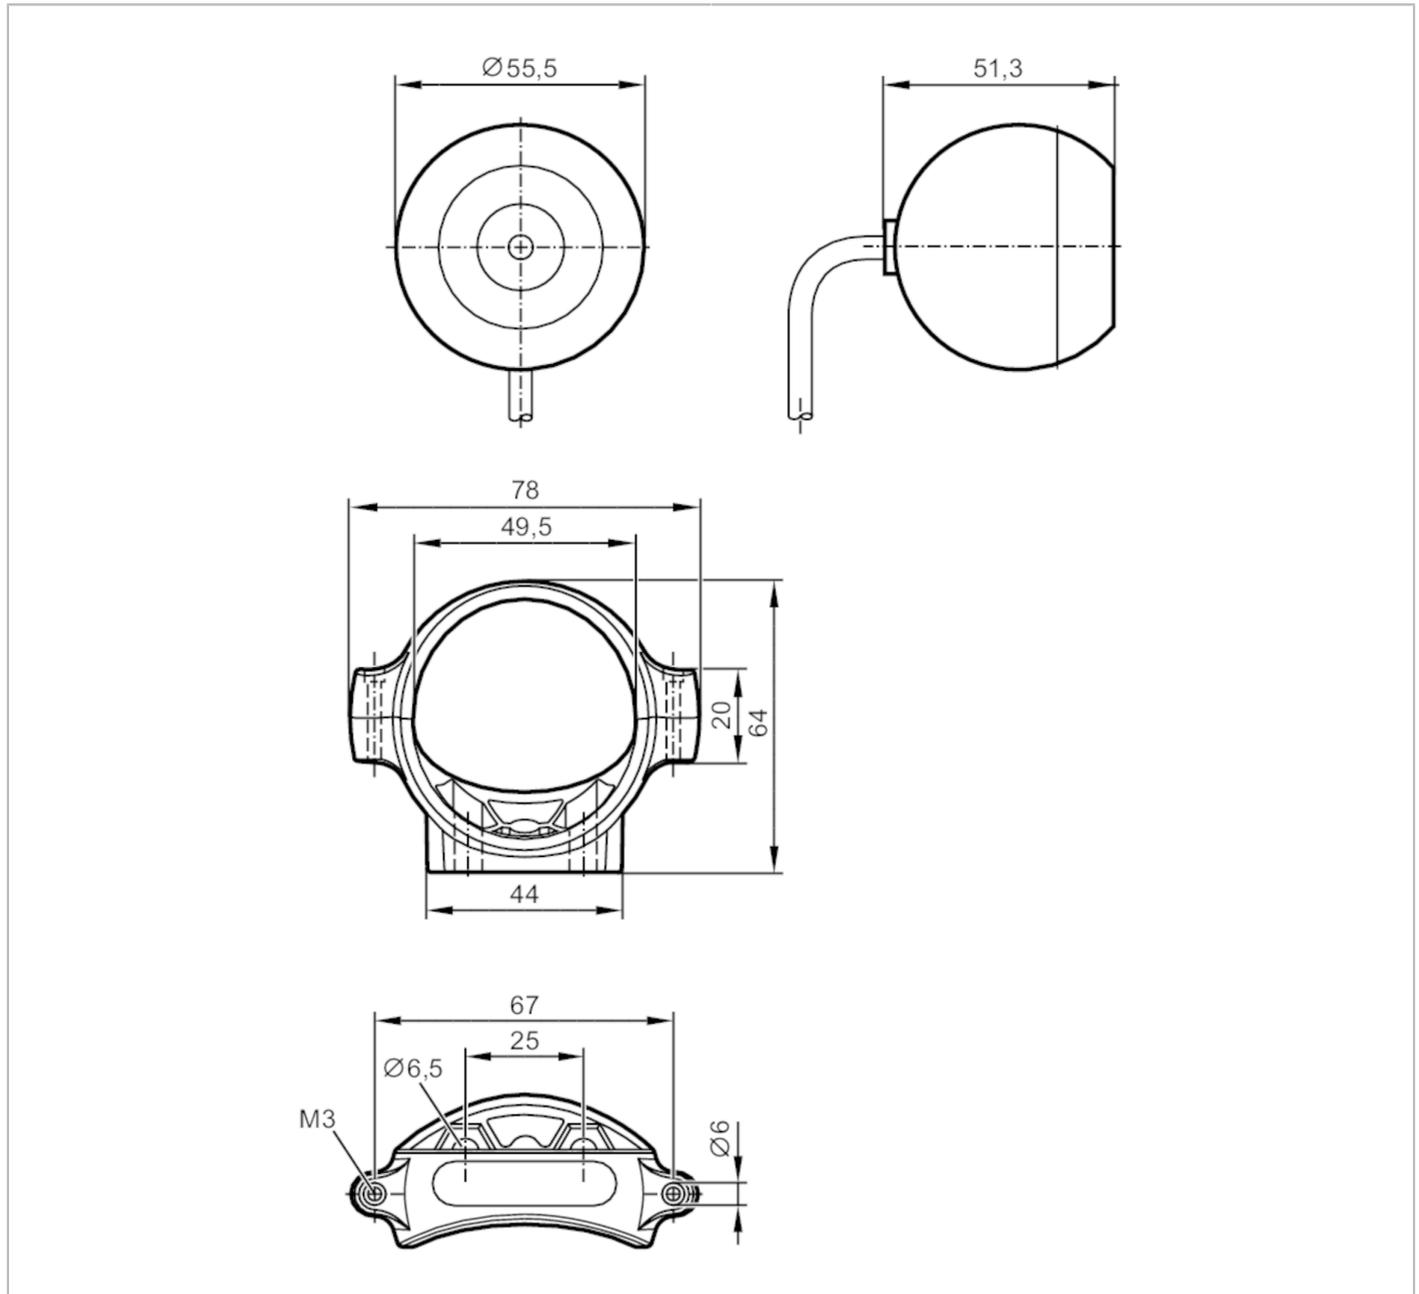

Product characteristics		
Image resolution	[px]	640 x 480
Angle of aperture	[°]	80 x 59
Application		
System		screened cable
Electrical data		
Operating voltage	[V]	12...32 DC
Current consumption	[mA]	< 280; (with lens heating)
Overtoltage protection		yes
Image sensor		¼" 4:3 VGA CMOS image sensor color

O2M200



Analog camera for mobile machines

O2MXOOKG/A1/GM/78

Switch-on peak current	[mA]	1000
Switch-on peak current duration	[ms]	2

Outputs	
Video output	PAL (25 fps interlace) 720H x 576V (640 x 480), 1 Vtt / 75 Ω

Monitoring range					
Field of view size	[mm]	Operating distance	Field of view		
		1000	1680 x 1130		
		2000	3360 x 2260		
		3000	5030 x 3390		
		4000	6710 x 4530		
		5000	8390 x 5660		
Image resolution	[px]	640 x 480			
Angle of aperture	[°]	80 x 59			
Light sensitivity	[LUX]	< 0.05			
Dynamic range	[dB]	> 80			

Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 69K

Tests / approvals		
EMC	DIN EN 61000-6-4	industrial environments
	DIN EN 61000-6-2	industrial environments
	UN-ECE R10	
Shock resistance		50 g
Vibration resistance	Frequency range 24...2000 Hz	(15.3 x 9.81 m/s ²)rms
	PSD (g ² /Hz)	0.04...0.1
Salt spray test	IEC 60068-5-52	

Mechanical data		
Weight	[g]	311
Dimensions	[mm]	Ø 55.5 / L = 51.3
Material		housing: PC/ABS; front lens: polyamide reinforced glass-fiber

Accessories	
Items supplied	Mounting set., E2M210
	screws: 2 x (M6 x 20 mm)
	washers: 2
	Nuts: 2 x M6, self-locking
	anti-slide pad

Remarks	
Pack quantity	1 pcs.

O2M200




Analog camera for mobile machines

O2MXOOKG/A1/GM/78

Electrical connection

Cable: 0.5 m, screened

Connector: 1 x M16; coding: A; Shielded connection cable: shield connected



1	coax cable core video signal
2	coax screen video GND
3	U+
4	0 V