


O6E403



Through-beam sensor receiver

O6E-FNKG/5M

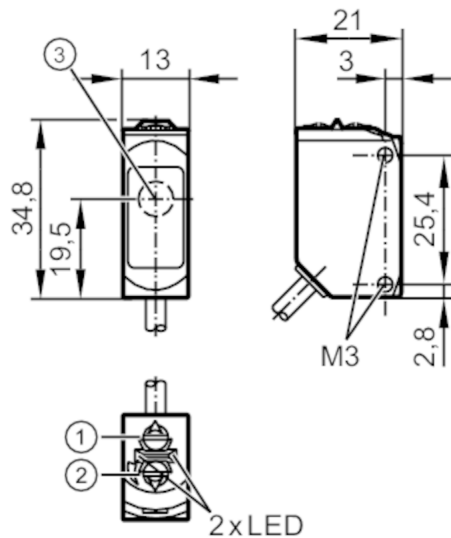

- 1: output function switch
- 2: potentiometer sensitivity
- 3: Light incidence



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		suited for use in the machine tool industry
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	7; ((24 V))
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	633
Outputs		
Electrical design		NPN
Output function		light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)

O6E403



Through-beam sensor receiver

O6E-FNKG/5M

Monitoring range		
Transmitter / receiver	receiver	
Range [m]	< 10	
Range adjustable	yes	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 65; IP 67; IP 68	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	954	
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	UL approval number	E018
Mechanical data		
Weight [g]	132.8	
Housing	rectangular	
Dimensions [mm]	34.8 x 13 x 21	
Material	housing: stainless steel (1.4404 / 316L); plastics: PPSU; sealing: FKM	
Lens material	PMMA	
Lens alignment	Side sensing	
Tightening torque [Nm]	1; (screws)	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Remarks		
Remarks	cULus - Class 2 source required	
Pack quantity	1 pcs.	

O6E403




Through-beam sensor receiver

O6E-FNKG/5M

Electrical connection

Cable: 5 m, PUR; 3 x 0.25 mm²


Connection

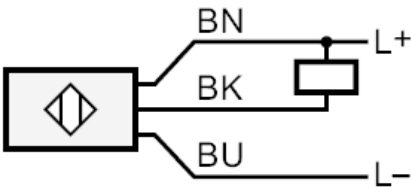

Core colors :
BN = brown
BK = black
BU = blue

Diagrams and graphs

excess gain graph

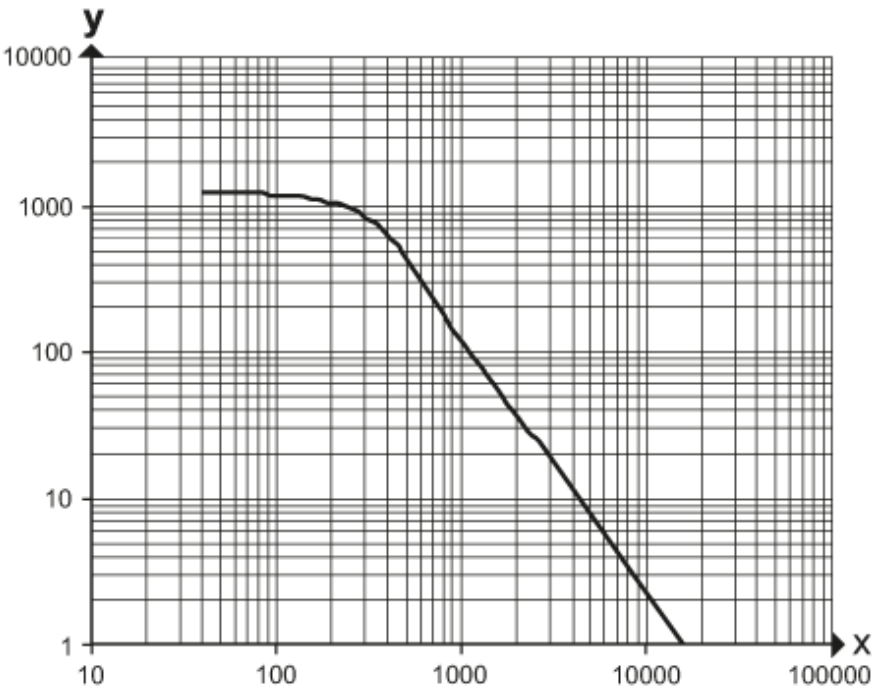

x: distance [mm]
y: excess gain factor