


OJ5000



Diffuse reflection sensor

OJB-FPKG/FO/AS

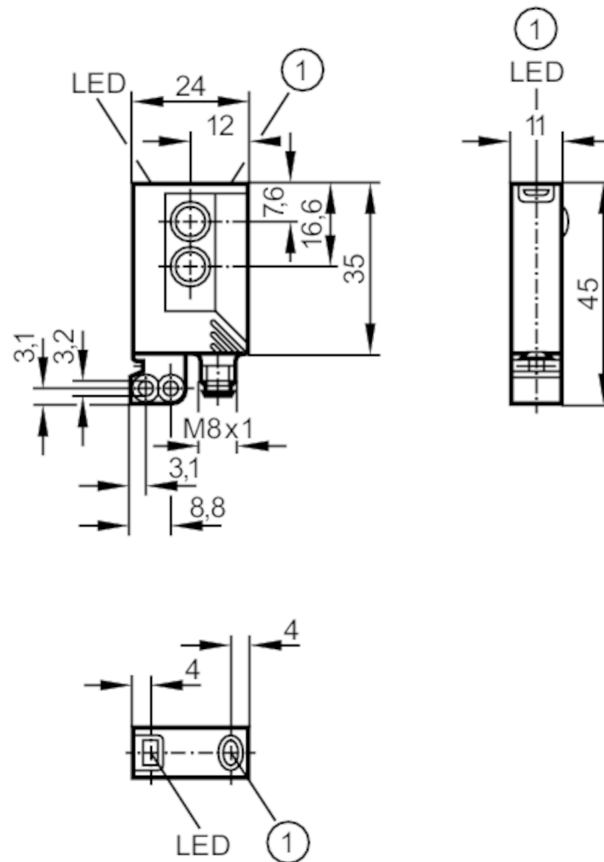

1 pushbutton



Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 22
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	660

Outputs

Electrical design	PNP
Output function	light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC [V]	2.5

OJ5000



Diffuse reflection sensor

OJB-FPKG/FO/AS

Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range	
Range [mm]	1...600; (white paper 200 x 200 mm 90 % remission)
Range adjustable	yes
Max. light spot diameter [mm]	60
Light spot dimensions refer to	at maximum range

Operating conditions	
Ambient temperature [°C]	-25...60
Protection	IP 67

Tests / approvals	
EMC	EN 60947-5-2
MTTF [years]	867

Mechanical data	
Weight [g]	38.9
Housing	rectangular
Dimensions [mm]	35 x 24 x 11
Material	housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material	glass
Lens alignment	Front sensing

Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red
Electronic lock	yes	

Accessories	
Items supplied	screws: 2 x (M3 x 16 mm)
	Basic clip: 1, E20964
	spring washers: 2
	Nuts: 2

Remarks	
Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

OJ5000



Diffuse reflection sensor


OJB-FPKG/FO/AS

Electrical connection

Connector: 1 x M8; coding: A



Connection

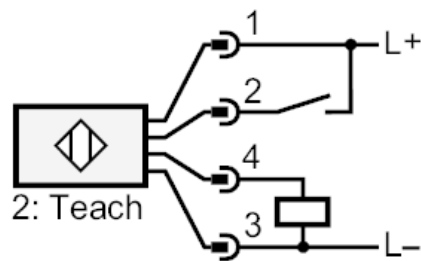

2

Teach

OJ5000



Diffuse reflection sensor

OJB-FPKG/FO/AS

Diagrams and graphs

excess gain graph

