




## Retro-reflective sensor for the detection of transparent objects

OJPGFPKG/FO/0,15M/US

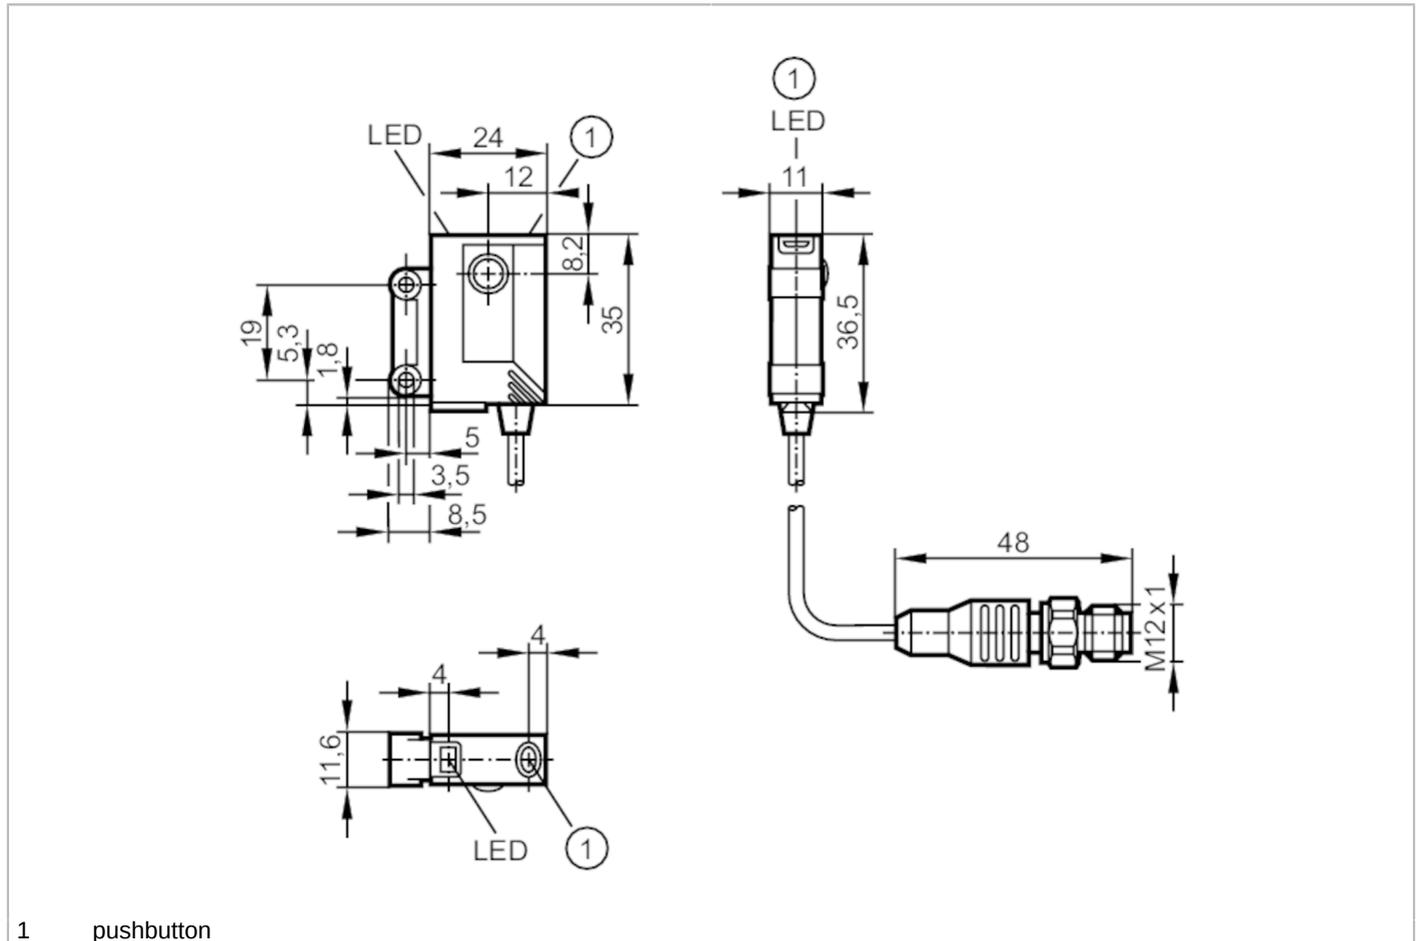

1 pushbutton



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
System		polarization filter
Function principle		Retro-reflective sensor
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 22
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5

# OJ5190



## Retro-reflective sensor for the detection of transparent objects

OJPGFPKG/FO/0,15M/US

Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

### Monitoring range

Range referred to prismatic reflector [m]	0.2...1.5; (Prismatic reflector 50 x 50 mm E20722)
Range adjustable	yes
Max. light spot diameter [mm]	64
Light spot dimensions refer to	at maximum range
Polarization filter available	yes

### Operating conditions

Ambient temperature [°C]	0...60
Protection	IP 67

### Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	867

### Mechanical data

Weight [g]	41.1
Housing	rectangular
Dimensions [mm]	35 x 24 x 11
Material	housing: ABS; LED window: SEPS; pushbutton: SEPS
Lens material	glass
Lens alignment	Front sensing

### Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red

### Accessories

Items supplied	screws: 2
	spring washers: 2
	Nuts: 2

### Remarks

Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

# OJ5190



## Retro-reflective sensor for the detection of transparent objects

OJPGFPKG/FO/0,15M/US

### Electrical connection

Cable: 0.15 m, PVC

Connector: 1 x M12; coding: A



### Connection

