


PG1743



Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

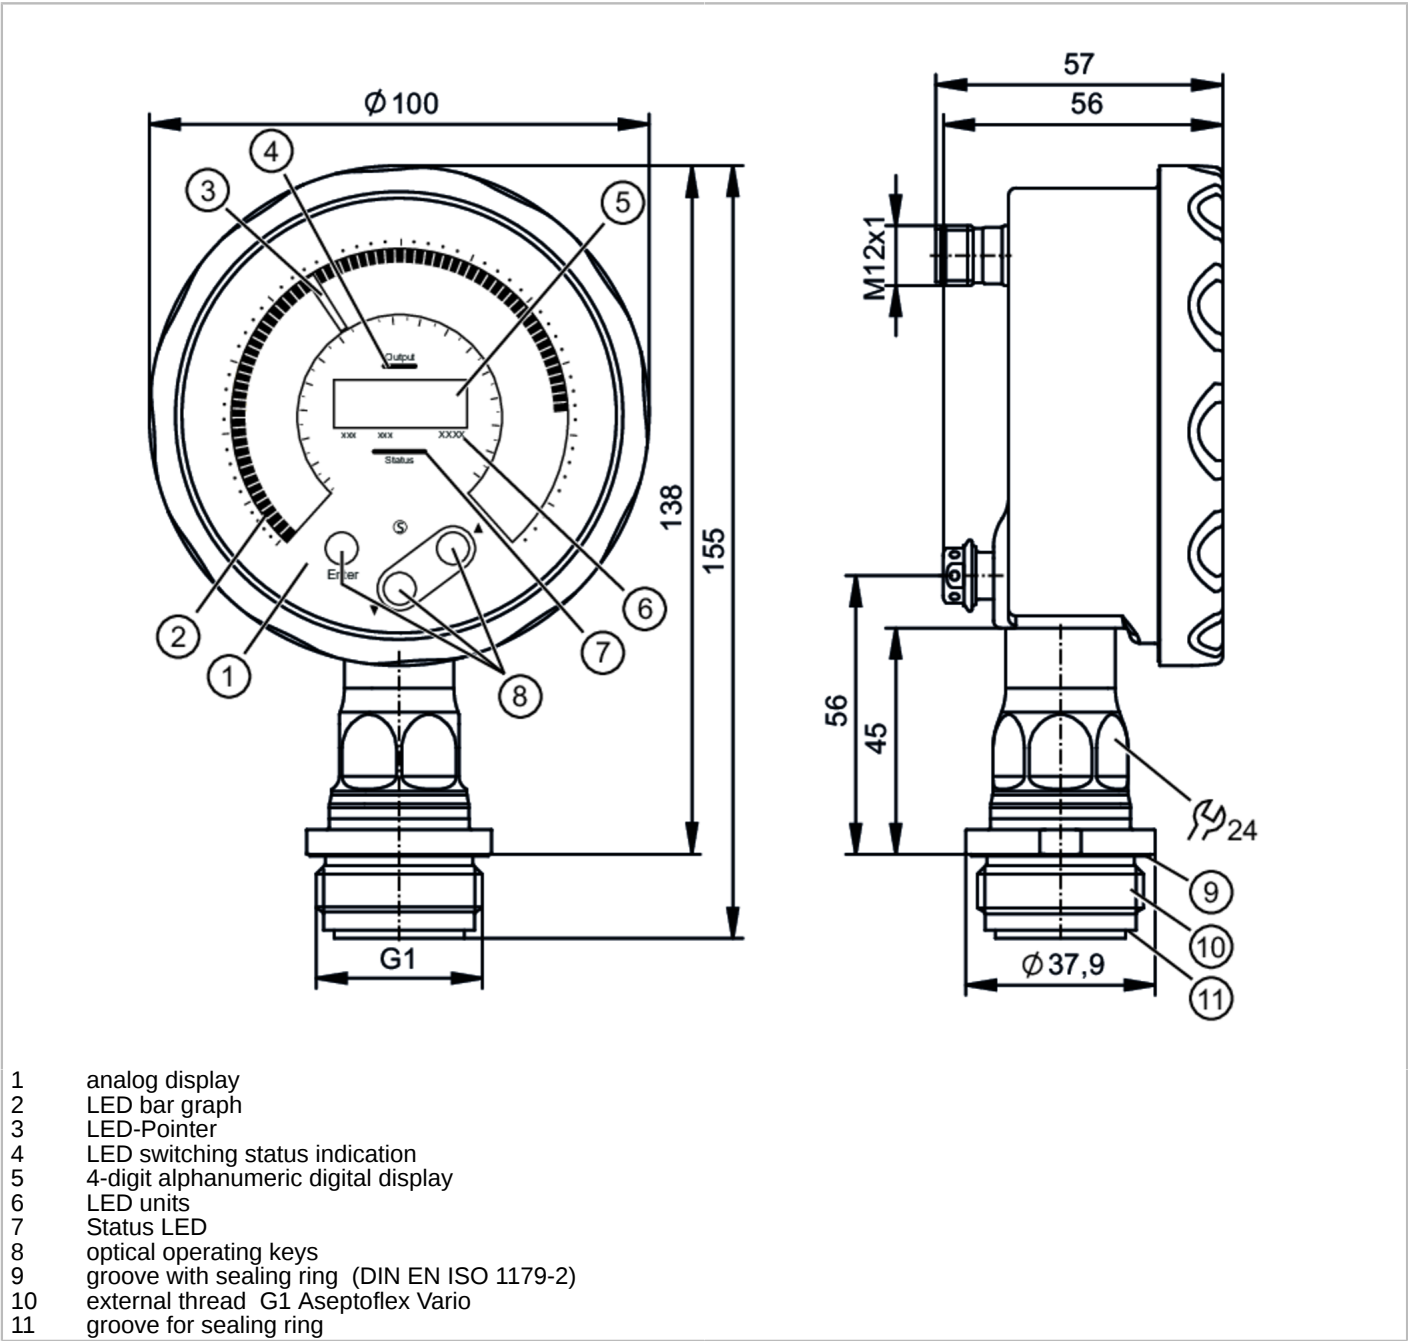

Product characteristics		
Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1	
Measuring range	-1...40 bar	-14.5...580 psi
Process connection	threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario	
Note	G1 Gewinde nach ISO 228. Alternativ dichtend über rückwärtige Dichtkontur mit Dichtung in Anlehnung an DIN EN ISO 1179-2.	
Application		
System	gold-plated contacts	
Measuring element	ceramic-capacitive pressure measuring cell	
Application	flush mountable for the food and beverage industry	



Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

Media	viscous media and liquids with suspended particles; liquids and gases	
Medium temperature [°C]	-25...150	
Min. burst pressure	400 bar	5801 psi
Pressure rating	125 bar	1813 psi
Vacuum resistance	-1000 mbar	14.5 psi
Type of pressure	relative pressure; vacuum	
No dead space	yes	

Electrical data

Operating voltage [V]	18...30 DC	
Current consumption [mA]	25...260	
Min. insulation resistance [MΩ]	100; (500 V DC)	
Protection class	III	
Reverse polarity protection	yes	
Power-on delay time [s]	< 0.5	
Integrated watchdog	yes	

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1	
------------------------------	---	--

Outputs

Total number of outputs	2	
Output signal	switching signal; analog signal; IO-Link	
Electrical design	PNP/NPN	
Number of digital outputs	1	
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2	
Permanent current rating of switching output DC [mA]	100	
Switching frequency DC [Hz]	125	
Number of analog outputs	1	
Analog current output [mA]	4...20, invertible; (scalable)	
Max. load [Ω]	500	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	

Measuring/setting range

Measuring range	-1...40 bar	-14.5...580 psi
Set point SP	-1...40 bar	-14.5...580 psi
Analog start point	-1...32 bar	-14.5...464 psi
Analog end point	7...40 bar	102...580 psi
In steps of	0.01 bar	1 psi

Measuring range (bar)

Factory setting	SP1 = 10 bar		
	SP2 = 9.2 bar		
	ASP = 0.00 bar		AEP = 40 bar
	dAP = 0.06 s		dAA = 0.06 s



Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

Measuring range (psi)			
Factory setting	SP1 = 145 psi		
	SP2 = 133 psi		
	ASP = 0.00 psi		AEP = 580 psi
	dAP = 0.06 s		dAA = 0.06 s
Temperature monitoring			
Measuring range	-25...150 °C		-13...302 °F
Resolution of display [K]	1		
Accuracy / deviations			
Switch point accuracy [% of the span]	< ± 0,2; (DIN EN IEC 62828-1; Turn down 1:1)		
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)		
Characteristics deviation [% of the span]	< ± 0,2; (DIN IEC EN 62828-1 incl. zero point and span error, non-linearity, hysteresis; Turn down 1:1)		
Linearity deviation [% of the span]	< ± 0,15; (Turn down 1:1)		
Zero-point stabilization [% of the span]	IO-Link, analog output	0,1; (see operating instructions zero-point behavior)	
	Display, Switching output	0,2	
Hysteresis deviation [% of the span]	< ± 0,15; (Turn down 1:1)		
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)		
Total deviation over temperature range	Temperature range	total deviation	
	-25...15 °C	Characteristics deviation ± 0,05 % of the span / 10 K	
	15...80 °C	Characteristics deviation	
	80...150 °C	Characteristics deviation ± 0,1 % of the span / 10 K	
Notes on the accuracy / deviation	for further details see section Diagrams and graphs		
Temperature monitoring			
Accuracy [K]	± 0.8 + (0.16 x (ambient temperature - medium temperature))		
Repeatability [K]	± 0,2		
Reaction times			
Min. response time of switching output (dAP) [ms]	3		
Damping process value dAP [s]	0...99.99		
Damping for the analog output dAA [s]	0...99.99		
Step response time analog output [ms]	7		
Temperature monitoring			
Dynamic response T05 / T09 [s]	< 55 / < 270; (DIN EN 60751 water ; > 0,9 m/s)		
Interfaces			
Communication interface	IO-Link		
Transmission type	COM3 (230,4 kBaud)		



Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

IO-Link revision	1.1												
SDCI standard	IEC 61131-9												
Profiles	Common - I&D												
	Identification and Diagnosis												
	Function												
	Measurement data, standard resolution												
SIO mode	yes												
Required master port class	A												
Min. process cycle time [ms]	1.3												
IO-Link resolution pressure [bar]	0.002												
IO-Link resolution temperature [K]	0.1												
IO-Link process data (cyclical)	<table> <tr> <th>Function</th><th>bit length</th></tr> <tr> <td>pressure</td><td>32</td></tr> <tr> <td>temperature</td><td>32</td></tr> <tr> <td>device status</td><td>4</td></tr> <tr> <td>binary switching information pressure</td><td>2</td></tr> <tr> <td>binary switching information temperature</td><td>2</td></tr> </table>	Function	bit length	pressure	32	temperature	32	device status	4	binary switching information pressure	2	binary switching information temperature	2
Function	bit length												
pressure	32												
temperature	32												
device status	4												
binary switching information pressure	2												
binary switching information temperature	2												
IO-Link functions (acyclical)	application specific tag; internal temperature; operating hours counter; switching cycles counter; Pressure peak counter; Temperature peak counter												
Supported DeviceIDs	<table> <tr> <th>Type of operation</th><th>DeviceID</th></tr> <tr> <td>default</td><td>1865</td></tr> </table>	Type of operation	DeviceID	default	1865								
Type of operation	DeviceID												
default	1865												
Operating conditions													
Ambient temperature [°C]	-25...70												
Storage temperature [°C]	-40...100												
Protection	IP 67; IP 69; (to DIN EN 60529)												
Tests / approvals													
EMC	DIN EN 61326-1												
Shock resistance	DIN EN 60068-2-27												
Vibration resistance	DIN EN 60068-2-6												
MTTF [years]	115												
Embedded software included	yes												
UL approval	<table> <tr> <td>UL approval number</td><td>J059</td></tr> <tr> <td>File number UL</td><td>E174189</td></tr> </table>	UL approval number	J059	File number UL	E174189								
UL approval number	J059												
File number UL	E174189												
Mechanical data													
Weight [g]	655.4												
Housing	manometer housing												
Dimensions [mm]	155 x 100 x 57												
Material	Housing: stainless steel (1.4404 / 316L); M12 connector: PPSU; sealing: FKM; pressure compensation element: PTFE; viewing glass: laminated safety glass 4 mm												
Materials (wetted parts)	measuring cell: ceramics (99.9 % Al ₂ O ₃); Process connection: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; sealing: PTFE												
Min. pressure cycles	100 million												
Tightening torque [Nm]	35												
Process connection	threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario												

PG1743



Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

Displays / operating elements		
Display	Pointer	LED, white ; 72 steps
	LED bar graph	multi-color ; 72 steps
	Measured values	alphanumeric display, white 4-digit
	Switching status	LED, yellow
	device status	LED, red/green
	Display unit	LED, white
	Display	display rotation: 320°
Display unit	bar; psi; °C; °F	
Operating elements	3	optical operating keys


Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

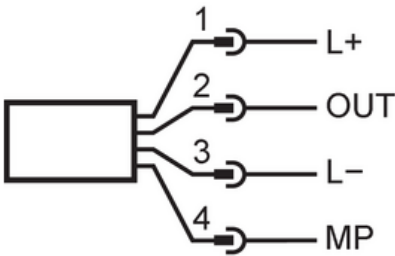

1	L+	
2	OUT	AO
3	L-	
4	MP	DO (NO/NC), IO-Link




Flush pressure sensor with display

PG-040-REA01-MFRKG/US/ /P

Diagrams and graphs

ambient temperature influence on
the accuracy

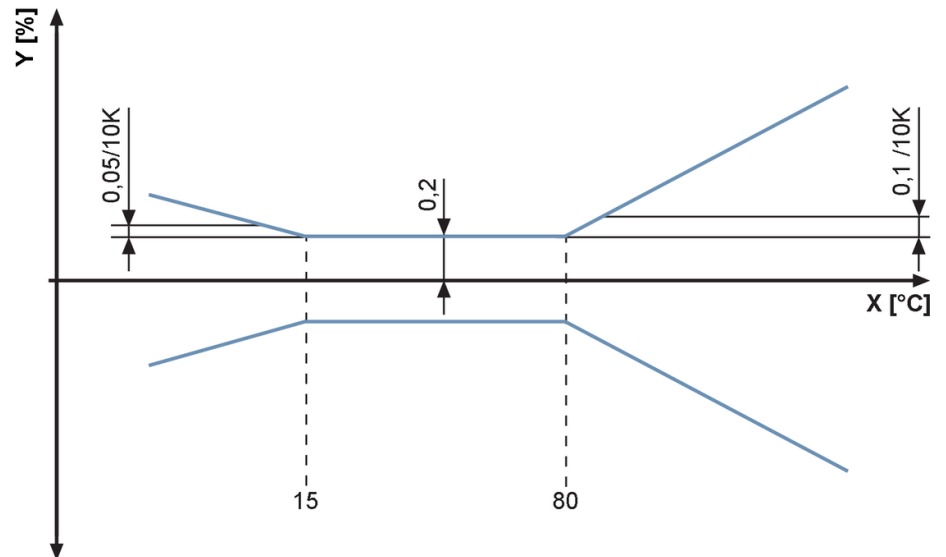

X temperature
Y total deviation