


PG2789



Flush pressure sensor with analog display

PG-,10BREA01-MFRKG/US/ /P

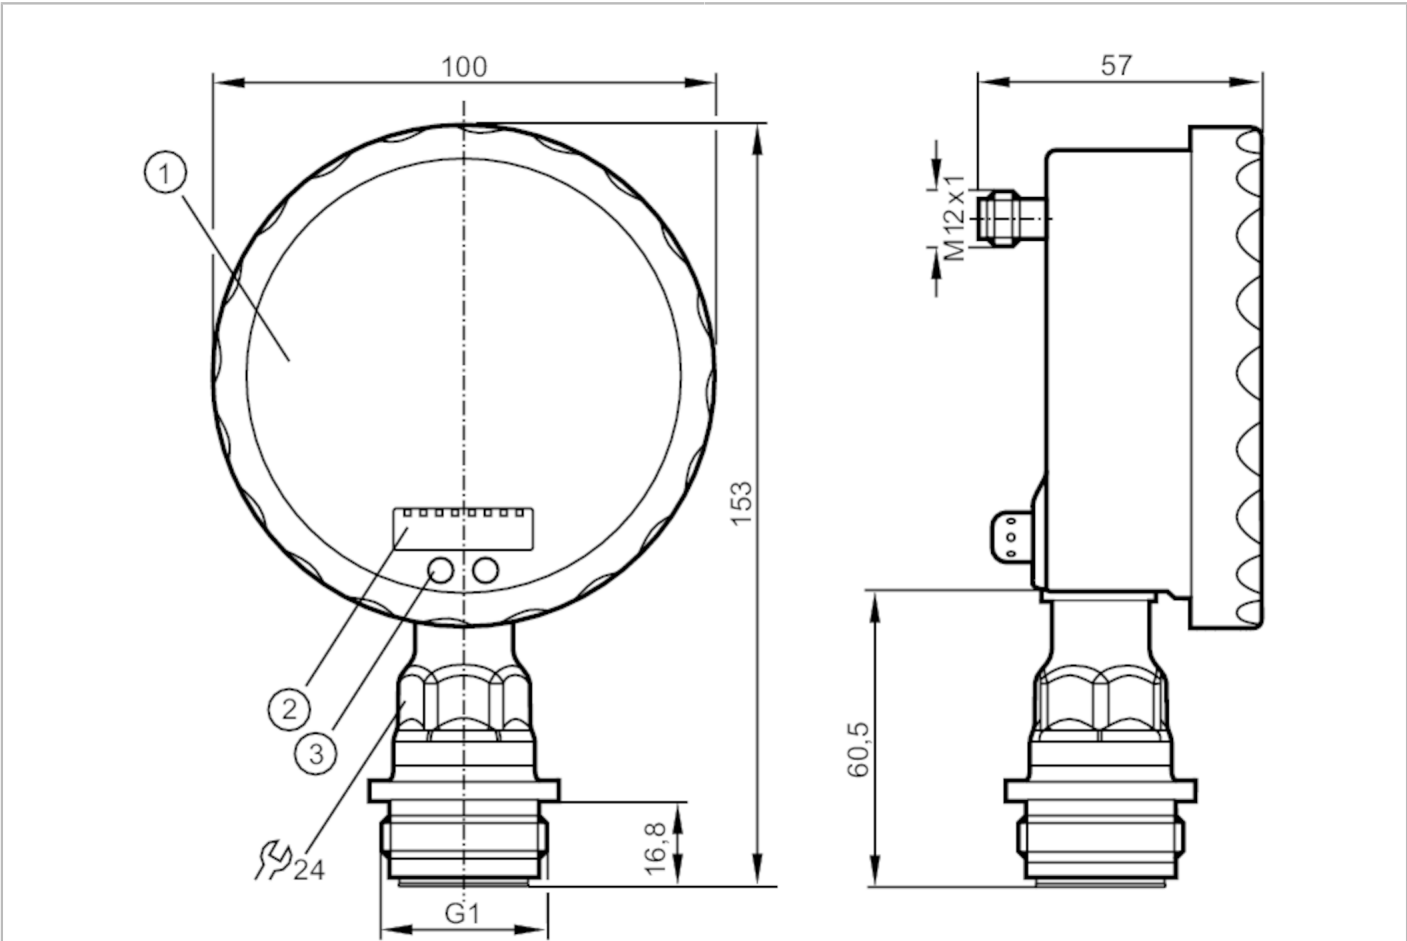

- 1 analog display
- 2 alphanumeric display 4-digit
- 3 Touch pad (programming button)



Product characteristics

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1		
Measuring range	-0.005...0.1 bar	-5...100 mbar	-2...40.15 inH2O
Process connection	threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario		
Note	G1 Gewinde nach ISO 228. Alternativ dichtend über rückwärtige Dichtkontur mit Dichtung in Anlehnung an DIN EN ISO 1179-2.		

Application

System	gold-plated contacts		
Application	flush mountable for the food and beverage industry		
Media	viscous media and liquids with suspended particles; liquids and gases		
Medium temperature [°C]	-25...125; (145 max. 1h)		
Min. burst pressure	30000 mbar	12043 inH2O	3 MPa
Pressure rating	4000 mbar	1605 inH2O	0.4 MPa
Type of pressure	relative pressure		
No dead space	yes		
MAWP (for applications according to CRN) [bar]	4		



Flush pressure sensor with analog display

PG-,10BREA01-MFRKG/US/ /P

Electrical data			
Operating voltage	[V]	18...32 DC	
Current consumption	[mA]	< 70; (24 V)	
Min. insulation resistance	[MΩ]	100; (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	6	
Integrated watchdog		yes	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 1; Number of analog outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		switching signal; analog signal; (configurable)	
Electrical design		PNP/NPN	
Number of digital outputs		1	
Output function		normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]	2	
Permanent current rating of switching output DC	[mA]	250	
Switching frequency DC	[Hz]	50	
Number of analog outputs		1	
Analog current output	[mA]	4...20, invertible; (scalable)	
Max. load	[Ω]	(Ub - 10 V) / 20 mA	
Short-circuit protection		yes	
Type of short-circuit protection		yes (non-latching)	
Overload protection		yes	
Measuring/setting range			
Measuring range		-0.005...0.1 bar	-5...100 mbar -2...40.15 inH2O
Set point SP		-4.8...160 mbar	-1.95...64.25 inH2O
Reset point rP		-5...159.8 mbar	-2.05...64.15 inH2O
Analog start point		-5...135 mbar	-2...54.2 inH2O
Analog end point		20...160 mbar	8.05...64.25 inH2O
In steps of		0.1 mbar	0.05 inH2O
Accuracy / deviations			
Switch point accuracy		< ± 0,5; (Turn down 1:1)	
	[% of the span]		
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation		< ± 0,5; (Turn down 1:1 , linearity, incl. hysteresis and repeatability , limit value setting to DIN EN IEC 62828-1)	
	[% of the span]		
Linearity deviation		< ± 0,25; (Turn down 1:1)	
	[% of the span]		
Hysteresis deviation		< ± 0,2; (Turn down 1:1)	
	[% of the span]		
Long-term stability		< ± 0.1; (Turn down 1:1; per year)	



Flush pressure sensor with analog display

PG-,10BREA01-MFRKG/US/ /P

[% of the span]		
Temperature coefficient zero point		< ± 0,1; (0...70 °C)
[% of the span / 10 K]		
Temperature coefficient span		< ± 0,2; (0...70 °C)
[% of the span / 10 K]		
Reaction times		
Response time	[ms]	< 10
Damping process value dAP	[s]	0.01...30
Damping for the analog output dAA	[s]	0.01...30
Step response time analog output	[ms]	25
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 69K
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF	[years]	100
Note on approval	Factory certificate available as download at www.factory-certificate.ifm	
UL approval	File number UL	E174189
Mechanical data		
Weight	[g]	520
Dimensions	[mm]	153 x 100 x 57
Material	stainless steel (1.4404 / 316L); PA; FKM; PTFE; viewing glass: laminated safety glass 4 mm	
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; ceramics (99.9 % Al2O3); PTFE	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario	
Displays / operating elements		
Display	Display unit	2 x LED, green
	Switching status	LED, yellow
	Switch points	LED ring, red
	Function display	alphanumeric display, red 4-digit
	Measured values	analog display, 0...350° rotatable, pointer not visible when unit disconnected
	Measured values	alphanumeric display, red 4-digit
With scale	yes	
Extended display range (max.)	160 mbar	64.25 inH2O

PG2789



Flush pressure sensor with analog display

PG-,10BREA01-MFRKG/US/ /P

Remarks	
Remarks	characteristics deviation in the extended display range:1.5 % of the span switch point accuracy in the extended display range: 1.5 % of the span
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection



OUT1 Switching output
OUT2 analog output