


# PM1714



## Flush pressure sensor

PM-016-REA01-E-ZVG/US

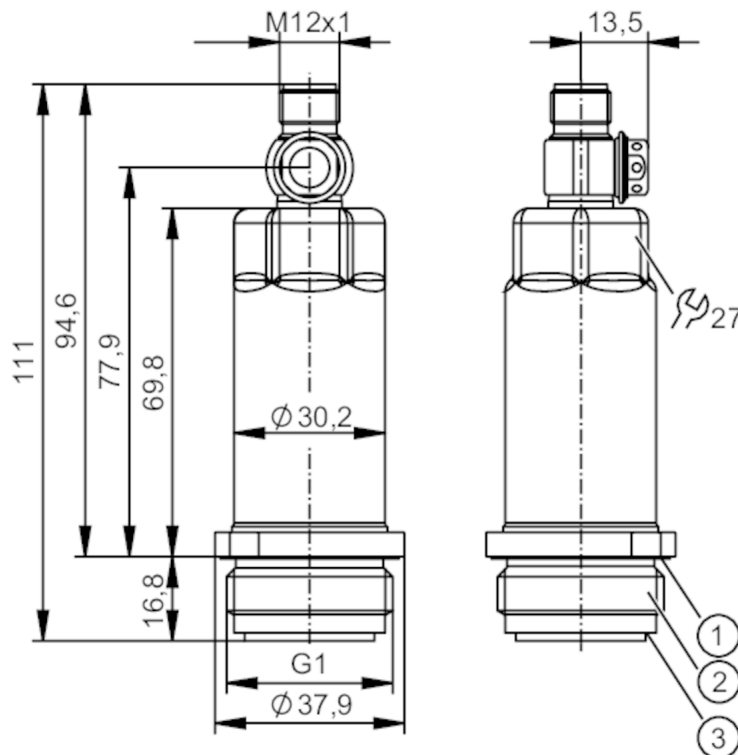

- 1 groove with sealing ring (DIN EN ISO 1179-2)
- 2 external thread G1 (Aseptoflex Vario)
- 3 groove for sealing ring



ACS



CRN



EC 1935/2004

EHEDG

Certified

FCM

FDA

IO-Link

NSF

Reg31



UK

CA

### Product characteristics

|                              |                                                                                                                           |                 |                |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|
| Number of inputs and outputs | Number of digital outputs: 1; Number of analog outputs: 1                                                                 |                 |                |
| Measuring range              | -1...16 bar                                                                                                               | -14.6...232 psi | -0.1...1.6 MPa |
| Process connection           | threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario                                                  |                 |                |
| Note                         | G1 Gewinde nach ISO 228. Alternativ dichtend über rückwärtige Dichtkontur mit Dichtung in Anlehnung an DIN EN ISO 1179-2. |                 |                |

### Application

|                                                |                                                                       |          |         |
|------------------------------------------------|-----------------------------------------------------------------------|----------|---------|
| System                                         | gold-plated contacts                                                  |          |         |
| Measuring element                              | ceramic-capacitive pressure measuring cell                            |          |         |
| Temperature monitoring                         | no                                                                    |          |         |
| Application                                    | flush mountable for the food and beverage industry                    |          |         |
| Media                                          | viscous media and liquids with suspended particles; liquids and gases |          |         |
| Medium temperature [°C]                        | -25...150                                                             |          |         |
| Min. burst pressure                            | 250 bar                                                               | 3625 psi | 25 MPa  |
| Pressure rating                                | 75 bar                                                                | 1085 psi | 7.5 MPa |
| Vacuum resistance [mbar]                       | -1000                                                                 |          |         |
| Type of pressure                               | relative pressure; vacuum                                             |          |         |
| No dead space                                  | yes                                                                   |          |         |
| MAWP (for applications according to CRN) [bar] | 60                                                                    |          |         |

# PM1714



## Flush pressure sensor

PM-016-REA01-E-ZVG/US

| Electrical data                        |                 |                                                                                                    |                                                       |
|----------------------------------------|-----------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Operating voltage                      | [V]             | 18...30 DC                                                                                         |                                                       |
| Min. insulation resistance             | [MΩ]            | 100; (500 V DC)                                                                                    |                                                       |
| Protection class                       |                 | III                                                                                                |                                                       |
| Reverse polarity protection            |                 | yes                                                                                                |                                                       |
| Integrated watchdog                    |                 | yes                                                                                                |                                                       |
| 2-wire                                 |                 |                                                                                                    |                                                       |
| Current consumption                    | [mA]            | 3.5...21.5                                                                                         |                                                       |
| Power-on delay time                    | [s]             | 1                                                                                                  |                                                       |
| 3-wire                                 |                 |                                                                                                    |                                                       |
| Current consumption                    | [mA]            | < 45                                                                                               |                                                       |
| Power-on delay time                    | [s]             | 0.5                                                                                                |                                                       |
| Inputs / outputs                       |                 |                                                                                                    |                                                       |
| Number of inputs and outputs           |                 | Number of digital outputs: 1; Number of analog outputs: 1                                          |                                                       |
| Outputs                                |                 |                                                                                                    |                                                       |
| Total number of outputs                |                 | 2                                                                                                  |                                                       |
| Output signal                          |                 | analog signal; IO-Link; (configurable)                                                             |                                                       |
| Number of digital outputs              |                 | 1; (IO-Link)                                                                                       |                                                       |
| Number of analog outputs               |                 | 1                                                                                                  |                                                       |
| Analog current output                  | [mA]            | 4...20; (scalable)                                                                                 |                                                       |
| Max. load                              | [Ω]             | 700; (Ub = 24 V; (Ub - 9 V) / 21.5 mA)                                                             |                                                       |
| Short-circuit proof                    |                 | yes                                                                                                |                                                       |
| Overload protection                    |                 | yes                                                                                                |                                                       |
| Measuring/setting range                |                 |                                                                                                    |                                                       |
| Measuring range                        |                 | -1...16 bar                                                                                        | -14.6...232 psi<br>-0.1...1.6 MPa                     |
| Analog start point                     |                 | -1...12.8 bar                                                                                      | -14.6...185.6 psi<br>-0.1...1.28 MPa                  |
| Analog end point                       |                 | 2.2...16 bar                                                                                       | 32...232 psi<br>0.22...1.6 MPa                        |
| In steps of                            |                 | 0.01 bar                                                                                           | 0.2 psi<br>0.001 MPa                                  |
| Factory setting                        |                 |                                                                                                    | ASP = 0.0 bar<br>AEP = 16.0 bar                       |
| Accuracy / deviations                  |                 |                                                                                                    |                                                       |
| Repeatability                          | [% of the span] | < ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)                                     |                                                       |
| Characteristics deviation              | [% of the span] | < ± 0,2; (linearity incl. hysteresis and repeatability, limit value setting to DIN EN IEC 62828-1) |                                                       |
| Linearity deviation                    | [% of the span] | < ± 0,15; (Turn down 1:1)                                                                          |                                                       |
| Hysteresis deviation                   | [% of the span] | < ± 0,15; (Turn down 1:1)                                                                          |                                                       |
| Long-term stability                    | [% of the span] | < ± 0,1; (Turn down 1:1; per year)                                                                 |                                                       |
| Total deviation over temperature range |                 | <b>Temperature range</b>                                                                           | <b>total deviation</b>                                |
|                                        |                 | -25...15 °C                                                                                        | Characteristics deviation ± 0,05 % of the span / 10 K |
|                                        |                 | 15...80 °C                                                                                         | Characteristics deviation                             |
|                                        |                 | 80...150 °C                                                                                        | Characteristics deviation ± 0,1 % of the span / 10 K  |

# PM1714



## Flush pressure sensor

PM-016-REA01-E-ZVG/US

Notes on the accuracy /  
deviation

for further details see section Diagrams and graphs

### Reaction times

|                                   |     |       |
|-----------------------------------|-----|-------|
| Damping for the analog output dAA | [s] | 0...4 |
|-----------------------------------|-----|-------|

#### 2-wire

|                                  |      |    |
|----------------------------------|------|----|
| Step response time analog output | [ms] | 30 |
|----------------------------------|------|----|

#### 3-wire

|                                  |      |   |
|----------------------------------|------|---|
| Step response time analog output | [ms] | 7 |
|----------------------------------|------|---|

### Interfaces

|                               |                                                |                                                  |
|-------------------------------|------------------------------------------------|--------------------------------------------------|
| Communication interface       | IO-Link                                        |                                                  |
| Transmission type             | COM2 (38,4 kBaud)                              |                                                  |
| IO-Link revision              | 1.1                                            |                                                  |
| SDCI standard                 | IEC 61131-9                                    |                                                  |
| Profiles                      | Smart Sensor - SSP 3.1<br>Common - I&D         | Measuring Sensor<br>Identification and Diagnosis |
| SIO mode                      | no                                             |                                                  |
| Required master port class    | A                                              |                                                  |
| Process data analog           | 3                                              |                                                  |
| Min. process cycle time       | [ms]                                           | 3.2                                              |
| IO-Link resolution pressure   | [bar]                                          | 0.005                                            |
| IO-Link functions (acyclical) | application specific tag; internal temperature |                                                  |
| Supported DeviceIDs           | Type of operation                              | DeviceID                                         |
|                               | default                                        | 661                                              |

### Operating conditions

|                     |      |                      |
|---------------------|------|----------------------|
| Ambient temperature | [°C] | -25...80             |
| Storage temperature | [°C] | -40...100            |
| Protection          |      | IP 67; IP 68; IP 69K |

### Tests / approvals

|                      |                                                                                                                           |                     |
|----------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------|
| EMC                  | DIN EN 61000-6-2                                                                                                          |                     |
|                      | DIN EN 61000-6-3                                                                                                          |                     |
| Shock resistance     | DIN EN 60068-2-27                                                                                                         | 50 g (11 ms)        |
| Vibration resistance | DIN EN 60068-2-6                                                                                                          | 20 g (10...2000 Hz) |
| MTTF                 | [years]                                                                                                                   | 323                 |
| Note on approval     | Factory certificate available as download at <a href="http://www.factory-certificate.ifm">www.factory-certificate.ifm</a> |                     |
| UL approval          | UL approval number                                                                                                        | J021                |

### Mechanical data

|                          |      |                                                                                                                                              |
|--------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                   | [g]  | 308.3                                                                                                                                        |
| Housing                  |      | tubular                                                                                                                                      |
| Dimensions               | [mm] | Ø 30.2 / L = 111                                                                                                                             |
| Material                 |      | stainless steel (1.4404 / 316L); PBT                                                                                                         |
| Materials (wetted parts) |      | ceramics (99.9 % Al <sub>2</sub> O <sub>3</sub> ); stainless steel (1.4435 / 316L)<br>surface characteristics: Ra < 0,4 µm / Rz = 4 µm; PTFE |
| Min. pressure cycles     |      | 100 million                                                                                                                                  |

PM1714



Flush pressure sensor

PM-016-REA01-E-ZVG/US


|                    |                                                                          |    |
|--------------------|--------------------------------------------------------------------------|----|
| Tightening torque  | [Nm]                                                                     | 35 |
| Process connection | threaded connection G 1 external thread mit Dichtkontur Aseptoflex Vario |    |
| Remarks            |                                                                          |    |
| Pack quantity      | 1 pcs.                                                                   |    |

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

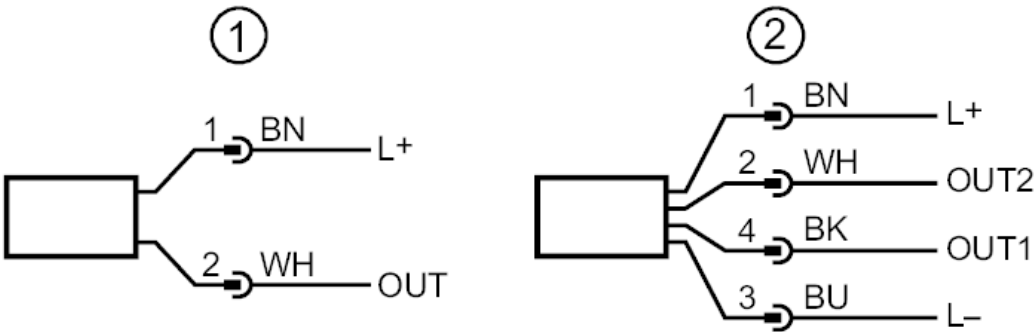

- 1
- connection for 2-wire operation ( analog )
- 2
- connection for 3-wire operation ( analog / IO-Link )  
OUT1 : IO-Link  
OUT2 : analog output




## Flush pressure sensor

PM-016-REA01-E-ZVG/US

### Diagrams and graphs

ambient temperature influence on the accuracy

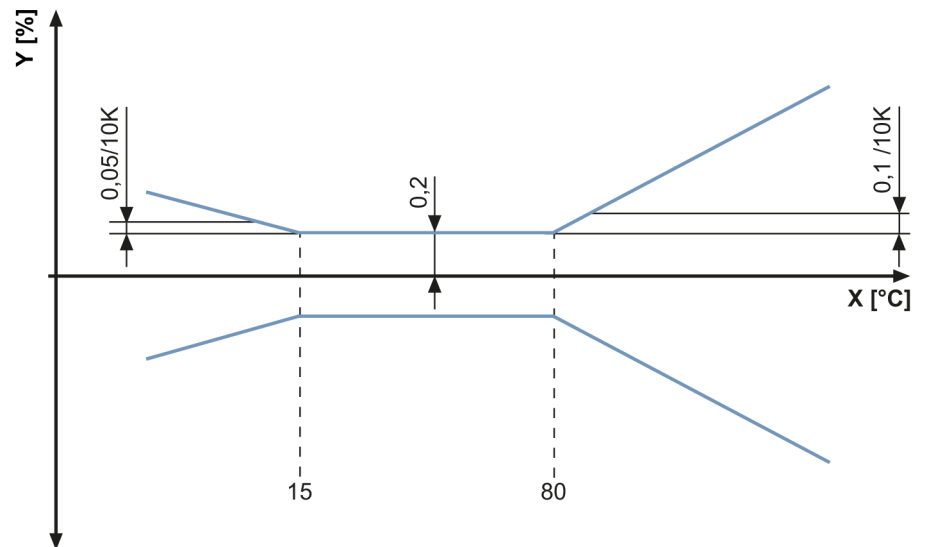

X temperature  
Y total deviation