



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M FEP CABLE



Product characteristics

Number of inputs and outputs	Number of analog outputs: 1				
Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH ₂ O	0...60 kPa

Application

Design	with capillary tube for pressure compensation		
Application	for industrial applications		
Media	Liquids		
Medium temperature [°C]	-10...85		
Min. burst pressure	4 bar	58 psi	400 kPa
Pressure rating	3 bar	43.5 psi	300 kPa
Type of pressure	relative pressure		

Electrical data

Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
Output signal	analog signal
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	700; (U _b = 24 V; (U _b - 10 V) / 20 mA)
Short-circuit protection	yes

Measuring/setting range

Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH ₂ O	0...60 kPa
-----------------	-------------	--------------	-------------	------------------------------	------------

Accuracy / deviations

Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation [% of the span]	< 0,25 (BFSL) / 0,5; (incl. linearity, zero and span error (limit value setting))
Linearity deviation [% of the span]	< 0,2 (BFSL)
Long-term stability [% of the span]	< 0,2; (per year)
Temperature coefficient zero point	< ± 0,2; (0...50 °C)


PS4407



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M FEP CABLE

[% of the span / 10 K]		
Temperature coefficient span [% of the span / 10 K]		< ± 0,2; (0...50 °C)
Operating conditions		
Ambient temperature	[°C]	-10...85
Storage temperature	[°C]	-30...80
Protection		IP 68
Tests / approvals		
MTTF	[years]	403
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request
Mechanical data		
Weight	[g]	1019.75
Housing		tubular
Dimensions	[mm]	Ø 27 / L = 147
Material		stainless steel (1.4571/316Ti); PA
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 10 m, FEP, Ø 7.5 mm		
Connection		

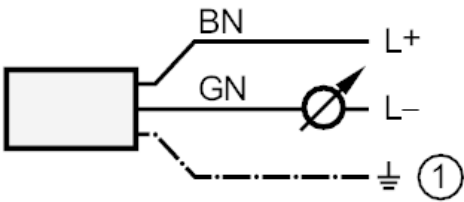

- 1: screen (connected to the housing)
- Core colors :
- BN = brown
- GN = green