


RM7013



Absolute multiturn encoder with solid shaft

RMK0025-H24/E

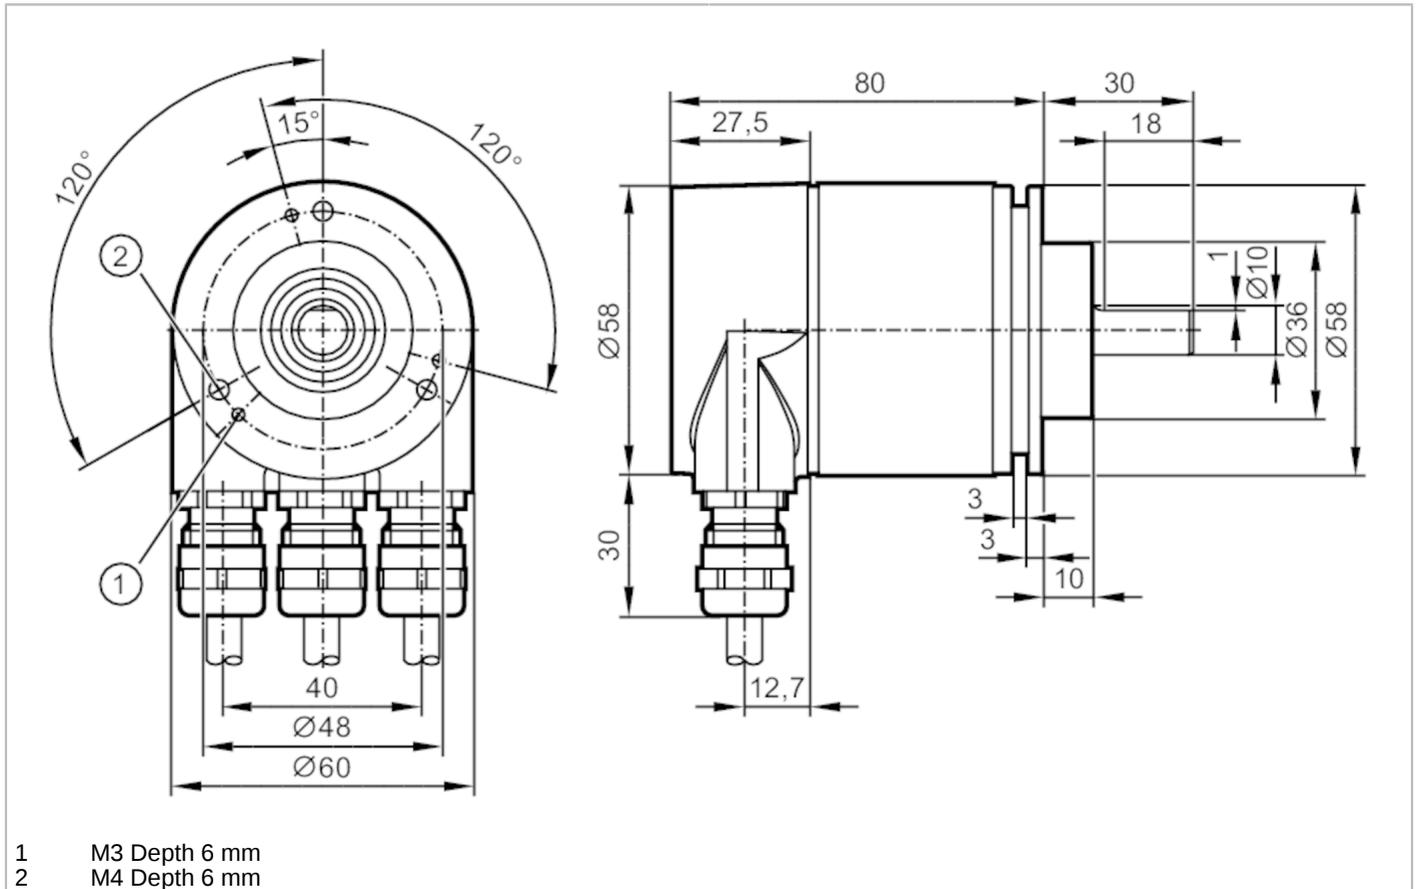

Product characteristics	
Resolution	8192 steps; 4096 revolutions; 25 bit
Communication interface	DeviceNet
Shaft design	solid shaft
Shaft diameter [mm]	10
Application	
Function principle	absolute
Revolution type	multiturn
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	230; ((10 V DC); 100 (24 V DC))
Reverse polarity protection	yes
Outputs	
Short-circuit protection	yes
Code	binary
Measuring/setting range	
Resolution	8192 steps; 4096 revolutions; 25 bit

RM7013



Absolute multiturn encoder with solid shaft

RMK0025-H24/E

Software / programming	
Parameter setting options	resolution per revolution; total resolution; Direction of rotation; preset value; Type of operation; MAC ID; Baud rate
Addressing	address selector switch; 0...99; Terminating resistor
Interfaces	
Communication interface	DeviceNet
DeviceNet	
Protocol	CIP (Common Industrial Protocol)
Operating conditions	
Ambient temperature [°C]	-40...85
Max. relative air humidity [%]	98
Protection	IP 67
Tests / approvals	
Shock resistance	100 g (6 ms)
Vibration resistance	10 g (10...1000 Hz)
MTTF [years]	13
Mechanical data	
Weight [g]	592
Housing	tubular
Dimensions [mm]	Ø 58 / L = 110
Material	housing cap: aluminum; housing: steel
Max. revolution, mechanical [U/min]	12000
Shaft design	solid shaft
Shaft diameter [mm]	10
Shaft material	stainless steel (1.4305 / 303)
Max. shaft load axial (at the shaft end) [N]	40
Max. shaft load radial (at the shaft end) [N]	110
Fixing flange	Clamping flange
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Terminal strip in the terminal chamber:	