


SL0201



Airflow monitor

SLG23CEEAKOW/24VAC

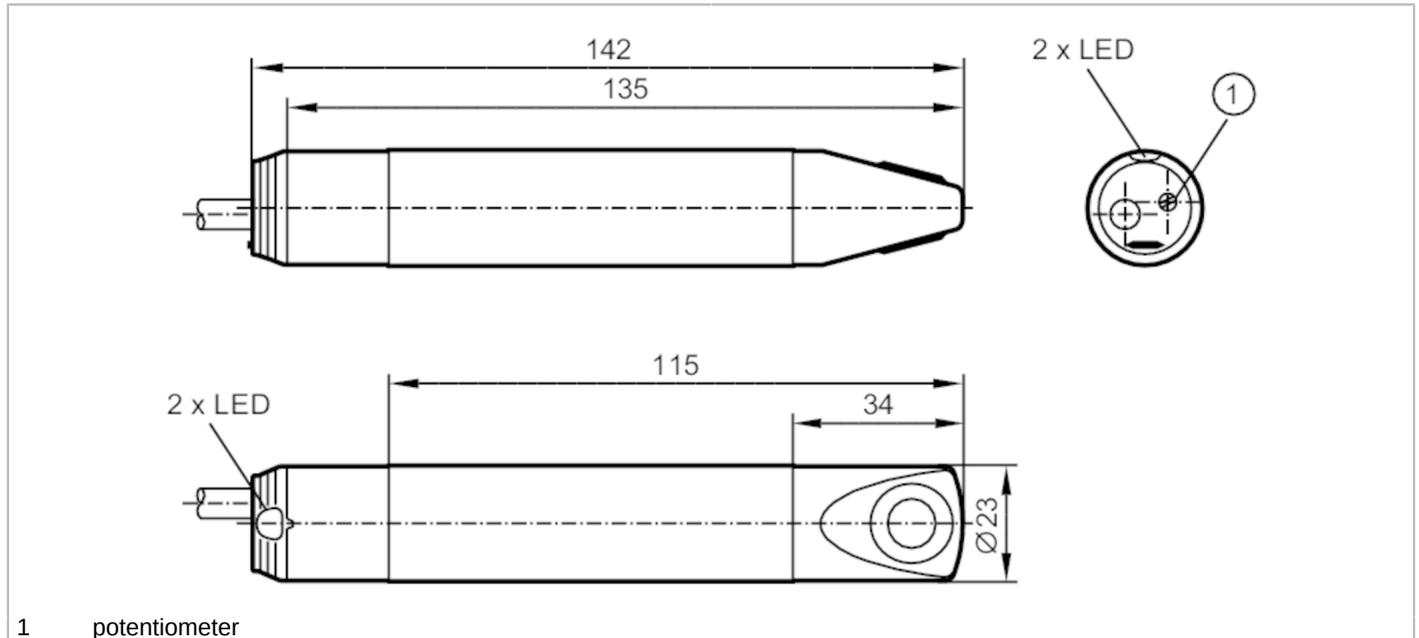

1 potentiometer



Product characteristics

Number of inputs and outputs	Number of relay outputs: 1
Process connection	Clamp fitting Ø 23 mm

Application

Medium temperature	[°C]	-10...50
Pressure rating	1 bar	0.1 MPa

Electrical data

Operating voltage	[V]	21.6...26.6 AC
Current consumption	[mA]	50
Min. insulation resistance	[MΩ]	100; (500 V DC)
Reverse polarity protection		no
Power-on delay time	[s]	60

Inputs / outputs

Number of inputs and outputs	Number of relay outputs: 1
------------------------------	----------------------------

Outputs

Output signal	switching signal
Number of relay outputs	1
Contact rating	3 A (30 V DC / 250 V AC // cULus: 30 V DC / AC)
Switching function flow monitoring	relay energized when flow is present
Short-circuit proof	no
Overload protection	no

Measuring/setting range

Gases	
Setting range	[cm/s] 100...1000

SL0201



Airflow monitor

SLG23CEEAKOW/24VAC

Greatest sensitivity	[cm/s]	100...400
Accuracy / deviations		
Max. temperature gradient of medium	[K/min]	5
Reaction times		
Response time	[s]	3...60
Gases		
Response time	[s]	3...60
Software / programming		
Adjustment of the switch point		potentiometer
Operating conditions		
Ambient temperature	[°C]	-10...50
Storage temperature	[°C]	-25...85
Protection		IP 65
Tests / approvals		
MTTF	[years]	877
UL approval	UL approval number	I030
	File number UL	E174189
Mechanical data		
Weight	[g]	198.5
Housing		tubular
Dimensions	[mm]	Ø 23 / L = 142
Material		housing: PBT; sensor surface: titanium
Materials (wetted parts)		PBT; titanium
Process connection		Clamp fitting Ø 23 mm
Displays / operating elements		
Display	Function	1 x LED, red
	Function	1 x LED, green
Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 5 A; fast acting
Accessories		
Items supplied		Mounting clamp: 1, E40048
Remarks		
Remarks		Recommendation Check the safe functioning of the unit after a short circuit.
Pack quantity		1 pcs.

SL0201




Airflow monitor

SLG23CEEAKOW/24VAC

Electrical connection

Cable: 2 m, PUR; 4 x 0.5 mm²

Connection

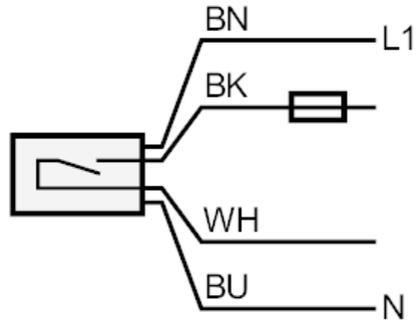

Note miniature fuse to IEC60127-2 sheet 1 \leq 5 A fast acting
Core colors :

BN = brown
BU = blue
BK = black
WH = white