




Control monitor for flow sensors

VS3000/85...265VAC

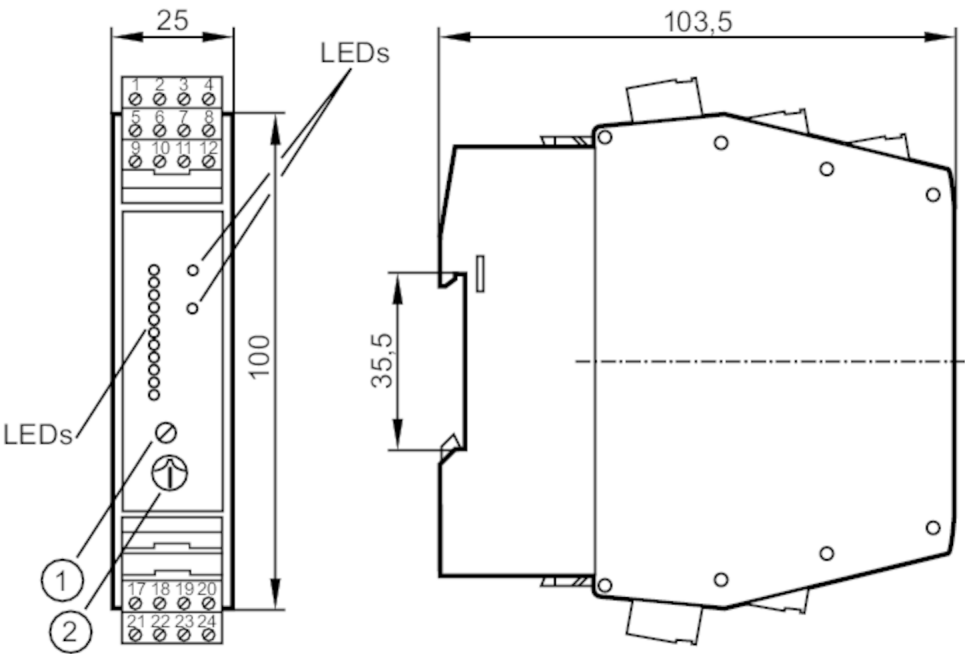

- 1 Potentiometer (switch point flow)
2 Potentiometer (switch point temperature)



Application		
Application	Flow monitoring; Temperature monitoring; Wire break monitoring	
Electrical data		
Frequency AC	[Hz]	47...63
Operating voltage tolerance	[%]	-5...10
Operating voltage	[V]	90...240 AC
Max. power consumption	[VA]	4
Protection class		II
Reverse polarity protection		no
Power-on delay time	[s]	10...80; (adjustable (fixed-value resistors terminals 22-23))
Number of channels		1
Outputs		
Performance in case of a fault	In case of undervoltage all relays are de-energized, the LED "LOW VOLTAGE/WIRE BREAK-RELAY" lights	
Electrical design	Relay	
Contact rating	4 A (250 V AC / 30 V DC)	
Switching function flow monitoring	relay energized when flow is present and during the power-on delay time	
Switching function temperature monitoring	relay de-energized when temperature is exceeded	
Switching function wire break monitoring	relay de-energized in case of wire-break or short circuit	
Short-circuit proof	no	



Control monitor for flow sensors

VS3000/85...265VAC

Overload protection	no	
Reaction times		
Response time	[s]	< 3
Software / programming		
Adjustment of the switch point	potentiometer	
Selection liquids / gases	wire bridge; on delivery: monitoring of liquids.; for monitoring of gases: link terminals 23 / 24.	
Switch point setting	potentiometer	
Temperature range	[°C]	0...80
Repeatability switch point / measured value	[K]	4
Operating conditions		
Ambient temperature	[°C]	-20...60
Note on ambient temperature	in case of sufficient free space for convection cooling	
Protection	IP 20	
Tests / approvals		
MTTF	[years]	168
Mechanical data		
Weight	[g]	249
Housing	rectangular	
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	100 x 25 x 103.5
Material	PBT	
Displays / operating elements		
Display	Function	11 x LED
	Switching status	LED, red
	Switching status	LED, red
Electrical connection		
Required protection	miniature fuse to IEC60127-2 sheet 1; ≤ 5 A; fast acting	
Remarks		
Remarks	Recommendation Check the safe functioning of the unit after a short circuit.	
Pack quantity	1 pcs.	

SN0151


Control monitor for flow sensors

VS3000/85...265VAC

Electrical connection

Combicon connector:

Connection

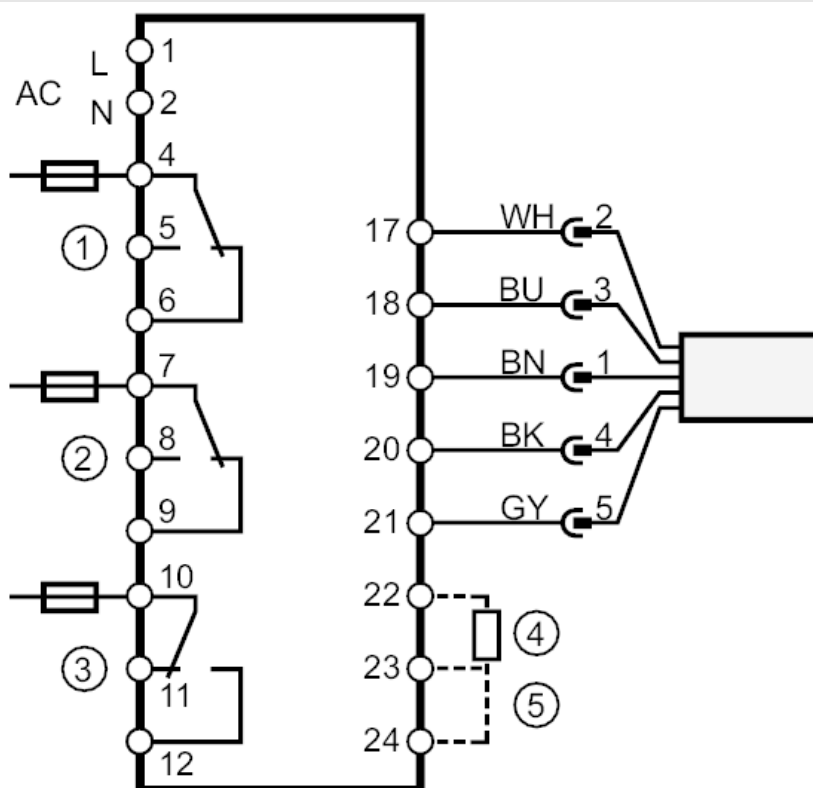

- | | |
|------|--|
| 1 = | Flow monitoring |
| 2 = | Wire break monitoring |
| 3 = | Temperature monitoring |
| 4 = | Power-on delay time |
| 5 = | Selection liquid / gas |
| Note | miniature fuse to IEC60127-2 sheet 1 ≤ 5 A fast acting |
| | Core colors : |
| BN = | brown |
| BU = | blue |
| BK = | black |
| WH = | white |
| GY = | grey |