


SR0127



Control monitor for flow sensors

VS0200/ 24VDC

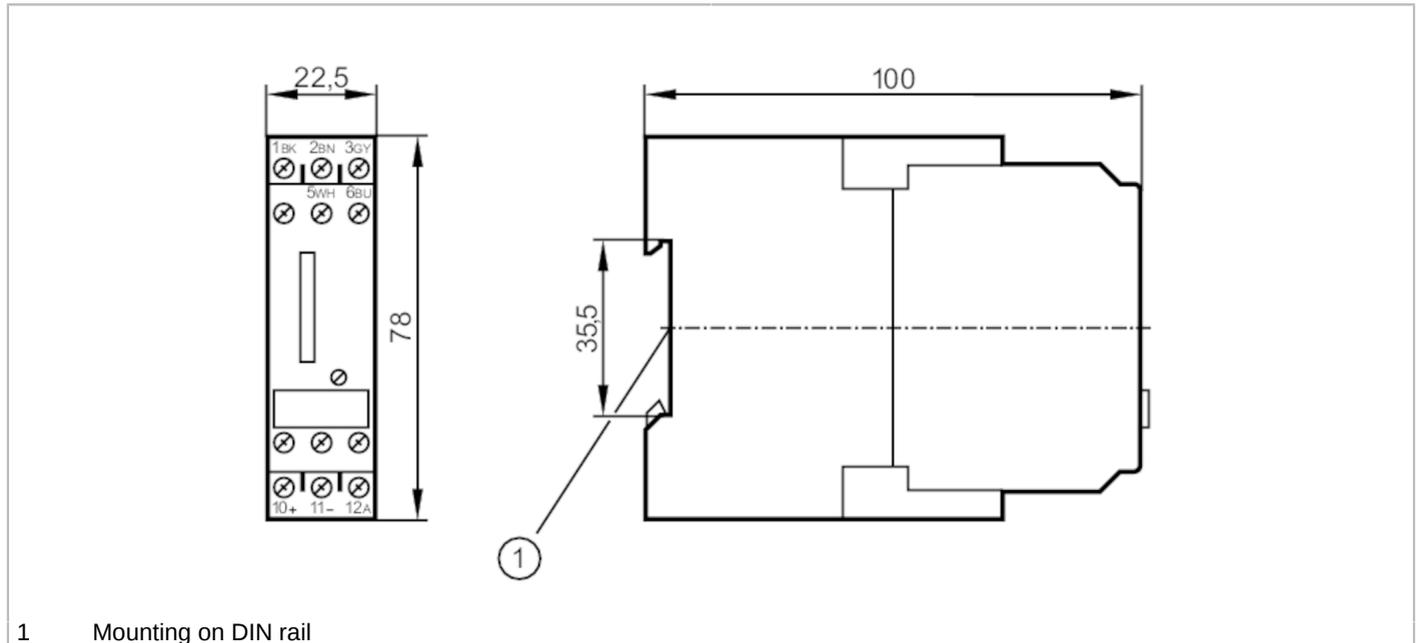

1 Mounting on DIN rail



Application	
Application	Flow monitoring
Media	Liquids
Electrical data	
Operating voltage tolerance [%]	-10...10
Operating voltage [V]	24 DC
Current consumption [mA]	< 45
Reverse polarity protection	yes
Power-on delay time [s]	< 20
Number of channels	1
Outputs	
Electrical design	PNP
Permanent current rating of switching output DC [mA]	400
Switching function flow monitoring	output switches ON when flow is present
Switching function wire break monitoring	output switches OFF in case of wire break
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes
Software / programming	
Adjustment of the switch point	potentiometer
Operating conditions	
Ambient temperature [°C]	0...60

SR0127



Control monitor for flow sensors

VS0200/ 24VDC

Protection	IP 50
Protection rating terminals	IP 20

Tests / approvals

MTTF	[years]	624
------	---------	-----

Mechanical data

Weight	[g]	142.5
Housing		rectangular
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	78 x 22.5 x 100
Material		plastics

Displays / operating elements

Display	Function	11 x LED
---------	----------	----------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 12 x ...2.5 mm²

Connection

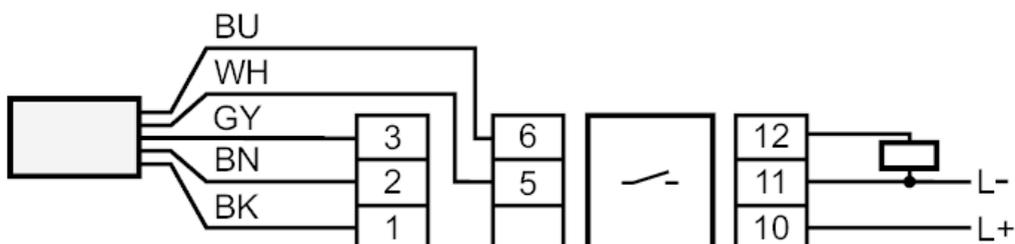

Core colors :
BN = brown
BU = blue
BK = black
WH = white
GY = grey