


SU2021



Ultrasonic flow meter

SUR21XXBFRKG/US

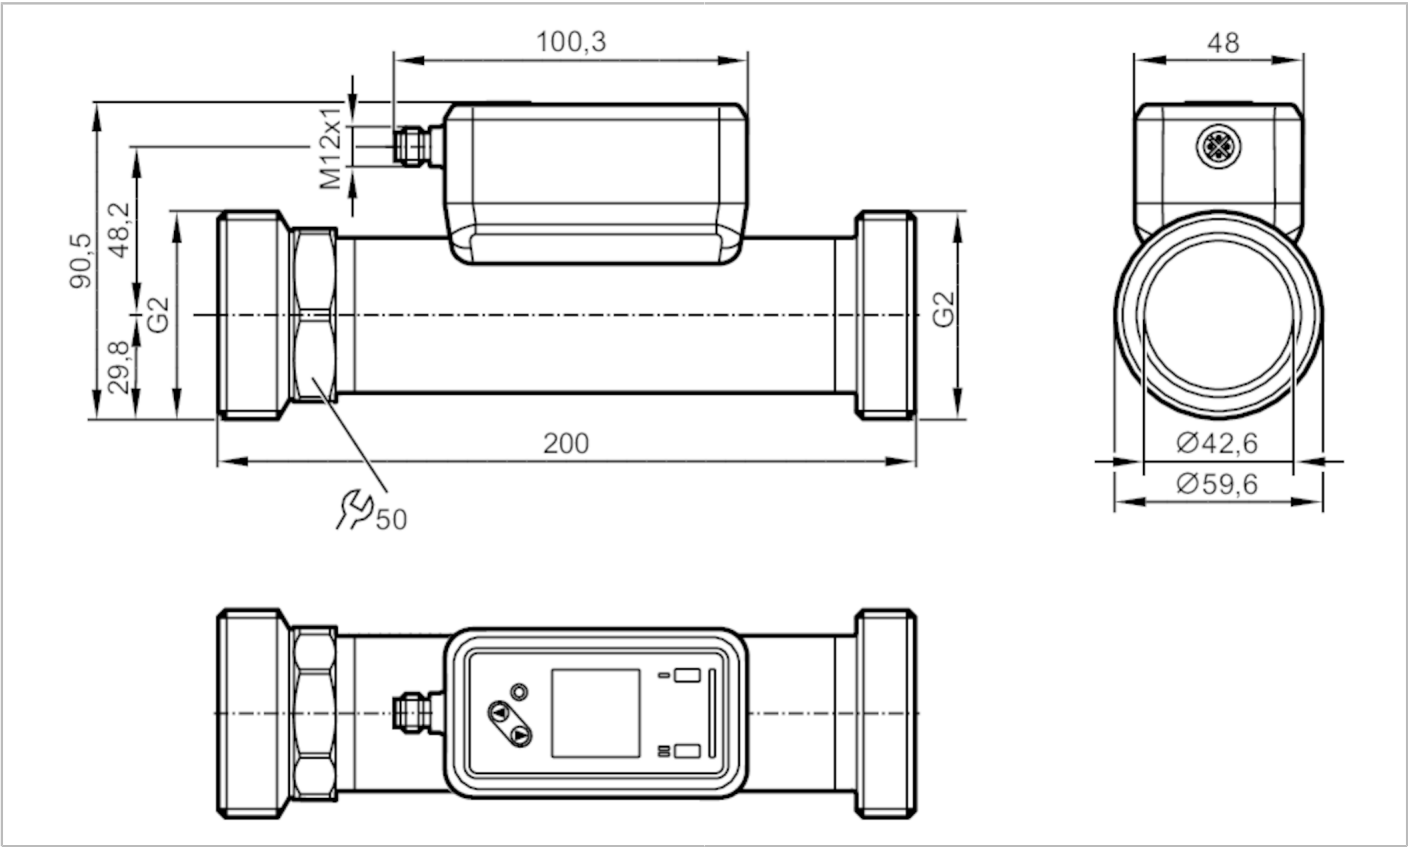

ACS CE PA CRN cUL US LISTED IO-Link KTW/W270 NSF Reg31

Product characteristics

Measuring range	5...1000 l/min	0.3...60 m³/h	79...15850 gph	1.32...264.18 gpm
Process connection	threaded connection G 2 external thread DN50			

Application

System	gold-plated contacts	
Media	ultra-pure water; water; water-based media	
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value	
Medium temperature	-20...100 °C	-4...212 °F
Min. burst pressure	150 bar	15 MPa
Pressure rating	100 bar	10 MPa
Vacuum resistance [mbar]	-1000	
MAWP (for applications according to CRN)	36.6 bar	3.66 MPa

Electrical data

Operating voltage [V]	18...32 DC; (to SELV/PELV)
Current consumption [mA]	< 75
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	5
Measuring principle	ultrasonic



Ultrasonic flow meter

SUR21XXBFRKG/US

Inputs					
Inputs		counter reset			
Outputs					
Total number of outputs		2			
Output signal		switching signal; pulse signal; analog signal; IO-Link; frequency signal; diagnostic signal; totalizer switching signal			
Electrical design		PNP/NPN			
Output function		normally open / closed; (configurable)			
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	0...10000			
Analog current output	[mA]	4...20			
Max. load	[Ω]	500			
Pulse output		flow rate meter			
Short-circuit protection		yes			
Type of short-circuit protection		yes (non-latching)			
Overload protection		yes			
Measuring/setting range					
Measuring range		5...1000 l/min	0.3...60 m³/h	79...15850 gph	1.32...264.18 gpm
Display range		-1200...1200 l/min	-72...72 m³/h	-19020...19020 gph	-317...317 gpm
Resolution		0.1 l/min	0.001 m³/h	1 gph	0.01 gpm
Set point SP		10.5...1000 l/min	0.63...60 m³/h	166...15850 gph	2.77...264.17 gpm
Reset point rP		5.3...994.8 l/min	0.318...59.688 m³/h	84...15768 gph	1.4...262.8 gpm
Analog start point ASP		-1000...800 l/min	-60...48000 m³/h	-15850...12680 gph	-264.17...211.34 gpm
Analog end point AEP		-800...1000 l/min	-48...60 m³/h	-12680...15850 gph	-211.34...264.17 gpm
Low flow cut-off LFC		5...50 l/min	0.3...3 m³/h	79...793 gph	1.32...13.21 gpm
Frequency end point, FEP		200.6...1000 l/min	12.037...60 m³/h	3180...15850 gph	53...264.17 gpm
Frequency at the end point FRP	[Hz]	1...10000			
Volumetric flow quantity monitoring					
Pulse length		[s]	0.002...2		
Pulse value		0.1...99990000 l; 0.026...26414563.515 gal			
Temperature monitoring					
Measuring range		-20...100 °C		-4...212 °F	
Display range		-44...124 °C		-47.2...255.2 °F	
Resolution		0.1 °C		0.1 °F	
Set point SP		-19.6...100 °C		-3.2...212 °F	
Reset point rP		-20...99.6 °C		-4...211.2 °F	
Analog start point		-20...76 °C		-4...168.8 °F	
Analog end point		4...100 °C		39.2...212 °F	
Frequency start point, FSP		-20...76 °C		-4...168.8 °F	
Frequency end point, FEP		4...100 °C		39.2...212 °F	
Frequency at the end point FRP	[Hz]	1...10000			



Ultrasonic flow meter

SUR21XXBFRKG/US

Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	± (1,0 % MW + 0,5 % MEW)	
Repeatability	± 0,2 % MEW	
Temperature monitoring		
Accuracy [K]	± 2,5 (Q > 5 % MEW)	
Temperature coefficient [% of the span / 10 K]	0,2	
Reaction times		
Flow monitoring		
Response time [s]	< 0.25; (dAP = 0, T09)	
Damping process value dAP [s]	0...5	
Temperature monitoring		
Dynamic response T05 / T09 [s]	5,7 / 86	
Software / programming		
Diagnostic functions	direction of flow detection; signal quality	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1.3	
SDCI standard	IEC 61131-9: 2013-07	
Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time [ms]	9.6	
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
Supported DeviceIDs	Type of operation	DeviceID
	default	1464
Operating conditions		
Ambient temperature [°C]	-20...60	
Storage temperature [°C]	-25...80	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN 61326-1:2021	
CPA approval	model number	002US
	accuracy class	1,5



Ultrasonic flow meter

SUR21XXBFRKG/US

Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
MTTF [years]	160	
UL approval	UL approval number	I033
	File number UL	E174189
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data

Weight [g]	1173	
Housing	rectangular	
Type of mounting	inlet pipe length 5xDN; outlet pipe length 1xDN	
Dimensions [mm]	200 x 59.6 x 90.5	
Material	housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT	
Materials (wetted parts)	Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket	
Process connection	threaded connection G 2 external thread DN50	
Surface characteristics Ra/Rz of the wetted parts	Ra < 1.25 µm	

Displays / operating elements

Display	Color display 1,44", 128 x 128 pixels
Switching function	2 x LED, yellow
diagnosis	1 x LED, three-color

Accessories

Items supplied	Gasket 2, Centellen
	package insert

Remarks

Remarks	MW = Measured value
	MEW = Final value of the measuring range
	pulse and totalizer signal are only available for one of the two outputs
	the accuracy indications are adhered to over the entire application area
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated






Ultrasonic flow meter

SUR21XXBFRKG/US

Connection

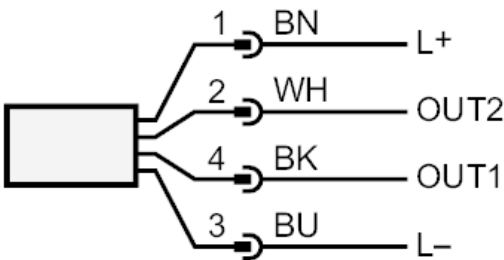

- OUT1/IO-Link:
- Switching output Volumetric flow quantity monitoring
 - Switching output Temperature monitoring
 - Pulse output quantity meter
 - Frequency output Volumetric flow quantity monitoring
 - Frequency output Temperature monitoring
 - signal output Preset counter
- OUT2/InD:
- Switching output Volumetric flow quantity monitoring
 - Switching output Temperature monitoring
 - Pulse output quantity meter
 - analog output flow
 - analog output temperature
 - signal output Preset counter
 - Input counter reset


Colors to DIN EN 60947-5-2

Core colors

- BK= black
- BN= brown
- BU= blue
- WH= white

Diagrams and graphs

Note on pressure loss

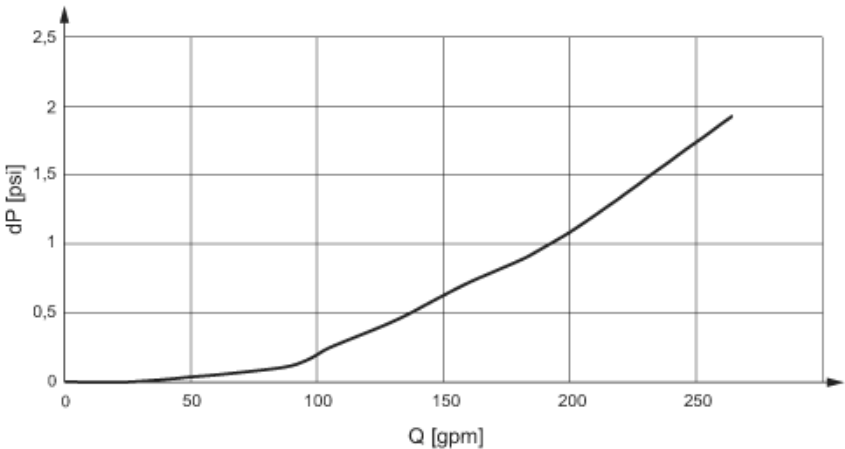


SU2021

Ultrasonic flow meter

SUR21XXBFRKG/US



derating ambient temperature



- 1 Ambient temperature
- 2 Medium temperature