


# SU6031



## Ultrasonic flow meter

SUR12XFBFRKG/US

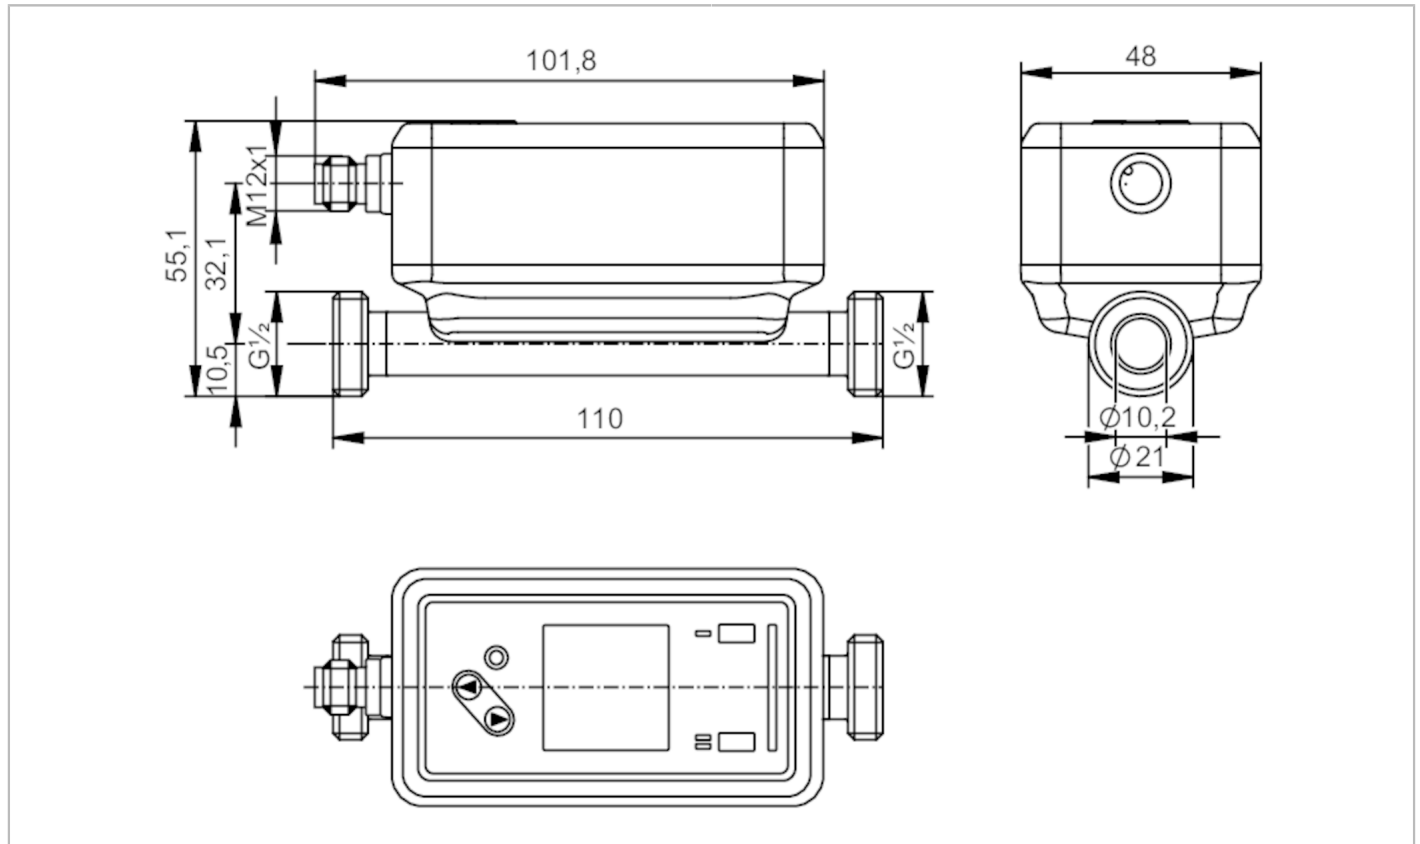

ACS KTW/W270 Reg31

| Product characteristics     |  |
|-----------------------------|--|
| Measuring range             | 0.5...65 l/min    0.03...3.9 m <sup>3</sup> /h    8...1030 gph    0.13...17.17 gpm   |
| Process connection          | threaded connection G 1/2 external thread DN15   |
| Application                 |  |
| System                      | gold-plated contacts   |
| Media                       | ultra-pure water; water; water-based media; glycol solutions; oils; Coolants   |
| Note on media               | water-based media: for media with >10 % additives, the repeatability is the only available value<br>low-viscosity oils with viscosity: 7...40 mm <sup>2</sup> /s (40 °C)<br>high-viscosity oils with viscosity: 30...68 mm <sup>2</sup> /s (40 °C) |
| Medium temperature          | -20...100 °C    -4...212 °F  |
| Min. burst pressure         | 150 bar    15 MPa  |
| Pressure rating             | 100 bar    10 MPa  |
| Vacuum resistance [mbar]    | -1000  |
| Electrical data             |  |
| Operating voltage [V]       | 18...32 DC; (to SELV/PELV)   |
| Current consumption [mA]    | < 75   |
| Protection class            | III  |
| Reverse polarity protection | yes  |
| Power-on delay time [s]     | 5  |
| Measuring principle         | ultrasonic   |

# SU6031



## Ultrasonic flow meter

SUR12XFBFRKG/US

| Inputs   |   |                   |                  |                    |
|--|---|-------------------|------------------|--------------------|
| Inputs   | counter reset   |                   |                  |                    |
| Outputs  |   |                   |                  |                    |
| Total number of outputs                              | 2   |                   |                  |                    |
| Output signal  | switching signal; pulse signal; analog signal; IO-Link; frequency signal; diagnostic signal; totalizer switching signal |                   |                  |                    |
| Electrical design                                    | PNP/NPN   |                   |                  |                    |
| Output function                                      | normally open / closed; (configurable)  |                   |                  |                    |
| Max. voltage drop switching output DC [V]            | 2   |                   |                  |                    |
| Permanent current rating of switching output DC [mA] | 100   |                   |                  |                    |
| Switching frequency DC [Hz]                          | 0...10000   |                   |                  |                    |
| Analog current output [mA]                           | 4...20  |                   |                  |                    |
| Max. load [Ω]  | 500   |                   |                  |                    |
| Pulse output   | flow rate meter   |                   |                  |                    |
| Short-circuit protection                             | yes   |                   |                  |                    |
| Type of short-circuit protection                     | yes (non-latching)  |                   |                  |                    |
| Overload protection                                  | yes   |                   |                  |                    |
| Measuring/setting range                              |   |                   |                  |                    |
| Measuring range                                      | 0.5...65 l/min  | 0.03...3.9 m³/h   | 8...1030 gph     | 0.13...17.17 gpm   |
| Display range  | -78...78 l/min  | -4.68...4.68 m³/h | -1236...1236 gph | -20.61...20.61 gpm |
| Resolution   | 0.1 l/min   | 0.002 m³/h        | 1 gph            | 0.01 gpm           |
| Set point SP   | 0.9...65 l/min  | 0.052...3.9 m³/h  | 14...1030 gph    | 0.23...17.17 gpm   |
| Reset point rP                                       | 0.5...64.7 l/min  | 0.032...3.88 m³/h | 8...1025 gph     | 0.14...17.08 gpm   |
| Analog start point ASP                               | -65...52 l/min  | -3.9...3.12 m³/h  | -1030...824 gph  | -17.17...13.74 gpm |
| Analog end point AEP                                 | -52...65 l/min  | -3.12...3.9 m³/h  | -824...1030 gph  | -13.74...17.17 gpm |
| Low flow cut-off LFC                                 | 0.5...3.2 l/min   | 0.03...0.195 m³/h | 8...52 gph       | 0.13...0.86 gpm    |
| Frequency end point, FEP                             | 13...65 l/min   | 0.782...3.9 m³/h  | 207...1030 gph   | 3.44...17.17 gpm   |
| Frequency at the end point FRP [Hz]                  | 1...10000   |                   |                  |                    |
| Volumetric flow quantity monitoring                  |   |                   |                  |                    |
| Pulse length [s]                                     | 0.002...2   |                   |                  |                    |
| Pulse value  | 0.02...99990000 l; 0.005...26414563.515 gal   |                   |                  |                    |
| Temperature monitoring                               |   |                   |                  |                    |
| Measuring range                                      | -20...100 °C  |                   | -4...212 °F      |                    |
| Display range  | -44...124 °C  |                   | -47.2...255.2 °F |                    |
| Resolution   | 0.1 °C  |                   | 0.1 °F           |                    |
| Set point SP   | -19.6...100 °C  |                   | -3.2...212 °F    |                    |
| Reset point rP                                       | -20...99.6 °C   |                   | -4...211.2 °F    |                    |
| Analog start point                                   | -20...76 °C   |                   | -4...168.8 °F    |                    |
| Analog end point                                     | 4...100 °C  |                   | 39.2...212 °F    |                    |
| Frequency start point, FSP                           | -20...76 °C   |                   | 4...168.8 °F     |                    |
| Frequency end point, FEP                             | 4...100 °C  |                   | 4...212 °F       |                    |
| Frequency at the end point FRP [Hz]                  | 1...10000   |                   |                  |                    |



## Ultrasonic flow meter

SUR12XFBFRKG/US


| Accuracy / deviations                          |  |  |
|--|--|--|
| Flow monitoring                                |  |  |
| Accuracy (in the measuring range)              | glycol solutions (35%)   | $\pm(5,0 \% \text{ MW} + 0,5 \% \text{ MEW})$  |
|  | high-viscosity oils with viscosity 46mm <sup>2</sup> /s (40°C) | $\pm(5,0 \% \text{ MW} + 1,0 \% \text{ MEW})$  |
|  | low-viscosity oils with viscosity 10mm <sup>2</sup> /s (40°C)  | $\pm(5,0 \% \text{ MW} + 1,0 \% \text{ MEW})$  |
|  | water  | $\pm (2,0 \% \text{ MW} + 0,5 \% \text{ MEW})$ |
| Repeatability                                  | $\pm 0,2 \% \text{ MEW}$                                       |  |
| Temperature monitoring                         |  |  |
| Accuracy [K]                                   | $\pm 2,5 (Q > 5 \% \text{ MEW})$                               |  |
| Temperature coefficient [% of the span / 10 K] | 0,2  |  |
| Reaction times                                 |  |  |
| Flow monitoring                                |  |  |
| Response time [s]                              | < 0.25; (dAP = 0, T09)   |  |
| Damping process value dAP [s]                  | 0...5  |  |
| Temperature monitoring                         |  |  |
| Dynamic response T05 / T09 [s]                 | 5,7 / 86   |  |
| Software / programming                         |  |  |
| Diagnostic functions                           | direction of flow detection; signal quality                    |  |
| Interfaces                                     |  |  |
| Communication interface                        | IO-Link  |  |
| Transmission type                              | COM2 (38,4 kBaud)  |  |
| IO-Link revision                               | 1.1.3  |  |
| SDCI standard                                  | IEC 61131-9: 2013-07   |  |
| Profiles                                       | BLOB   | Binary Large Object transfer                   |
|  | Common - I&D   | Identification and Diagnosis                   |
| Required master port class                     | A  |  |
| Process data analog                            | 3  |  |
| Process data binary                            | 2  |  |
| Min. process cycle time [ms]                   | 9.6  |  |
| IO-Link process data (cyclical)                | <b>Function</b>  | <b>bit length</b>                              |
|  | totalizer  | 32   |
|  | Flow monitoring  | 32   |
|  | Temperature monitoring   | 32   |
|  | status   | 4  |
|  | Output 1   | 1  |
|  | Output 2   | 1  |
| Supported DeviceIDs                            | <b>Type of operation</b>                                       | <b>DeviceID</b>                                |
|  | default  | 1755   |
| Operating conditions                           |  |  |
| Ambient temperature [°C]                       | -20...60   |  |
| Storage temperature [°C]                       | -25...80   |  |
| Protection                                     | IP 65; IP 67   |  |

# SU6031



## Ultrasonic flow meter

SUR12XFBFRKG/US

| Tests / approvals   |  |
|---|--|
| EMC   | DIN 61326-1:2021   |
| Shock resistance  | DIN IEC 68-2-27 20 g (11ms)  |
| Vibration resistance  | DIN IEC 68-2-6 20 g (10...2000Hz)  |
| MTTF [years]  | 160  |
| UL approval   | UL approval number I034  |
| Pressure equipment directive  | can be used for group 2 fluids; group 1 fluids on request  |
| Mechanical data   |  |
| Weight [g]  | 475.8  |
| Housing   | rectangular  |
| Type of mounting  | inlet pipe length 5xDN; outlet pipe length 1xDN  |
| Dimensions [mm]   | 110 x 48 x 55.1  |
| Material  | housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT           |
| Materials (wetted parts)  | Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket |
| Process connection  | threaded connection G 1/2 external thread DN15   |
| Surface characteristics Ra/Rz of the wetted parts                                   | Ra < 1.25 µm   |
| Displays / operating elements   |  |
| Display   | Color display 1,44", 128 x 128 pixels  |
|   | Switching function 2 x LED, yellow   |
|   | diagnosis 1 x LED, three-color   |
| Display unit  | l/min; l/h; m³/h; m/s; gpm; gph; ft/s; oz/min  |
| Accessories   |  |
| Items supplied  | Gasket 2, Centellen package insert   |
| Remarks   |  |
| Remarks   | MW = Measured value  |
|   | MEW = Final value of the measuring range   |
|   | pulse and totalizer signal are only available for one of the two outputs                               |
|   | the accuracy indications are adhered to over the entire application area                               |
| Pack quantity   | 1 pcs.   |
| Electrical connection   |  |
| Connector: 1 x M12; coding: A; Contacts: gold-plated                                |  |
|  |  |


# SU6031



## Ultrasonic flow meter

SUR12XFBFRKG/US

### Connection

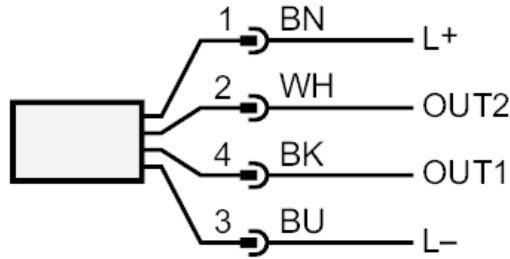


- OUT1/IO-Link:
- Switching output Volumetric flow quantity monitoring
  - Switching output Temperature monitoring
  - Pulse output quantity meter
  - Frequency output Volumetric flow quantity monitoring
  - Frequency output Temperature monitoring
  - Diagnostic output direction of flow detection / signal quality
  - signal output Preset counter
- OUT2/InD:
- Switching output Volumetric flow quantity monitoring
  - Switching output Temperature monitoring
  - Pulse output quantity meter
  - analog output flow
  - analog output temperature
  - Diagnostic output direction of flow detection / signal quality
  - signal output Preset counter
  - Input counter reset

Colors to DIN EN 60947-5-2


- Core colors
- BK= black
  - BN= brown
  - BU= blue
  - WH= white

### Diagrams and graphs

Note on pressure loss



derating ambient temperature



- 1 Ambient temperature
- 2 Medium temperature