


SU8030

Ultrasonic flow meter

SUR11XFBFRKG/US

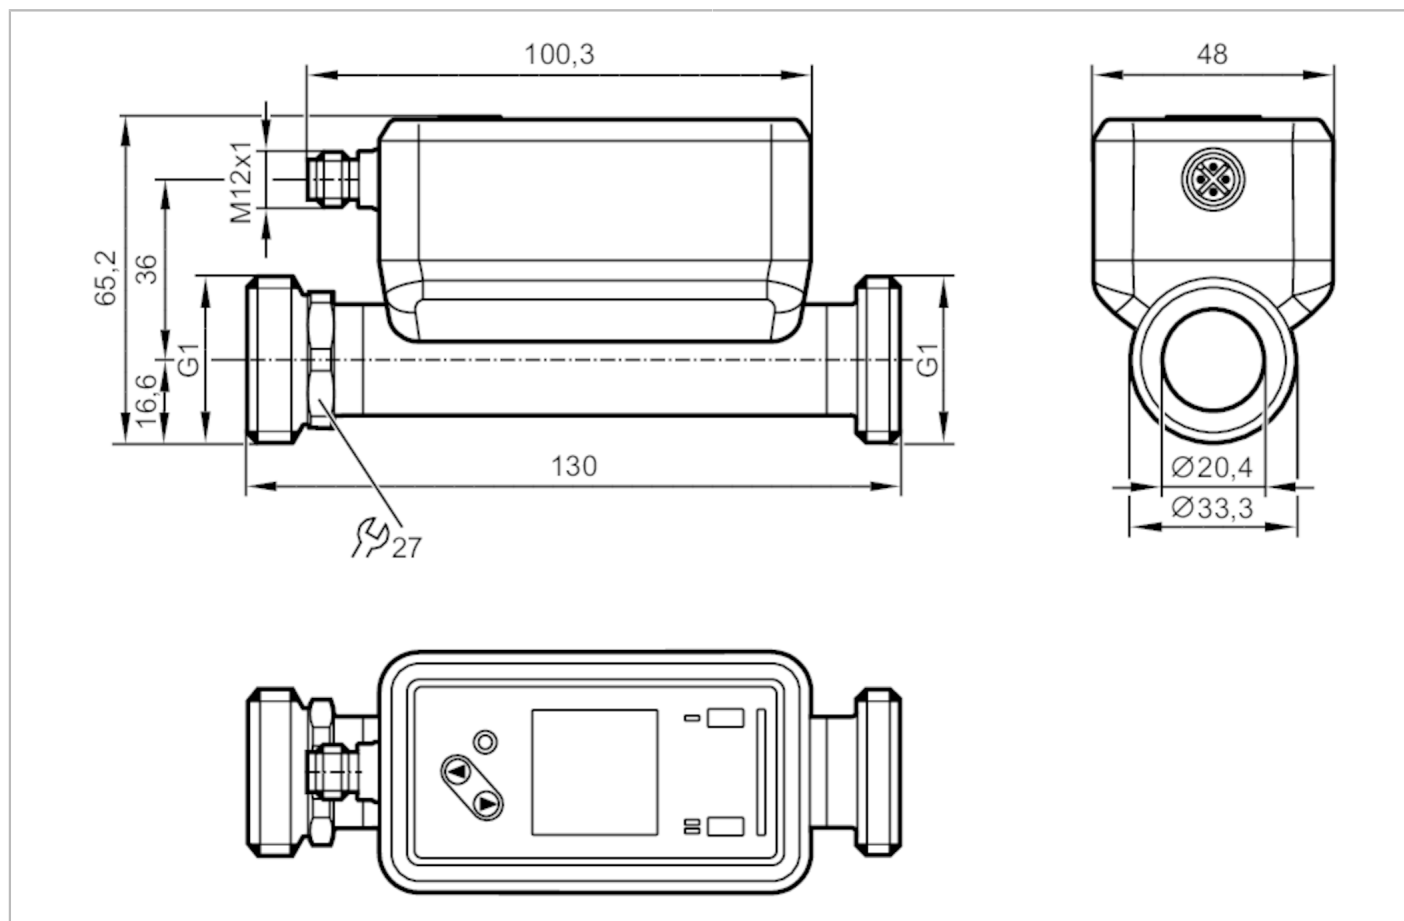

ACS KTW/W270 Reg31

Product characteristics				
Measuring range	1...240 l/min	60...14400 l/h	0.051...12.202 m/s	0.06...14.4 m³/h
Process connection	threaded connection G 1 external thread DN25			
Application				
System	gold-plated contacts			
Media	ultra-pure water; water; water-based media; glycol solutions; oils; Coolants			
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value			
	low-viscosity oils with viscosity: 7...40 mm²/s (40 °C)			
	high-viscosity oils with viscosity: 30...68 mm²/s (40 °C)			
Medium temperature	[°C]	-20...100		
Min. burst pressure	150 bar	15 MPa		
Pressure rating	100 bar	10 MPa		
Vacuum resistance	[mbar]	-1000		
Electrical data				
Operating voltage	[V]	18...32 DC; (to SELV/PELV)		
Current consumption	[mA]	< 75		
Protection class		III		
Reverse polarity protection		yes		
Power-on delay time	[s]	5		



Ultrasonic flow meter

SUR11XFBFRKG/US

Measuring principle	ultrasonic			
Inputs				
Inputs	counter reset			
Outputs				
Total number of outputs	2			
Output signal	switching signal; pulse signal; analog signal; IO-Link; frequency signal; diagnostic signal; totalizer switching signal			
Electrical design	PNP/NPN			
Output function	normally open / closed; (configurable)			
Max. voltage drop switching output DC [V]	2			
Permanent current rating of switching output DC [mA]	100			
Switching frequency DC [Hz]	0...10000			
Analog current output [mA]	4...20			
Max. load [Ω]	500			
Pulse output	flow rate meter			
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
Measuring/setting range				
Measuring range	1...240 l/min	60...14400 l/h	0.051...12.202 m/s	0.06...14.4 m³/h
Display range	-288...288 l/min	-17280...17280 l/h	-14.642...14.642 m/s	-17.28...17.28 m³/h
Resolution	0.1 l/min	1 l/h	0.001 m/s	0.002 m³/h
Set point SP	2.3...240 l/min	139...14400 l/h	0.118...12.202 m/s	0.139...14.4 m³/h
Reset point rP	1.1...238.8 l/min	64...14325 l/h	0.055...12.139 m/s	0.064...14.325 m³/h
Analog start point ASP	-240...192 l/min	-14400...11522 l/h	-12.202...9.763 m/s	-14.4...11.522 m³/h
Analog end point AEP	-192...240 l/min	-11522...14400 l/h	-9.763...12.202 m/s	-11.522...14.4 m³/h
Low flow cut-off LFC	1...12 l/min	60...720 l/h	0.051...0.61 m/s	0.06...0.72 m³/h
Frequency end point, FEP	48.1...240 l/min	2889...14400 l/h	2.448...12.202 m/s	2.89...14.4 m³/h
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.02...99990000 l			
Temperature monitoring				
Measuring range [°C]	-20...100			
Display range [°C]	-44...124			
Resolution [°C]	0.1			
Set point SP [°C]	-19.6...100			
Reset point rP [°C]	-20...99.6			
Analog start point [°C]	-20...76			
Analog end point [°C]	4...100			
Frequency start point, FSP [°C]	-20...76			
Frequency end point, FEP [°C]	4...100			

SU8030



Ultrasonic flow meter

SUR11XFBFRKG/US

Frequency at the end point FRP	[Hz]	1...10000
--------------------------------	------	-----------

Accuracy / deviations

Flow monitoring		
Accuracy (in the measuring range)	glycol solutions (35%)	$\pm(5,0 \% \text{ MW} + 0,5 \% \text{ MEW})$
	high-viscosity oils with viscosity 46mm ² /s (40°C)	$\pm(5,0 \% \text{ MW} + 0,5\% \text{ MEW})$
	low-viscosity oils with viscosity 10mm ² /s (40°C)	$\pm(5,0 \% \text{ MW} + 0,5\% \text{ MEW})$
	water	$\pm (1,0 \% \text{ MW} + 0,5 \% \text{ MEW})$
Repeatability		$\pm 0,2 \% \text{ MEW}$

Temperature monitoring		
Accuracy	[K]	$\pm 2,5 (Q > 5 \% \text{ MEW})$
Temperature coefficient [% of the span / 10 K]		0,2

Reaction times

Flow monitoring		
Response time	[s]	< 0.25; (dAP = 0, T09)
Damping process value dAP	[s]	0...5
Temperature monitoring		
Dynamic response T05 / T09	[s]	5,7 / 86

Software / programming

Diagnostic functions	direction of flow detection; signal quality
----------------------	---

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1.3	
SDCI standard	IEC 61131-9: 2013-07	
Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time	[ms]	9.6
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
	Type of operation	DeviceID
Supported DeviceIDs	default	1758

Operating conditions

Ambient temperature	[°C]	-20...60
---------------------	------	----------

SU8030



Ultrasonic flow meter

SUR11XFBFRKG/US

Storage temperature	[°C]	-25...80
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
MTTF	[years]	160
UL approval	UL approval number	I034
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	551.4
Housing		rectangular
Type of mounting		inlet pipe length 5xDN; outlet pipe length 1xDN
Dimensions	[mm]	130 x 48 x 65.2
Material		housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT
Materials (wetted parts)		Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket
Process connection		threaded connection G 1 external thread DN25
Surface characteristics Ra/Rz of the wetted parts		Ra < 1.25 µm

Displays / operating elements		
Display		Color display 1,44", 128 x 128 pixels
	Switching function	2 x LED, yellow
	diagnosis	1 x LED, three-color
Display unit		l/min; l/h; m³/h; m/s

Accessories		
Items supplied		Gasket 2, Centellen package insert

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
		pulse and totalizer signal are only available for one of the two outputs
		the accuracy indications are adhered to over the entire application area
Pack quantity		1 pcs.

Electrical connection		
-----------------------	--	--

Connector: 1 x M12; coding: A; Contacts: gold-plated



SU8030



Ultrasonic flow meter

SUR11XFBFRKG/US

Connection




- OUT1/IO-Link: Switching output Volumetric flow quantity monitoring
Switching output Temperature monitoring
Pulse output quantity meter
Frequency output Volumetric flow quantity monitoring
Frequency output Temperature monitoring
signal output Preset counter
- OUT2/InD: Switching output Volumetric flow quantity monitoring
Switching output Temperature monitoring
Pulse output quantity meter
analog output flow
analog output temperature
signal output Preset counter
Input counter reset

Colors to DIN EN 60947-5-2

- Core colors
- BK= black
 - BN= brown
 - BU= blue
 - WH= white

Diagrams and graphs

Note on pressure loss

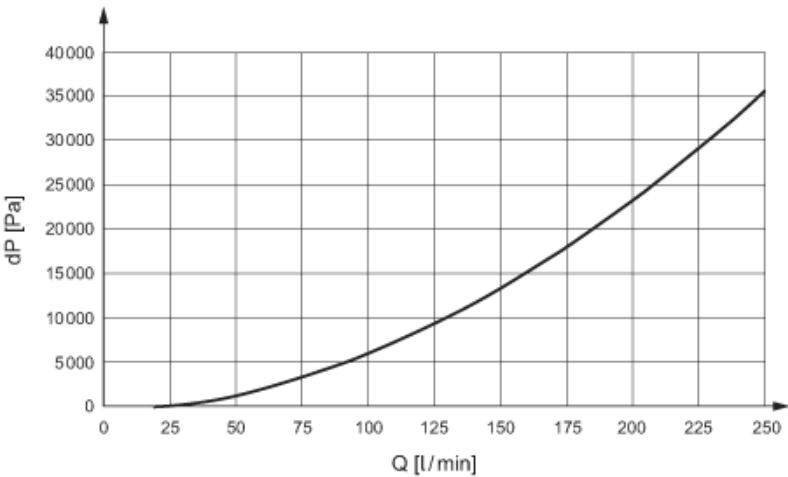


SU8030

Ultrasonic flow meter

SUR11XFBFRKG/US



derating ambient temperature



- 1 Ambient temperature
- 2 Medium temperature