


SUH601



Ultrasonic flow meter

SUC80XJBFRKG/US

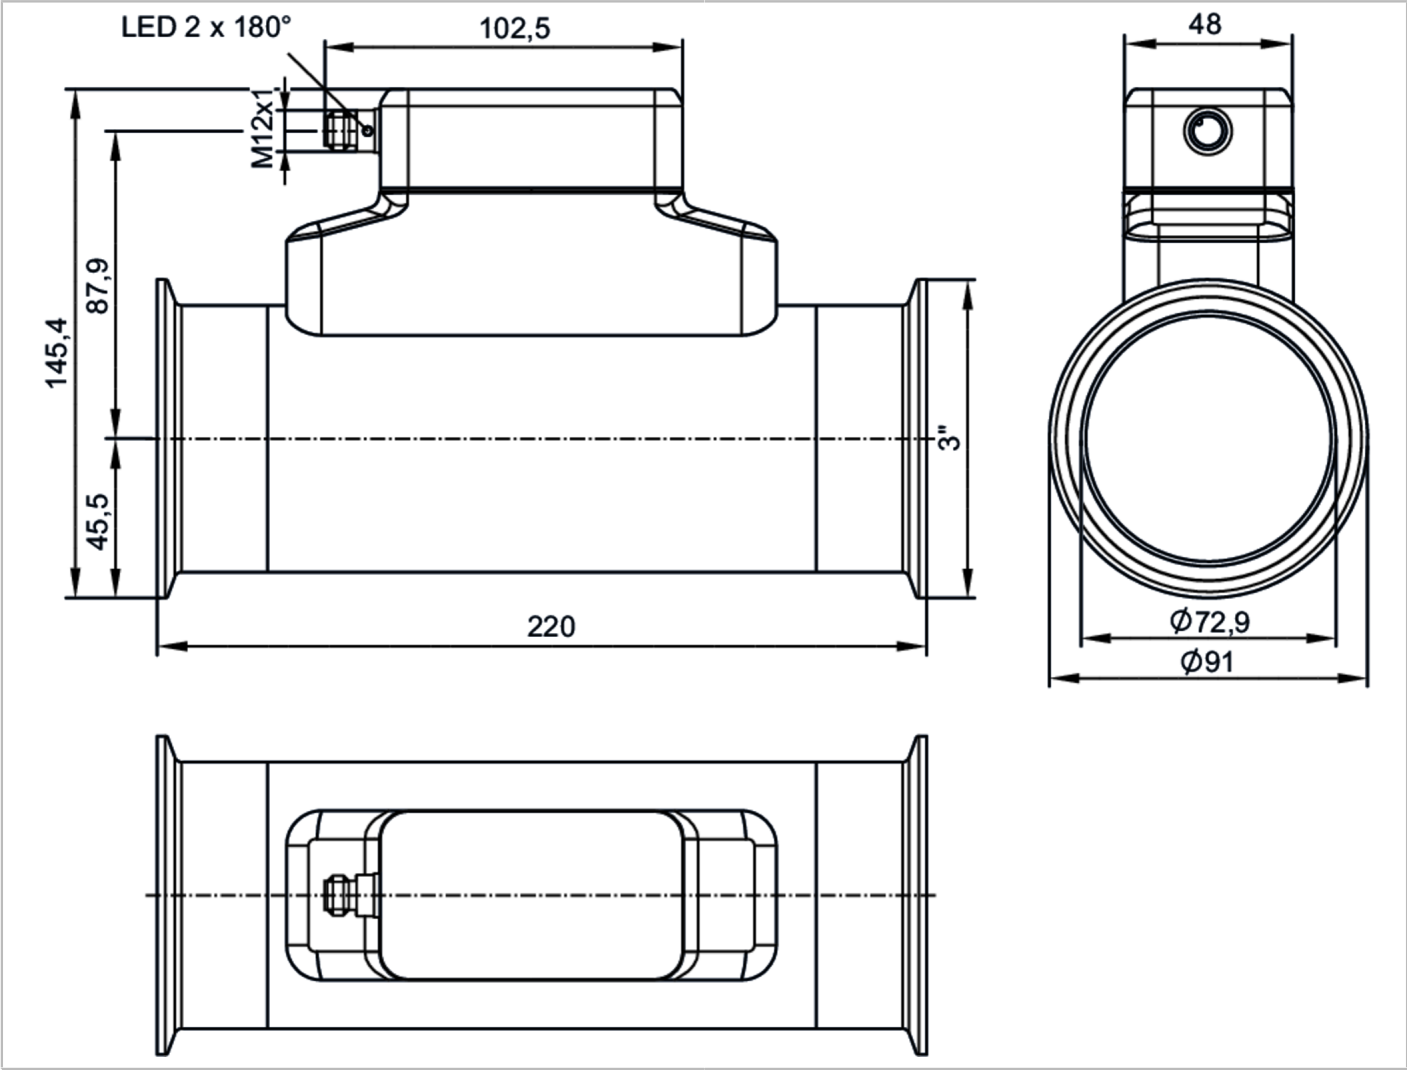

ACS



EC 1935/2004

FCM



IO-Link

KTW/W270

Reg31

Product characteristics

Measuring range	25...3600 l/min	1.5...216 m³/h	400...57061 gph	6.6...951 gpm
Nominal diameter	DN80 (3")			
Process connection	Clamp 3" DIN 32676 series C (ASME BPE)			

Application

System	gold-plated contacts	
Application	food and beverage industry	
Media	ultra-pure water; water; water-based media	
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value	
Medium temperature [°C]	-40...120; (< 1 h: 150)	
Min. burst pressure	40 bar	4 MPa
Pressure rating	25 bar	2.5 MPa
Note on pressure rating	take into account the pressure resistance of the bracket and the seal used for clamp connection	
Vacuum resistance [mbar]	-1000	

SUH601



Ultrasonic flow meter

SUC80XJBFRKG/US

Electrical data				
Operating voltage	[V]	18...32 DC; (to SELV/PELV)		
Current consumption	[mA]	< 75		
Protection class		III		
Reverse polarity protection		yes		
Power-on delay time	[s]	5		
Measuring principle		ultrasonic		
Inputs / outputs				
Total number of inputs and outputs		2		
Inputs				
Inputs		OUT2	counter reset	
Outputs				
Total number of outputs		2		
Output signal		OUT1	switching signal; pulse signal; diagnostic signal; totalizer switching signal; frequency signal; IO-Link	
		OUT2	switching signal; pulse signal; diagnostic signal; totalizer switching signal; analog signal	
Electrical design		PNP/NPN		
Pulse output		flow rate meter		
Short-circuit protection		yes		
Type of short-circuit protection		yes (non-latching)		
Overload protection		yes		
Analog				
Number of analog outputs		1		
Analog current output	[mA]	4...20		
Max. load	[Ω]	500		
Digital				
Number of digital outputs		2		
Output function		normally open / closed; (configurable)		
Max. voltage drop switching output DC	[V]	2		
Permanent current rating of switching output DC	[mA]	100		
Switching frequency DC	[Hz]	0...10000		
Measuring/setting range				
Measuring range		25...3600 l/min	1.5...216 m³/h	400...57061 gph 6.6...951 gpm
Resolution		0.1 l/min	0.001 m³/h	1 gph 0.01 gpm
Note on factory setting		gpm, °F		
Set point SP		44.8...3600 l/min	2.7...216 m³/h	710...57061 gph 11.8...951 gpm
Reset point rP		26.1...3581.3 l/min	1.6...214.9 m³/h	413...56764 gph 6.9...946.1 gpm
Analog start point ASP		-3600...2880 l/min	-216...172.8 m³/h	-57060...45650 gph -951...760.8 gpm
Analog end point AEP		-2880...3600 l/min	-172.8...216 m³/h	-45650...57060 gph -760.8...951 gpm
Low flow cut-off LFC		25...180 l/min	1.5...10.8 m³/h	400...2850 gph 6.6...47.6 gpm

SUH601



Ultrasonic flow meter

SUC80XJBFRKG/US

Frequency end point, FEP	722.2...3600 l/min	43.3...216 m³/h	11450...57060 gph	190.8...951 gpm
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.1...99990000 l; 0.026...26414563.515 gal			
Temperature monitoring				
Measuring range	-40...120 °C		-40...248 °F	
Resolution	0.1 °C		0.1 °F	
Set point SP	-39.4...120 °C		-39...248 °F	
Reset point rP	-40...119.4 °C		-40...247 °F	
Analog start point	-40...88 °C		-40...190.4 °F	
Analog end point	-8...120 °C		17.6...248 °F	
Frequency start point, FSP	-40...88 °C		-40...190.4 °F	
Frequency end point, FEP	-8...120 °C		17.6...248 °F	
Frequency at the end point FRP [Hz]	1...10000			
Accuracy / deviations				
Accuracy (in the measuring range)	only up to 100 °C; at higher temperatures, only the repeatability is within the specification.			
Flow monitoring				
Accuracy (in the measuring range)	water		± (2,0 % MW + 0,5 % MEW)	
Repeatability	± 0,2 % MEW			
Temperature monitoring				
Accuracy [K]	± 2,5 (Q > 5 % MEW)			
Temperature coefficient [% of the span / 10 K]	0,2			
Reaction times				
Flow monitoring				
Response time [s]	< 0.5; (dAP = 0, T09)			
Damping process value dAP [s]	0...5			
Temperature monitoring				
Dynamic response T05 / T09 [s]	5,7 / 86			
Software / programming				
Diagnostic functions	direction of flow detection; signal quality			
Interfaces				
Communication interface	IO-Link			
Transmission type	COM2 (38,4 kBaud)			
IO-Link revision	1.1.3			
SDCI standard	IEC 61131-9: 2013-07			
Profiles	BLOB		Binary Large Object transfer	
	Common - I&D		Identification and Diagnosis	
Required master port class	A			
Process data analog	3			
Process data binary	2			

SUH601



Ultrasonic flow meter

SUC80XJBFRKG/US

Min. process cycle time	[ms]	9.6
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
Supported DeviceIDs	Type of operation	DeviceID
	default	1855

Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Protection		IP 69; (DIN EN 60529)

Tests / approvals		
EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
MTTF	[years]	136
UL approval	UL approval number	I038
	File number UL	E174189
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	1863.8
Housing		rectangular
Inlet pipe length		15 x DN
Outlet pipe length		3 x DN
Dimensions	[mm]	220 x 91 x 145.4
Material		housing: stainless steel (1.4404 / 316L); connector: PEI, FKM
Materials (wetted parts)		Pipe section: stainless steel (1.4435 / 316L); Process connection: stainless steel (1.4404 / 316L)
Nominal diameter		DN80 (3")
Process connection		Clamp 3" DIN 32676 series C (ASME BPE)
Process connection suitable for pipe standard		3" / Ø 76,2 mm x 1,65 mm; (DIN 11866 series C); (DIN EN 10357 Series D)
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm (16 µin); Rz = 4 µm (157 µin)

Displays / operating elements		
Display	operating status	1 x LED, green

Accessories	
Items supplied	package insert

Remarks	
Remarks	MW = Measured value
	MEW = Final value of the measuring range
	pulse and totalizer signal are only available for one of the two outputs
	the specified surface characteristics Ra/Rz of the wetted surfaces do not apply to the weld seam.

SUH601



Ultrasonic flow meter


SUC80XJBFRKG/US

Pack quantity


1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

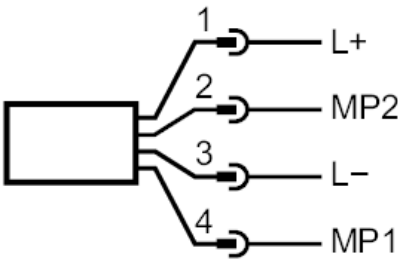

1 (L+)	L+	
2 (OUT2)	MP2	DO2, AO, DI
3 (L-)	L-	
4 (OUT1)	MP1	DO1, FO, IO-Link

AO: analog output; DI: digital input; DO: digital output; FO: Frequency output; MP: multi-function connection


SUH601

Ultrasonic flow meter

SUC80XJBFRKG/US



Diagrams and graphs

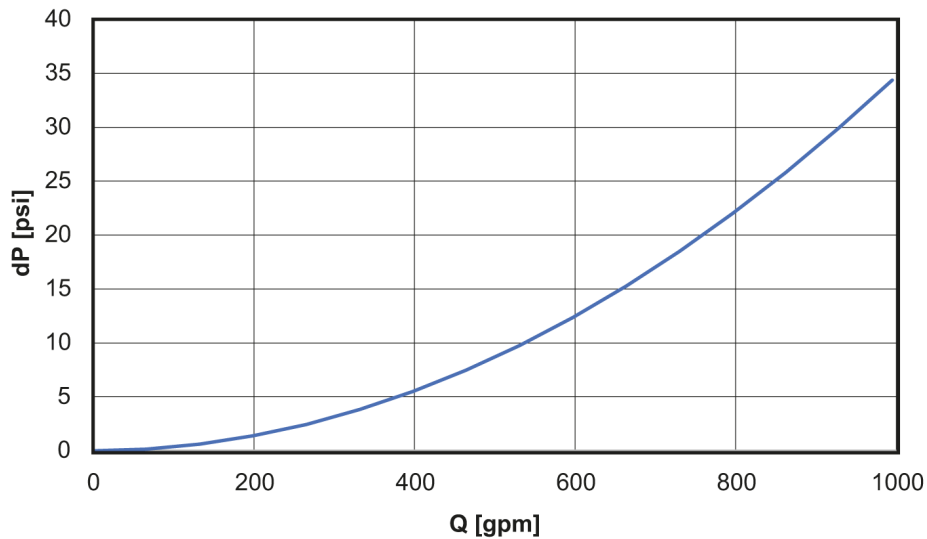

dP Pressure loss
[psi]
Q volumetric flow quantity
[gpm]