


SUH620

Ultrasonic flow meter

SUC80XJBFRKG/US

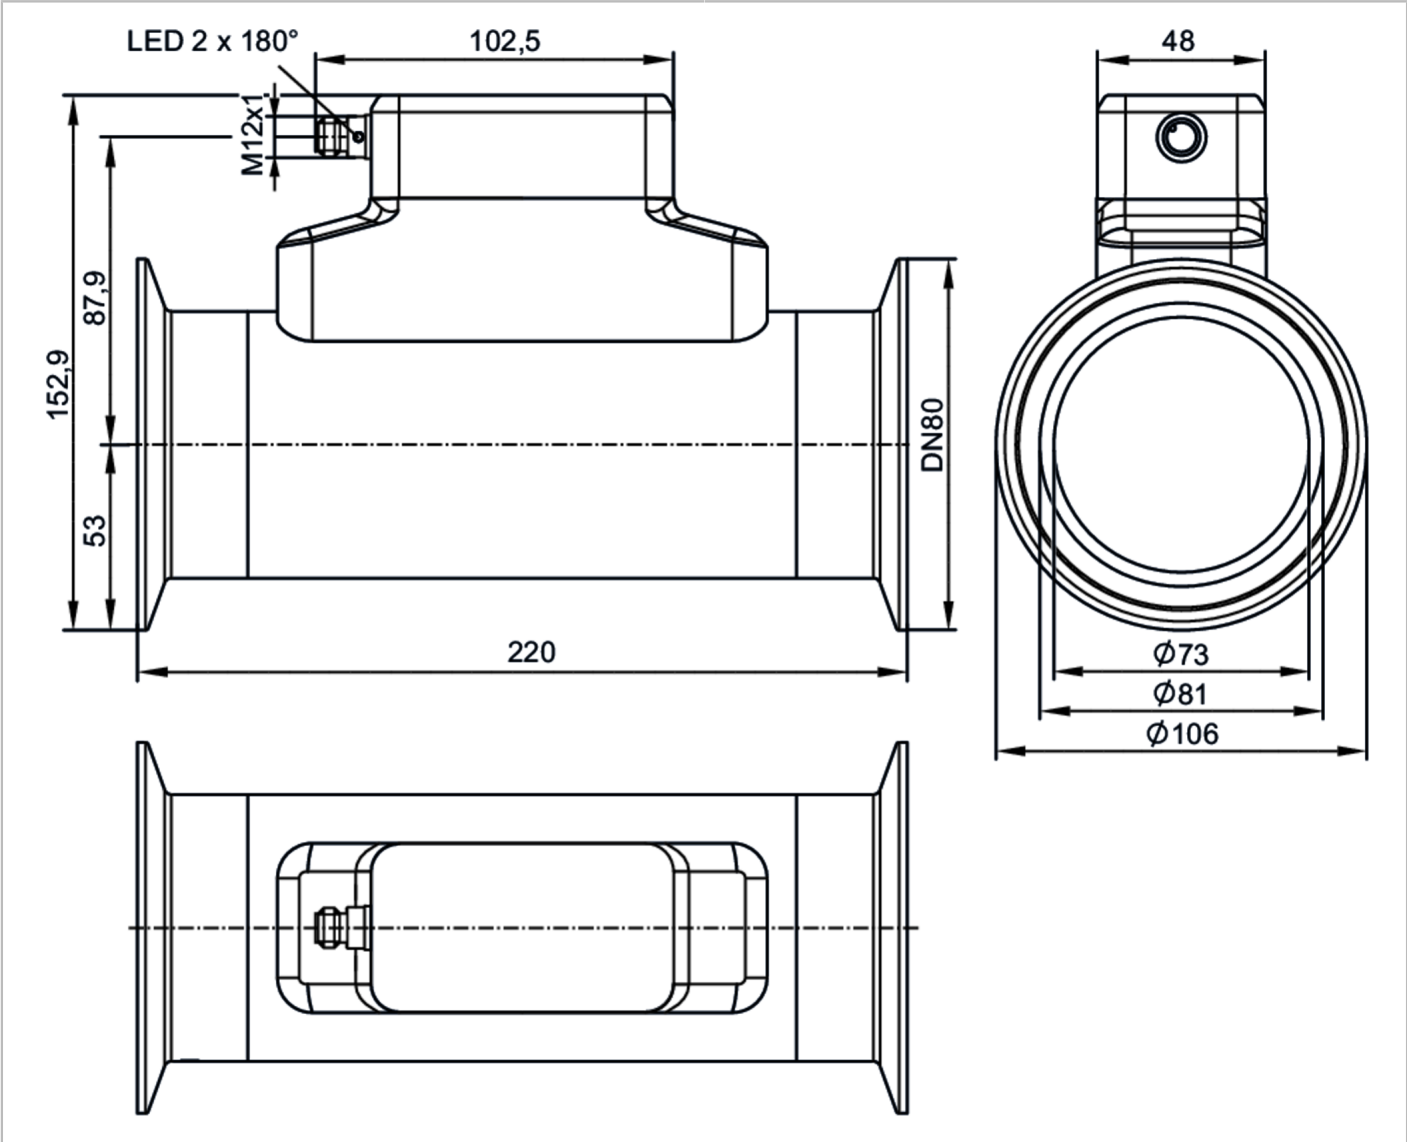

Product characteristics				
Measuring range	25...3600 l/min	1.5...216 m³/h	400...57061 gph	6.6...951 gpm
Nominal diameter	DN80 (3")			
Process connection	Clamp DN80 DIN 32676 series A			
Application				
System	gold-plated contacts			
Application	food and beverage industry			
Media	ultra-pure water; water; water-based media			
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value			
Medium temperature [°C]	-40...120; (< 1 h: 150)			
Min. burst pressure	40 bar		4 MPa	
Pressure rating	25 bar		2.5 MPa	
Note on pressure rating	take into account the pressure resistance of the bracket and the seal used for clamp connection			

SUH620



Ultrasonic flow meter

SUC80XJBFRKG/US

Vacuum resistance	[mbar]	-1000
-------------------	--------	-------

Electrical data		
Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 75
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5
Measuring principle		ultrasonic

Inputs / outputs		
Total number of inputs and outputs		2

Inputs		
Inputs	OUT2	counter reset

Outputs		
Total number of outputs		2
Output signal	OUT1	switching signal; pulse signal; diagnostic signal; totalizer switching signal; frequency signal; IO-Link
	OUT2	switching signal; pulse signal; diagnostic signal; totalizer switching signal; analog signal
Electrical design		PNP/NPN
Pulse output		flow rate meter
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Analog		
Number of analog outputs		1
Analog current output	[mA]	4...20
Max. load	[Ω]	500

Digital		
Number of digital outputs		2
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	0...10000

Measuring/setting range				
Measuring range	25...3600 l/min	1.5...216 m³/h	400...57061 gph	6.6...951 gpm
Resolution	0.1 l/min	0.001 m³/h	1 gph	0.01 gpm
Note on factory setting	l/min, °C			
Set point SP	44.8...3600 l/min	2.7...216 m³/h	710...57061 gph	11.8...951 gpm
Reset point rP	26.1...3581.3 l/min	1.6...214.9 m³/h	413...56764 gph	6.9...946.1 gpm
Analog start point ASP	-3600...2880 l/min	-216...172.8 m³/h	-57060...45650 gph	-951...760.8 gpm
Analog end point AEP	-2880...3600 l/min	-172.8...216 m³/h	-45650...57060 gph	-760.8...951 gpm

SUH620



Ultrasonic flow meter

SUC80XJBFRKG/US

Low flow cut-off LFC	25...180 l/min	1.5...10.8 m³/h	400...2850 gph	6.6...47.6 gpm
Frequency end point, FEP	722.2...3600 l/min	43.3...216 m³/h	11450...57060 gph	190.8...951 gpm
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.1...99990000 l; 0.026...26414563.515 gal			
Temperature monitoring				
Measuring range	-40...120 °C		-40...248 °F	
Resolution	0.1 °C		0.1 °F	
Set point SP	-39.4...120 °C		-39...248 °F	
Reset point rP	-40...119.4 °C		-40...247 °F	
Analog start point	-40...88 °C		-40...190.4 °F	
Analog end point	-8...120 °C		17.6...248 °F	
Frequency start point, FSP	-40...88 °C		-40...190.4 °F	
Frequency end point, FEP	-8...120 °C		17.6...248 °F	
Frequency at the end point FRP [Hz]	1...10000			
Accuracy / deviations				
Accuracy (in the measuring range)	only up to 100 °C; at higher temperatures, only the repeatability is within the specification.			
Flow monitoring				
Accuracy (in the measuring range)	water		± (2,0 % MW + 0,5 % MEW)	
Repeatability	± 0,2 % MEW			
Temperature monitoring				
Accuracy [K]	± 2,5 (Q > 5 % MEW)			
Temperature coefficient [% of the span / 10 K]	0,2			
Reaction times				
Flow monitoring				
Response time [s]	< 0.5; (dAP = 0, T09)			
Damping process value dAP [s]	0...5			
Temperature monitoring				
Dynamic response T05 / T09 [s]	5,7 / 86			
Software / programming				
Diagnostic functions	direction of flow detection; signal quality			
Interfaces				
Communication interface	IO-Link			
Transmission type	COM2 (38,4 kBaud)			
IO-Link revision	1.1.3			
SDCI standard	IEC 61131-9: 2013-07			
Profiles	BLOB		Binary Large Object transfer	
	Common - I&D		Identification and Diagnosis	
Required master port class	A			
Process data analog	3			

SUH620



Ultrasonic flow meter

SUC80XJBFRKG/US

Process data binary	2	
Min. process cycle time [ms]	9.6	
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
Supported DeviceIDs	Type of operation	DeviceID
	default	1856

Operating conditions		
Ambient temperature [°C]		-20...60
Storage temperature [°C]		-25...80
Protection		IP 69; (DIN EN 60529)

Tests / approvals		
EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
MTTF [years]		136
UL approval	UL approval number	I038
	File number UL	E174189
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		1975.15
Housing		rectangular
Inlet pipe length		15 x DN
Outlet pipe length		3 x DN
Dimensions [mm]		220 x 106 x 152.9
Material	housing: stainless steel (1.4404 / 316L); connector: PEI, FKM	
Materials (wetted parts)	Pipe section: stainless steel (1.4435 / 316L); Process connection: stainless steel (1.4404 / 316L)	
Nominal diameter		DN80 (3")
Process connection		Clamp DN80 DIN 32676 series A
Process connection suitable for pipe standard	DN80 / Ø 85 mm x 2 mm; (DIN 11866 series A); (DIN EN 10357 series A)	
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm (16 µin); Rz = 4 µm (157 µin)	

Displays / operating elements		
Display	operating status	1 x LED, green

Accessories		
Items supplied	package insert	

SUH620



Ultrasonic flow meter

SUC80XJBFRKG/US


Remarks	
Remarks	MW = Measured value
	MEW = Final value of the measuring range
	pulse and totalizer signal are only available for one of the two outputs
	the specified surface characteristics Ra/Rz of the wetted surfaces do not apply to the weld seam.
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

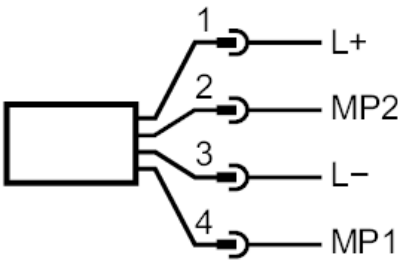

1 (L+)	L+	
2 (OUT2)	MP2	DO2, AO, DI
3 (L-)	L-	
4 (OUT1)	MP1	DO1, FO, IO-Link
AO: analog output; DI: digital input; DO: digital output; FO: Frequency output; MP: multi-function connection		


SUH620

Ultrasonic flow meter

SUC80XJBFRKG/US



Diagrams and graphs

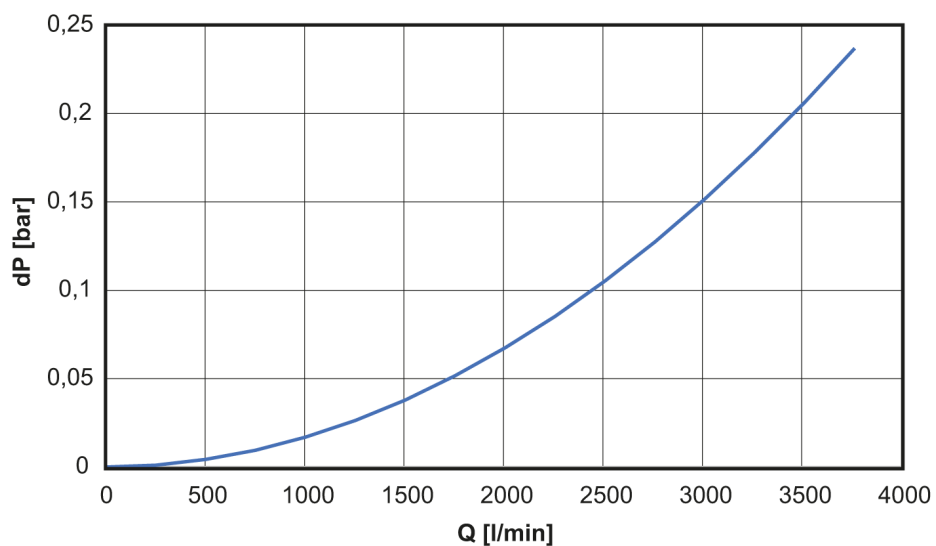

dP [bar] Pressure loss
Q [l/min] volumetric flow quantity