


SV7151



Vortex flow meter

SVR11XGXD0KG/US

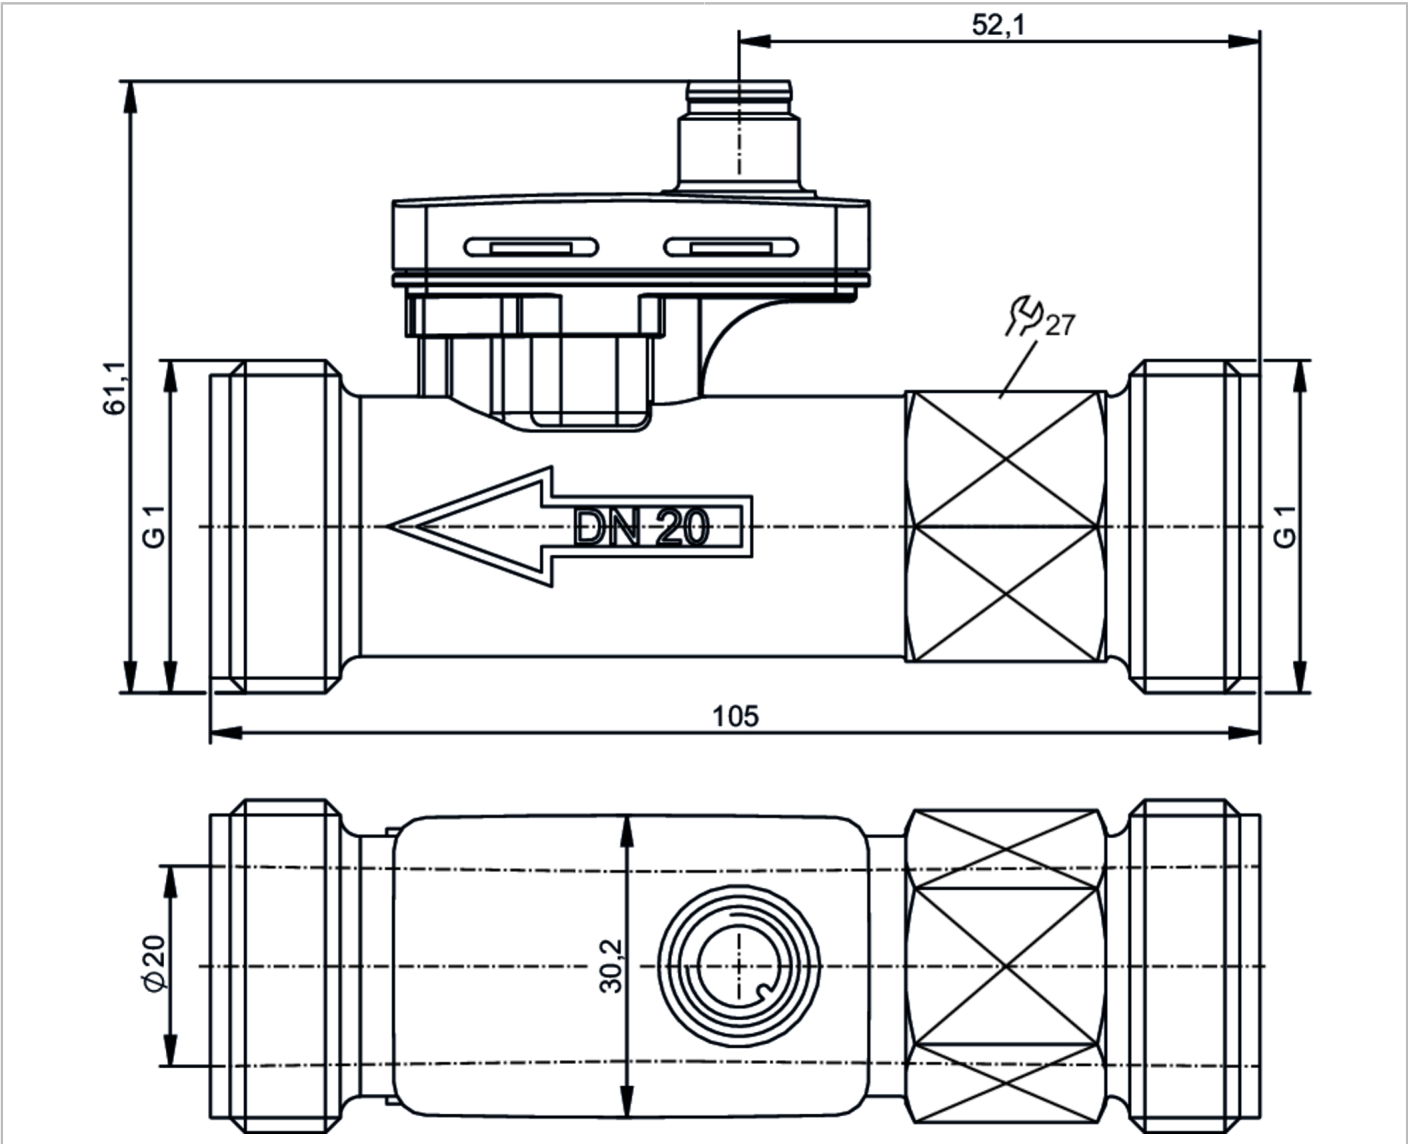

Product characteristics		
Number of inputs and outputs	Number of analog outputs: 1	
Measuring range	5...85 l/min	0.265...4.509 m/s
Process connection	threaded connection G 1 external thread DN20	
Application		
System	gold-plated contacts	
Measuring element	1 x Pt 1000; (to DIN EN 60751, class B)	
Application	for industrial applications	
Installation	connection to pipe by means of an adapter	
Media	ultra-pure water; water; glycol solutions; Coolants	
Medium temperature [°C]	-15...125	
Min. burst pressure	25 bar	2.5 MPa
Note on min. burst pressure	125 °C	
Pressure rating	16 bar	1.6 MPa

SV7151



Vortex flow meter

SVR11XGXD0KG/US

Note on pressure rating	≤ 90 °C	
Electrical data		
Operating voltage [V]	8...33 DC	
Current consumption [mA]	< 5	
Min. insulation resistance [MΩ]	100; (500 V DC)	
Protection class	III	
Power-on delay time [s]	< 2	
Measuring principle	Vortex	
Inputs / outputs		
Number of inputs and outputs	Number of analog outputs: 1	
Outputs		
Total number of outputs	1	
Output signal	analog signal	
Number of analog outputs	1	
Analog current output [mA]	4...20	
Max. load [Ω]	< (U _b - 8 V) / 20 mA; U _b = 24 V: 800	
Measuring/setting range		
Measuring range	5...85 l/min	0.265...4.509 m/s
Temperature monitoring		
Internal heating temperature probe	1 K/mW	
Measuring range [°C]	-15...125	
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	water	Q < 50 % MEW: < 1 % MEW / Q > 50 % MEW: < 2 % MEW
	glycol solutions (35%)	2 > ν < 6 cSt: ± 5% MEW / 6 > ν < 15 cSt: ± 10% MEW
Repeatability	0,2; (% of the final value)	
Temperature monitoring		
Accuracy [K]	± 0,3 ± 0,005 x T	
Reaction times		
Flow monitoring		
Response time [s]	0.37; (T09)	
Temperature monitoring		
Dynamic response T05 / T09 [s]	< 10 / < 30	
Operating conditions		
Ambient temperature [°C]	-15...85	
Note on ambient temperature	Medium temperature > 0 °C: -40...85	
Storage temperature [°C]	-40...85	
Protection	IP 65	
Cavitation	P(absolute) discharge / P(difference) > 5.5 to avoid cavitation	
Tests / approvals		
EMC	EN IEC 61326-1:2021	

SV7151



Vortex flow meter

SVR11XGXD0KG/US

Shock resistance	DIN EN 60068-2-27	30 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	with water / 10...61 Hz 1 mm
		with water / 61...2000 Hz 2 g
MTTF [years]		395.9
UL approval	File number UL	E364788
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		114.5
Housing		rectangular
Dimensions [mm]		105 x 30.2 x 61.1
Material	Housing: PPS 40% glass fiber; electronics: PC 10% glass fiber	
Materials (wetted parts)	sensor: PPSU; Pipe section: PPS 40% glass fiber; sealing: EPDM	
Tightening torque [Nm]		12
Process connection	threaded connection G 1 external thread DN20	

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated




SV7151



Vortex flow meter

SVR11XGXD0KG/US

Connection

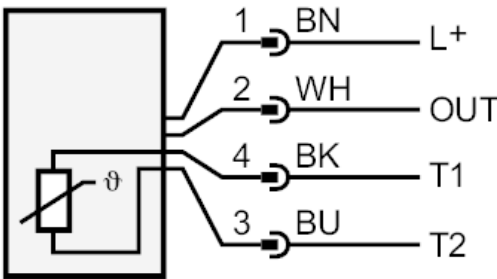

OUT: analog output
T1 / T2: Pt1000
Colors to DIN EN 60947-5-2
Core colors :
BK = black
BN = brown
BU = blue
WH = white

Other data

determination using the compensation value and the response threshold for glycol-water mixtures

determination of the compensation value Q0	[l/min]	$5.313 \times (I - 4\text{mA}) - 0.75v + 0,75$
determination of the response threshold Qmin	[l/min]	$4.0 + v$
v = kinematische Viskosität		




Vortex flow meter

SVR11XGXD0KG/US


Diagrams and graphs

Pressure rating

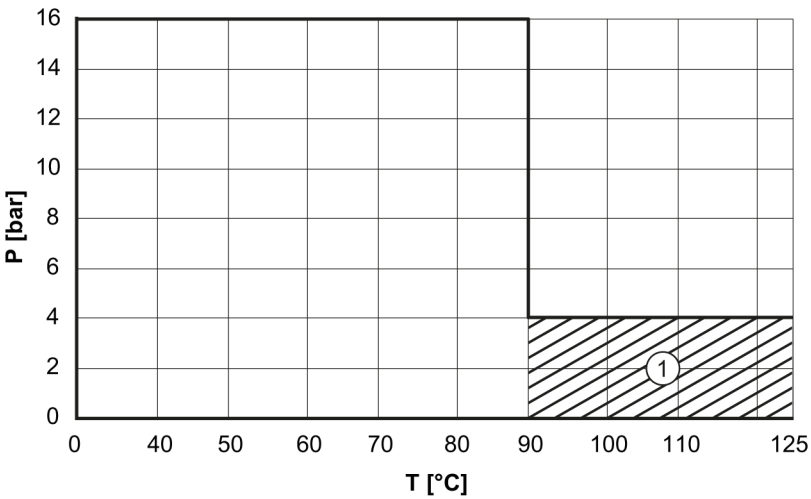

P [bar] = pressure
T [°C] = temperature
1 = permanent

Pressure loss

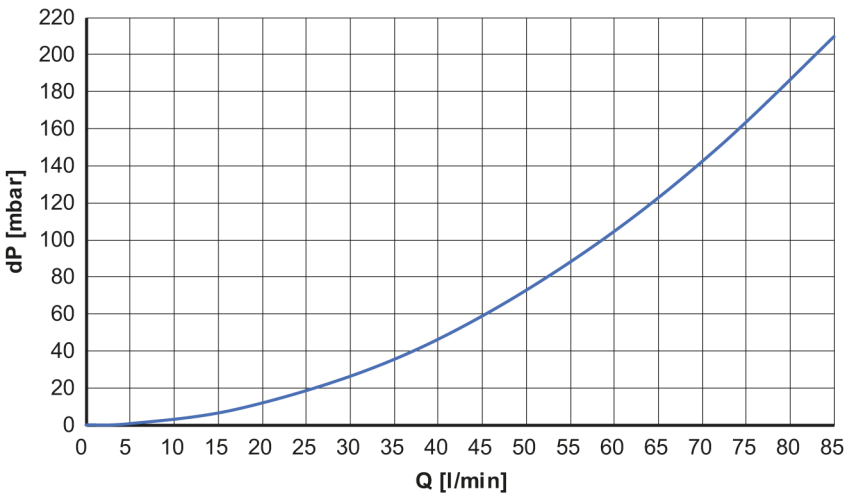

dP [mbar] = Pressure loss
Q [l/min] = volumetric flow quantity