


SV8151



Vortex flow meter

SVR54XGXD0KG/US

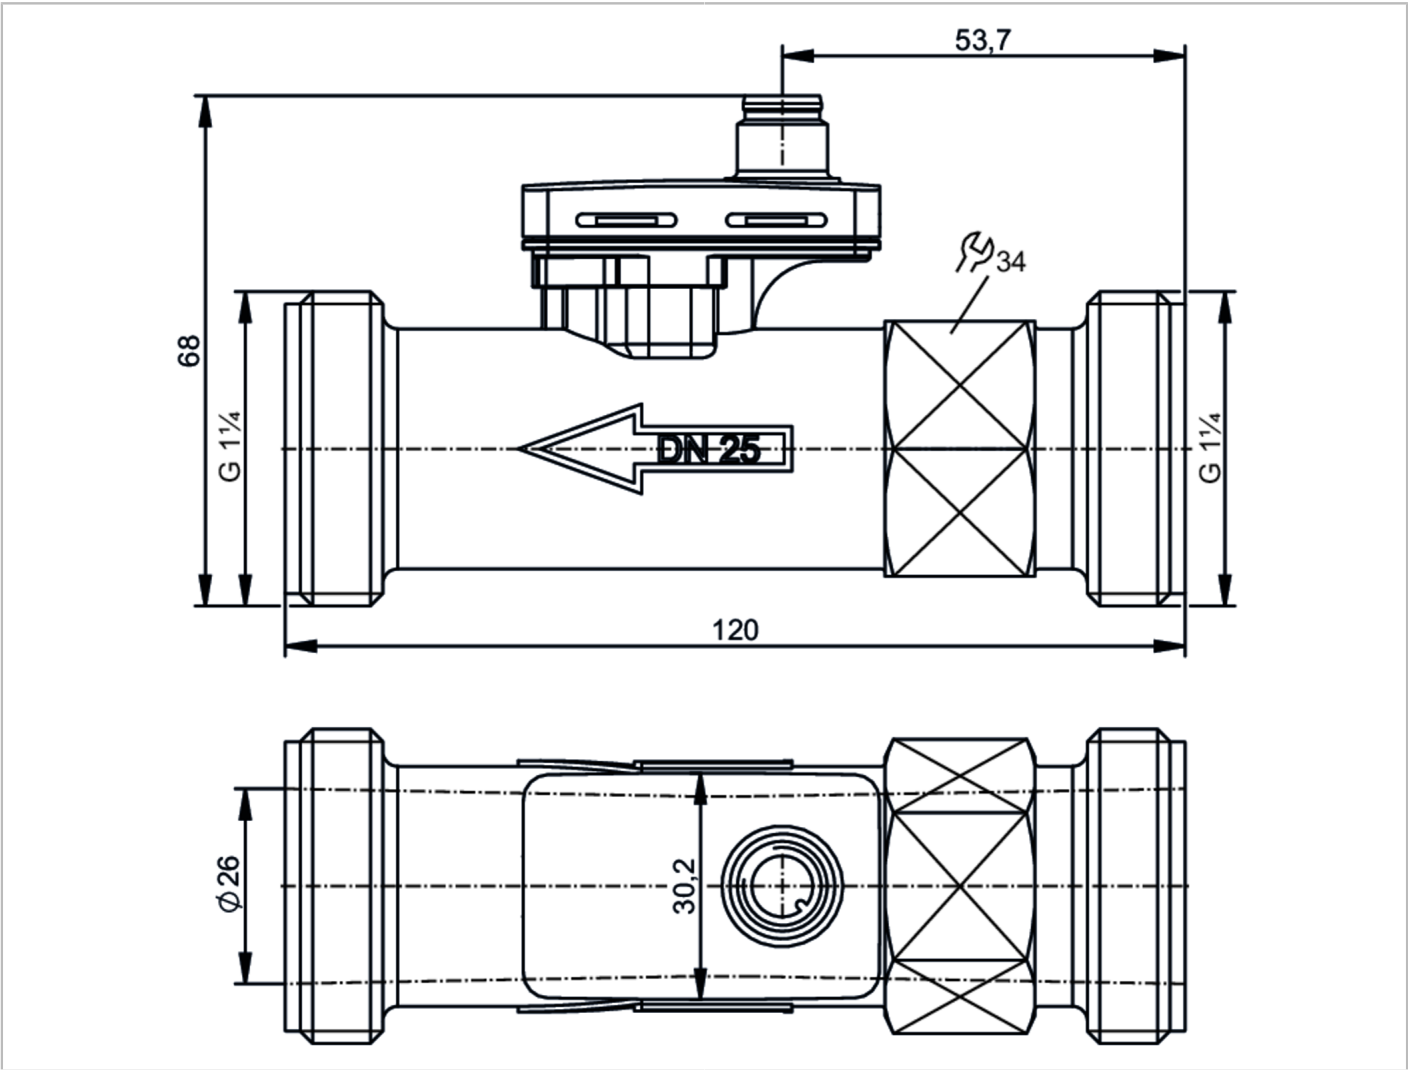

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1	
Measuring range	9...150 l/min	0.283...4.709 m/s
Process connection	threaded connection G 1 1/4 external thread DN25	

Application

System	gold-plated contacts	
Measuring element	1 x Pt 1000; (to DIN EN 60751, class B)	
Application	for industrial applications	
Installation	connection to pipe by means of an adapter	
Media	ultra-pure water; water; glycol solutions; Coolants	
Medium temperature [°C]	-15...125	
Min. burst pressure	10 bar	1 MPa
Note on min. burst pressure	125 °C	
Pressure rating	16 bar	1.6 MPa
Note on pressure rating	≤ 90 °C	

SV8151



Vortex flow meter

SVR54XGXD0KG/US

Electrical data		
Operating voltage	[V]	8...33 DC
Current consumption	[mA]	< 5
Min. insulation resistance	[MΩ]	100; (500 V DC)
Protection class		III
Power-on delay time	[s]	< 2
Measuring principle		Vortex
Inputs / outputs		
Number of inputs and outputs	Number of analog outputs: 1	
Outputs		
Total number of outputs	1	
Output signal	analog signal	
Number of analog outputs	1	
Analog current output	[mA]	4...20
Max. load	[Ω]	< (Ub - 8 V) / 20 mA; Ub = 24 V: 800
Measuring/setting range		
Measuring range	9...150 l/min	0.283...4.709 m/s
Temperature monitoring		
Internal heating temperature probe	1 K/mW	
Measuring range	[°C]	-15...125
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	water	
Accuracy (in the measuring range)	water	Q < 50 % MEW: < 1 % MEW / Q > 50 % MEW: < 2 % MW
	glycol solutions (35%)	2 > ν < 6 cSt: ± 5% MEW / 6 > ν < 15 cSt: ± 10% MEW
Repeatability	0,2; (% of the final value)	
Temperature monitoring		
Accuracy	[K]	± 0,3 ± 0,005 x T
Reaction times		
Flow monitoring		
Response time	[s]	0.38; (T09)
Temperature monitoring		
Dynamic response T05 / T09	[s]	< 10 / < 30
Operating conditions		
Ambient temperature	[°C]	-15...85
Note on ambient temperature	Medium temperature > 0 °C: -40...85	
Storage temperature	[°C]	-40...85
Protection	IP 65	
Cavitation	P(absolute) discharge / P(difference) > 5.5 to avoid cavitation	

SV8151



Vortex flow meter

SVR54XGXD0KG/US

Tests / approvals		
EMC	EN IEC 61326-1:2021	
Shock resistance	DIN EN 60068-2-27	30 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	with water / 10...61 Hz 1 mm
		with water / 61...2000 Hz 2 g
MTTF	[years]	395.9
UL approval	File number UL	E364788
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	147.8
Housing		rectangular
Dimensions	[mm]	120 x 41.91 x 68
Material		Housing: PPS 40% glass fiber; electronics: PC 10% glass fiber
Materials (wetted parts)		sensor: PPSU; Pipe section: PPS 40% glass fiber; sealing: EPDM
Tightening torque	[Nm]	15
Process connection		threaded connection G 1 1/4 external thread DN25

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated




SV8151



Vortex flow meter

SVR54XGXD0KG/US

Connection

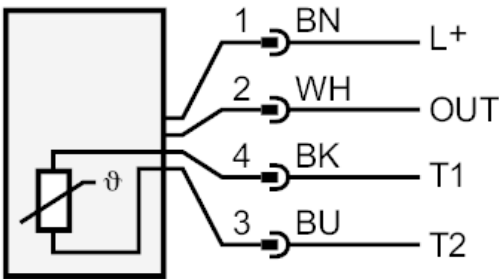

OUT: analog output
T1 / T2: Pt1000
Colors to DIN EN 60947-5-2
Core colors :
BK = black
BN = brown
BU = blue
WH = white

Other data

determination using the compensation value and the response threshold for glycol-water mixtures

determination of the compensation value Q0	[l/min]	$9.375 \times (I - 4mA) - 1.0v + 1.0$
determination of the response threshold Qmin	[l/min]	$8.0 + v$
v =	kinematische Viskosität	




Vortex flow meter

SVR54XGXD0KG/US


Diagrams and graphs

Pressure rating

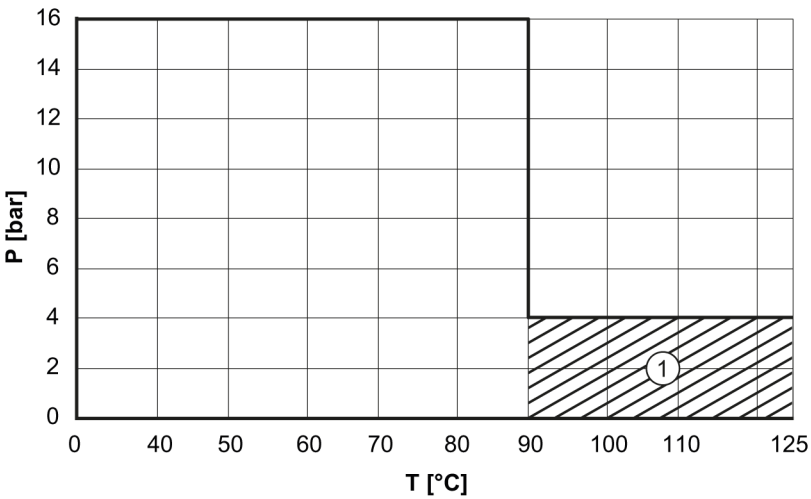

P [bar] = pressure
T [°C] = temperature
1 = permanent

Pressure loss

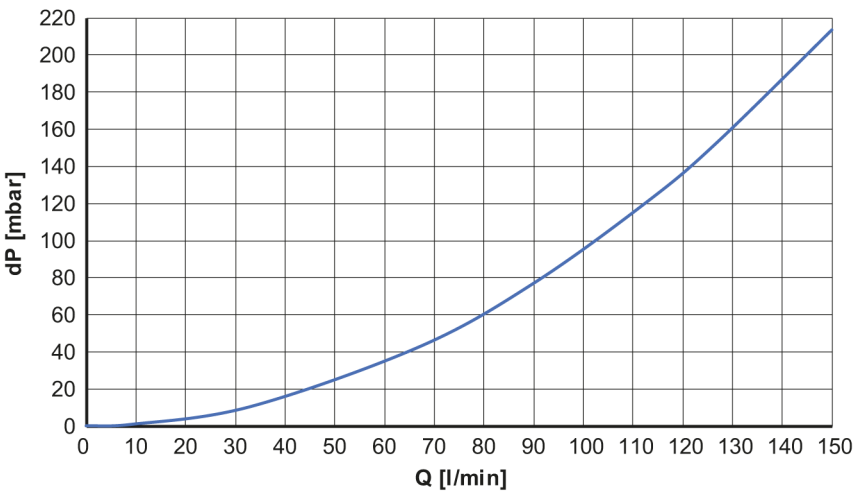

dP [mbar] = Pressure loss
Q [l/min] = volumetric flow quantity