

TCC511



Temperature transmitter

TCC050K1ER12-A-DKG/US

| | |
|--|---|
| Protection class | III |
| Reverse polarity protection | yes |
| Power-on delay time [s] | 6 |
| Integrated watchdog | yes |
| Inputs / outputs | |
| Number of inputs and outputs | Number of digital outputs: 1; Number of analog outputs: 1 |
| Outputs | |
| Total number of outputs | 2 |
| Output signal | analog signal; IO-Link; (calibration check status) |
| Electrical design | PNP/NPN |
| Number of digital outputs | 1 |
| Output function | normally closed; (diagnostic signal) |
| Max. voltage drop switching output DC [V] | 2 |
| Permanent current rating of switching output DC [mA] | 100 |
| Diagnostic output | calibration check status and error diagnostics |
| Number of analog outputs | 1 |
| Analog current output [mA] | 4...20 |
| Max. load [Ω] | $(U_b - 15 \text{ V}) \times 50$ |
| Short-circuit protection | yes |
| Type of short-circuit protection | yes (non-latching) |
| Overload protection | yes |
| Measuring/setting range | |
| Probe length L [mm] | 50 |
| Measuring range | -25...160 °C -13...320 °F |
| Note on measuring range | scalable |
| Factory setting | -10...150 °C / 14...302 °F |
| Calibration check limit [K] | 0.5...3 |
| In steps of [K] | 0.05 |
| Resolution | |
| Resolution of analog output [K] | 0.05 |
| Accuracy / deviations | |
| Precision analog output [K] | $\pm 0,2$ |
| Precision IO-Link [K] | $\pm 0,2$ |
| Temperature coefficient analog output [% of the span / 10 K] | $< \pm 0,02$; (In case of deviation from the reference condition $25 \pm 5 \text{ °C}$) |
| Temperature coefficient IO-Link [% of the span / 10 K] | $< \pm 0,01$; (In case of deviation from the reference condition $25 \pm 5 \text{ °C}$) |
| Reaction times | |
| Dynamic response T05 / T09 [s] | 1,5 / 4 |



Temperature transmitter

TCC050K1ER12-A-DKG/US

| Software / programming | | |
|---|---|---------------------------------------|
| Parameter setting options | Display unit; scaling of the analog output; calibration check limit; switching logic diagnostic output; simulation mode | |
| Interfaces | | |
| Communication interface | IO-Link | |
| Transmission type | COM2 (38,4 kBaud) | |
| IO-Link revision | 1.1 | |
| SDCI standard | IEC 61131-9 CDV | |
| Profiles | BLOB | Binary Large Object transfer |
| | Common - I&D | Identification and Diagnosis |
| | Function | Measurement data, standard resolution |
| SIO mode | yes | |
| Required master port class | A | |
| Process data analog | 1 | |
| Process data binary | 1 | |
| Min. process cycle time [ms] | 4.4 | |
| IO-Link resolution temperature [K] | 0.01 | |
| Supported DeviceIDs | Type of operation | DeviceID |
| | default | 1129 |
| Operating conditions | | |
| Ambient temperature [°C] | -25...70 | |
| Note on ambient temperature | max. internal device temperature: 125 °C | |
| Storage temperature [°C] | -40...100 | |
| Protection | IP 68; IP 69K | |
| Tests / approvals | | |
| EMC | DIN EN 61000-6-2 | |
| | DIN EN 61000-6-3 | |
| Shock resistance | DIN EN 68000-2-27 | 50 g (11 ms) |
| Vibration resistance | DIN EN 60068-2-6 | 35 g (10...2000 Hz) |
| MTTF [years] | 329 | |
| Note on approval | Factory certificate available as download at www.factory-certificate.ifm | |
| UL approval | UL approval number | K021 |
| | File number UL | E217884 |
| Mechanical data | | |
| Weight [g] | 367.7 | |
| Housing | tubular | |
| Dimensions [mm] | Ø 50 / L = 144 | |
| Material | stainless steel (1.4404 / 316L); PEI; FKM; PFA | |
| Materials (wetted parts) | stainless steel (1.4404 / 316L); PEEK | |
| Tightening torque [Nm] | 30...50 | |
| Process connection | threaded connection G 1/2 external thread sealing cone | |
| Surface characteristics Ra/Rz of the wetted parts | Ra < 0.8 µm | |
| Probe diameter [mm] | 6 | |
| Installation length EL [mm] | 50 | |

TCC511



Temperature transmitter

TCC050K1ER12-A-DKG/US


| Remarks | |
|---------------|--|
| Remarks | MS = set measuring span cULus - Class 2 source required |
| Pack quantity | 1 pcs. |

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

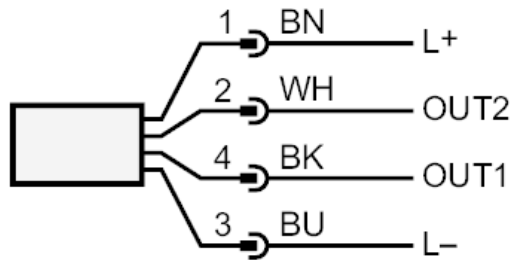

OUT2: analog output
OUT1: Diagnostic output / IO-Link