


TM4531



Temperature sensor with process connection

TM-100KFER12-

/US/

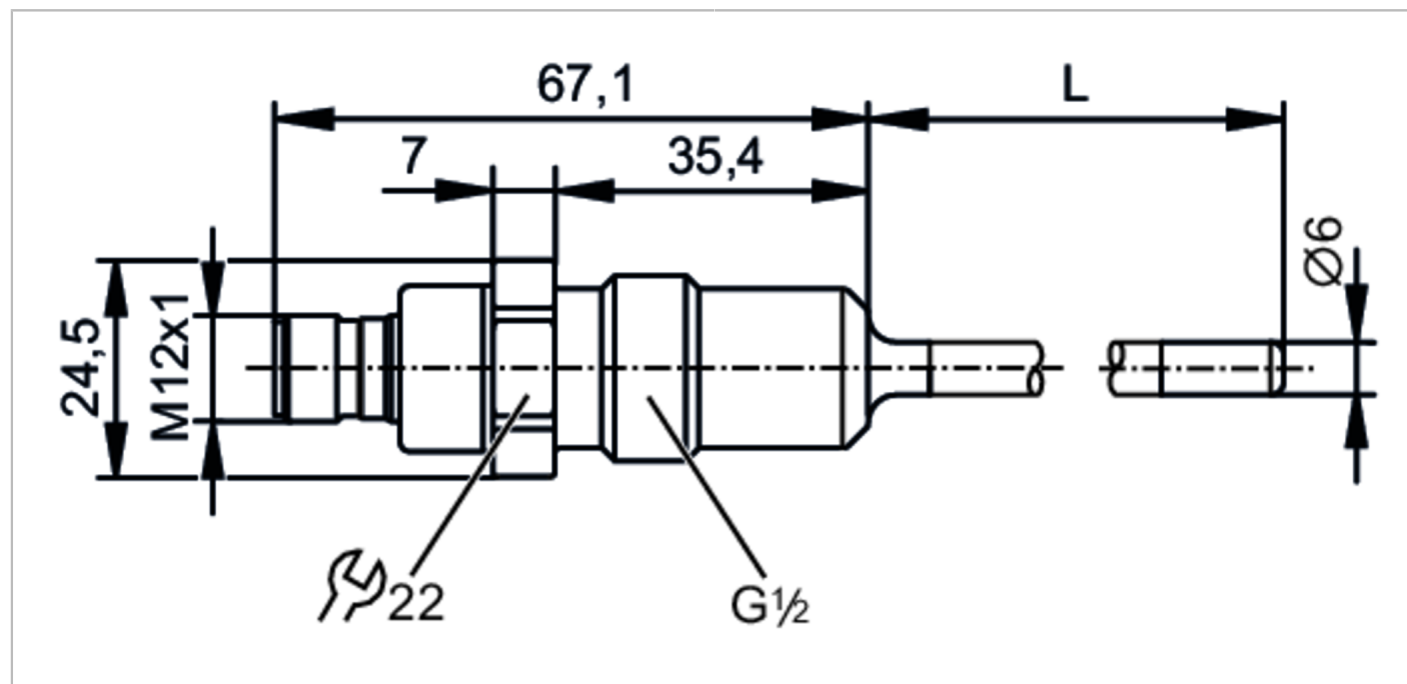

Product characteristics		
Measuring range	-40...150 °C	-40...302 °F
Process connection	threaded connection G 1/2 external thread sealing cone	
Installation length EL	[mm]	100
Application		
System	gold-plated contacts	
Measuring element	1 x Pt 100; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating	160 bar	16 MPa
Note on pressure rating	sensor	
	When mounted in adapters the specifications of the adapter data sheet apply.	
Minimum installation depth	[mm]	15
Electrical data		
Protection class	III	
Measuring/setting range		
Probe length L	[mm]	100
Measuring range	-40...150 °C	-40...302 °F
Accuracy / deviations		
Accuracy	[K]	± (0,15 K + 0,002 x t)
Reaction times		
Dynamic response T05 / T09	[s]	1 / 3; (according to DIN EN 60751)
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 68; IP 69K	

TM4531



Temperature sensor with process connection

TM-100KFER12- /US/

Tests / approvals		
Shock resistance	DIN EN 60068-2-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF	[years]	22831.05
Mechanical data		
Weight	[g]	142
Housing		tubular
Dimensions	[mm]	Ø 24.5 / L = 161.6
Material		stainless steel (1.4404 / 316L)
Materials (wetted parts)		stainless steel (1.4404 / 316L) electropolished
Tightening torque	[Nm]	30...50
Process connection		threaded connection G 1/2 external thread sealing cone
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.8 µm
Probe diameter	[mm]	6
Installation length EL	[mm]	100
Remarks		
Remarks		cULus - Class 2 source required
		The values for accuracy apply to flowing water.
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		
		
Connection		
