




Evaluation unit with display for PT100/PT1000 temperature sensors

TR-000KDBM12-QFPKG/US/

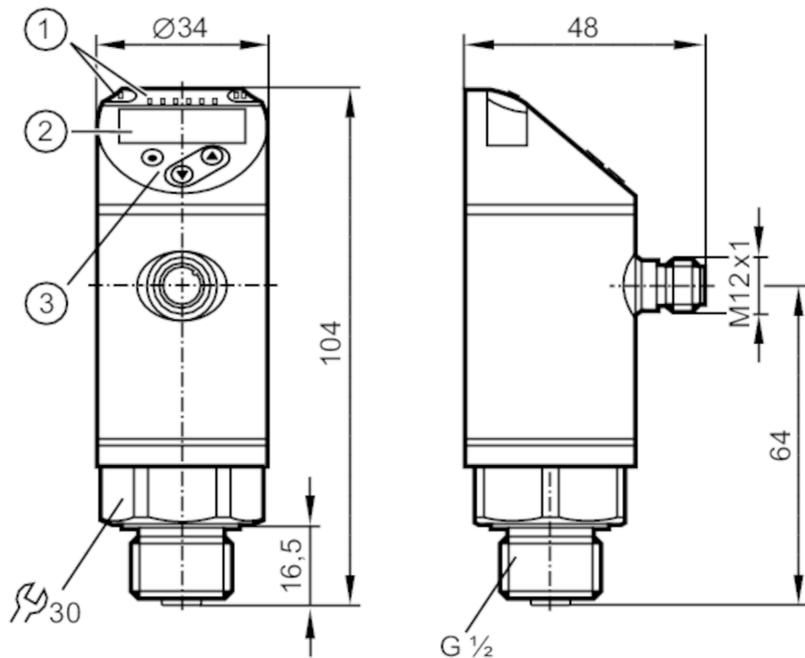

- 1 LEDs Display unit / Switching status
- 2 alphanumeric display 4-digit red/green
- 3 Programming buttons



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2	
Measuring range	-100...600 °C	-148...1112 °F
Communication interface	IO-Link	
Process connection	threaded connection G 1/2 external thread	

Application

System	gold-plated contacts
Application	for Pt100 and Pt1000 measuring elements

Electrical data

Operating voltage	[V]	18...32 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 50
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	1
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2
------------------------------	------------------------------

Outputs

Total number of outputs	2
Output signal	switching signal; IO-Link; (configurable)
Electrical design	PNP/NPN



Evaluation unit with display for PT100/PT1000 temperature sensors

TR-000KDBM12-QFPKG/US/

Number of digital outputs	2	
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	250	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Measuring/setting range		
Measuring range	-100...600 °C	-148...1112 °F
Set point SP	-99.8...600 °C	-147.6...1112 °F
Reset point rP	-100...599.8 °C	-148...1111.6 °F
In steps of	0.1 °C	0.1 °F
Resolution		
Resolution of switching output [K]	0.1	
Resolution of display [K]	0.1	
Accuracy / deviations		
Switch point accuracy [K]	± 0,3 + (± 0,1 % MS)	
Display accuracy [K]	± 0,3 + (± 0,1 % MS)	
Temperature coefficient [% of the span / 10 K]	0,1; (In case of deviation from the reference condition 25 ± 5 °C)	
Reaction times		
Response time [ms]	390	
Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; switching logic; switch-on/switch-off delay; Damping; Display unit	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
Min. process cycle time [ms]	2.3	
Supported DeviceIDs	Type of operation	DeviceID
	default	585
Operating conditions		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-40...100	
Protection	IP 67	

TR7439



Evaluation unit with display for PT100/PT1000 temperature sensors

TR-000KDBM12-QFPKG/US/

Tests / approvals		
EMC	DIN EN 61000-6-3	
	DIN EN 61000-6-2	
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	252
UL approval	UL approval number	K012

Mechanical data		
Weight	[g]	198.5
Housing		tubular
Dimensions	[mm]	Ø 34 / L = 104
Material		stainless steel (1.4404 / 316L); stainless steel (1.4301 / 304); PBT+PC-GF30; PBT-GF20; PC
Process connection		threaded connection G 1/2 external thread

Displays / operating elements		
Display	Display unit	2 x LED, green
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, red/green 4-digit


Remarks		
Remarks		MS = set measuring span
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

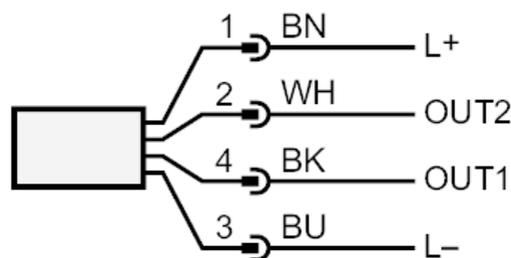

OUT1: Switching output / IO-Link
 OUT2: Switching output
 Colors to DIN EN 60947-5-2