


TS2239



Temperature cable sensor with bolt-on sensor

TS-200-KL /US

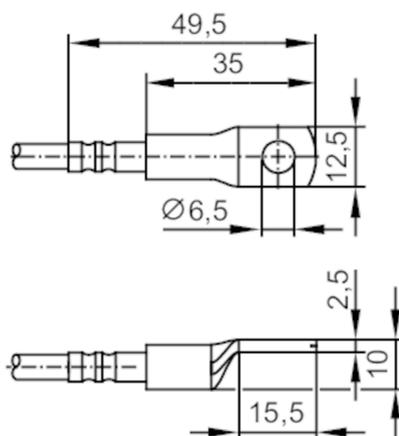

| Product characteristics | | |
|--------------------------------|---|--------------|
| Measuring range | -40...90 °C | -40...194 °F |
| Process connection | 12,5 x 8,7 x 49,5 mm | |
| Application | | |
| Measuring element | 1 x Pt 100; (to DIN EN 60751, class A) | |
| Installation | Contact sensor for solid bodies | |
| Electrical data | | |
| Insulation rating [M] | 500 | |
| Protection class | III | |
| Measuring/setting range | | |
| Measuring range | -40...90 °C | -40...194 °F |
| Accuracy / deviations | | |
| Accuracy [K] | ± (0,15 K + 0,002 x t) | |
| Reaction times | | |
| Dynamic response T05 / T09 [s] | 12 / 39; (Values for a flat aluminium surface (anodized) using a conductive heat paste.; reference values for moving water : 10 / 24 (< 0,1 m/s)) | |
| Operating conditions | | |
| Protection | IP 67 | |
| Tests / approvals | | |
| MTTF [years] | 12683.9 | |
| Mechanical data | | |
| Weight [g] | 101.4 | |
| Housing | rectangular | |
| Design | bolt-on sensor | |
| Dimensions [mm] | 12.5 x 8.7 x 49.5 | |
| Material | Sleeve: stainless steel (1.4571/316Ti); crimps: copper nickel-plated | |
| Process connection | 12,5 x 8,7 x 49,5 mm | |

TS2239



Temperature cable sensor with bolt-on sensor

TS-200-KL /US


Remarks

| | |
|---------------|--|
| Remarks | applications according to UL S"supply class 2" |
| Pack quantity | 1 pcs. |

Electrical connection

Cable: 2 m, PUR, Ø 4.9 mm; with wire end ferrules; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connection

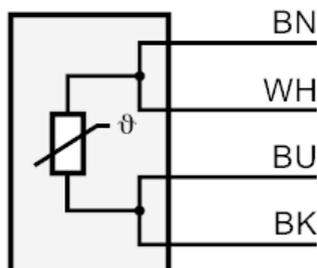

| | |
|------|---------------|
| | Core colors : |
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |