


UIT302



Full-metal ultrasonic sensor

UID02500E2KG/IO-Link/US

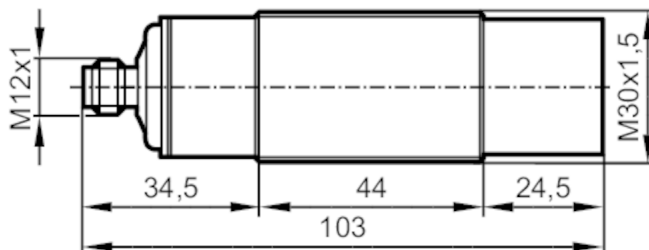

Product characteristics

Electrical design	PNP/NPN; (configurable)
Output function	normally open / closed; (configurable)
Sensing range [mm]	250...2500; (Target: 400 x 400 mm)
Communication interface	IO-Link
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 103

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 0.5
Converter frequency [kHz]	112

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1
------------------------------	---

Outputs

Total number of outputs	2
Electrical design	PNP/NPN; (configurable)
Number of digital outputs	1
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.2
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	1
Number of analog outputs	1
Analog voltage output [V]	0...10
Min. load resistance [Ω]	3000
Short-circuit protection	yes



Full-metal ultrasonic sensor

UID02500E2KG/IO-Link/US

Overload protection	yes	
Monitoring range		
Sensing range	[mm]	250...2500; (Target: 400 x 400 mm)
Blind zone	[mm]	250
Angle of aperture cylindrical	[°]	12; (±2)
Max. deviation from the 90° angle sensor/object	[°]	± 4
Accuracy / deviations		
Temperature compensation	yes	
Hysteresis	[%]	< 3
Linearity error of analog output	[%]	<3
Temperature drift	± 5 %; (of the final value of the measuring range)	
Repeatability	1 %	
Resolution	[mm]	3
Notes on the accuracy / deviation	The indicated values are reached after a warm-up time of min. 20 minutes	
Reaction times		
Response time	[s]	analog output
Response time	[ms]	< 600
Software / programming		
Parameter setting options	hysteresis / window; second switch point; Switch-on and switch-off delay; switch-on operations; Teach function; light-on/dark-on mode	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 3.1	Measuring Sensor
	Common - I&D	Identification and Diagnosis
	Function	Multiple switching signal
	Function	Teach channel
SIO mode	yes	
Required master port class	A	
Min. process cycle time	[ms]	3.2
IO-Link process data (cyclical)	Function	bit length
	process value	16
	device status	4
	binary switching information	2
IO-Link functions (acyclical)	application specific tag; operating hours counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	1390
Note	For further information please see the IODD PDF file at "Downloads"	
Operating conditions		
Ambient temperature	[°C]	-10...60
Storage temperature	[°C]	-15...65

UIT302



Full-metal ultrasonic sensor

UID02500E2KG/IO-Link/US

Protection	IP 65; IP 67; IP 68; IP 69K
------------	-----------------------------

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class A
Vibration resistance	EN 60068-2-6 Fc	(10-55) Hz 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz
Shock resistance	EN 60068-2-27 Ea	30 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
MTTF [years]		108

Mechanical data

Weight [g]	259.6
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 103
Thread designation	M30 x 1.5
Material	stainless steel (1.4404 / 316L); LED window: TPU (urethane); potting: PUR
Tightening torque [Nm]	100

Displays / operating elements

Display	Switching status	1 LED, yellow
---------	------------------	---------------

Accessories

Items supplied	lock nuts: 2 x M30, stainless steel
	damping plates: 2, EPDM

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection - plug

Connector: 1 x M12; coding: A






Connection

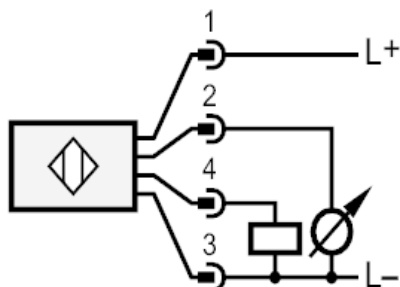


4 IO-Link

Diagrams and graphs

Standard sound cone

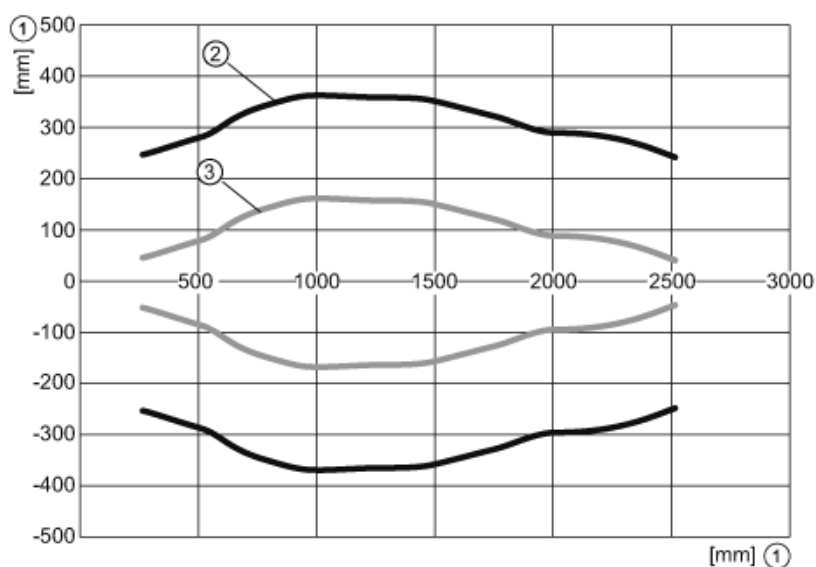


Medium sound cone

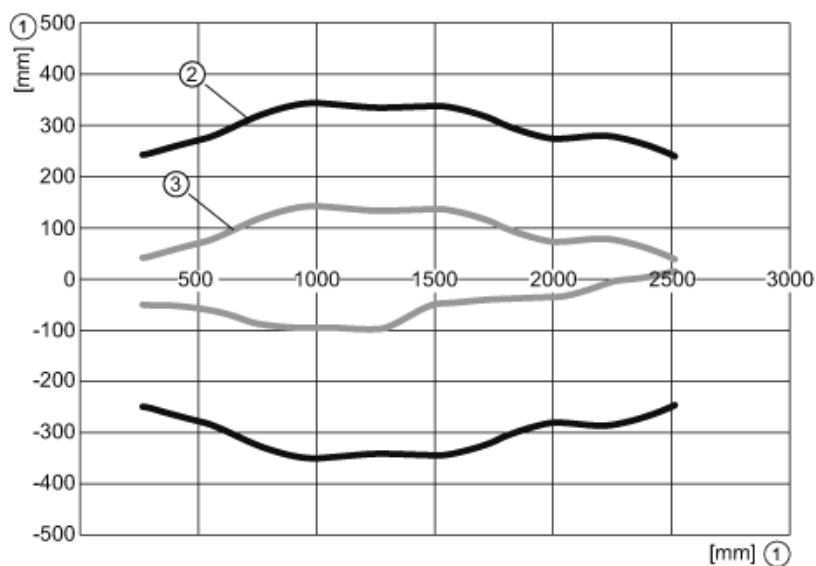


Full-metal ultrasonic sensor

UID02500E2KG/IO-Link/US

Narrow sound cone

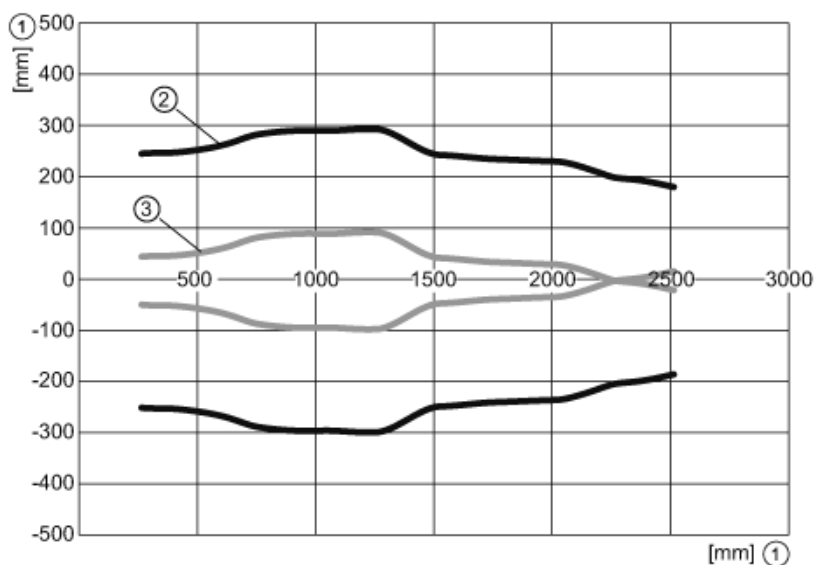

Function

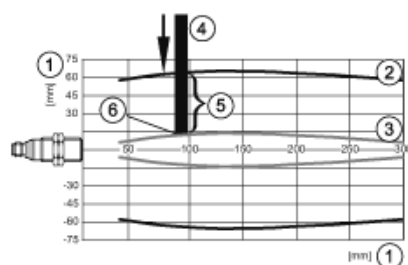

- 1: Distance
- 2: Monitoring range
- 3: switch-on/switch-off graph
- 4: Target 400 x 400 mm
- 5: 50 % of the target in the detection zone
- 6: Set point