


UIT504



Ultrasonic sensor

UIA06000E1KG/IO-Link/US

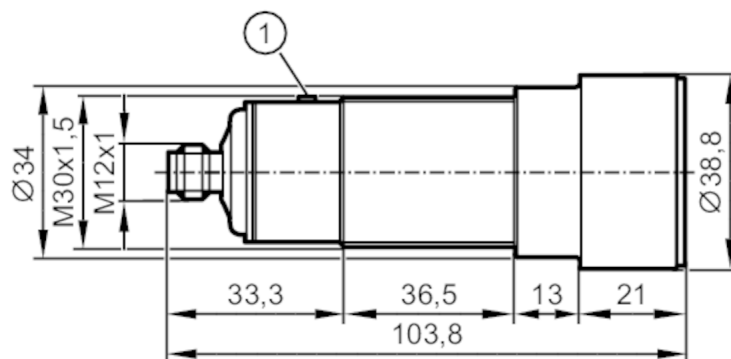

1 teach button



IO-Link



Product characteristics

Electrical design	PNP
Output function	normally open / closed; (configurable)
Sensing range [mm]	350...6000; (Target: 400 x 400 mm)
Communication interface	IO-Link
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 103.8

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 30
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 0.3
Converter frequency [kHz]	75

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1
------------------------------	---

Outputs

Total number of outputs	2
Output signal	switching signal; analog signal; IO-Link
Electrical design	PNP
Number of digital outputs	1
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.2
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	1
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500



Ultrasonic sensor

UIA06000E1KG/IO-Link/US

Short-circuit protection	yes
Overload protection	yes
Monitoring range	
Sensing range [mm]	350...6000; (Target: 400 x 400 mm)
Blind zone [mm]	350
Angle of aperture cylindrical [°]	15; (±2)
Max. deviation from the 90° angle sensor/object [°]	± 4
Accuracy / deviations	
Temperature compensation	yes
Hysteresis [%]	< 3
Switch-point drift [%]	-5...5
Linearity error of analog output [%]	<3
Repeatability	1 %
Resolution [mm]	3
Notes on the accuracy / deviation	The indicated values are reached after a warm-up time of min. 20 minutes
Reaction times	
Response time [ms]	< 600; (analog output)
Software / programming	
Parameter setting options	hysteresis / window; second switch point; Switch-on and switch-off delay; switch-on operations; Teach function; light-on/dark-on mode
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
Profiles	Smart Sensor - SSP 0
	Generic Profiled Sensor
	Function
	Device identification
	Function
	Multiple switching signal
SIO mode	Function
	Process data variable
	Function
	Device diagnosis
	Function
	Teach channel
Required master port class	A
Min. process cycle time [ms]	3.2
IO-Link process data (cyclical)	Function
	bit length
	process value
	16
IO-Link functions (acyclical)	device status
	4
	binary switching information
	2
Supported DeviceIDs	application specific tag; operating hours counter
Note	Type of operation
	DeviceID
	default
	1097
	For further information please see the IODD PDF file at "Downloads"

UIT504



Ultrasonic sensor


UIA06000E1KG/IO-Link/US

Operating conditions		
Ambient temperature	[°C]	-20...70
Storage temperature	[°C]	-30...80
Protection		IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class A
Vibration resistance	EN 60068-2-6 Fc	(10-55) Hz 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz
Shock resistance	EN 60068-2-27 Ea	30 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
MTTF	[years]	102
UL approval	Ta	-20...70 °C
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight	[g]	242.5
Housing		Threaded type
Dimensions	[mm]	M30 x 1.5 / L = 103.8
Thread designation		M30 x 1.5
Material		stainless steel (1.4404 / 316L); PA; epoxy glass ceramics
Tightening torque	[Nm]	100
Displays / operating elements		
Display	Switching status	2 x LED, yellow
	echo	1 x LED, green
Teach function		yes
Accessories		
Items supplied		lock nuts: 2 x M30, stainless steel
Remarks		
Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A		

Ultrasonic sensor


UIA06000E1KG/IO-Link/US

Connection

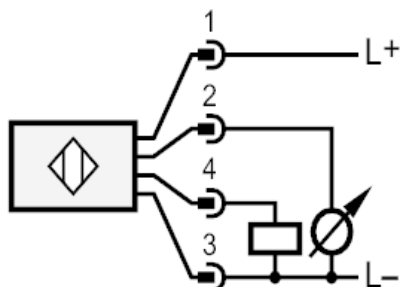

4 IO-Link

Diagrams and graphs

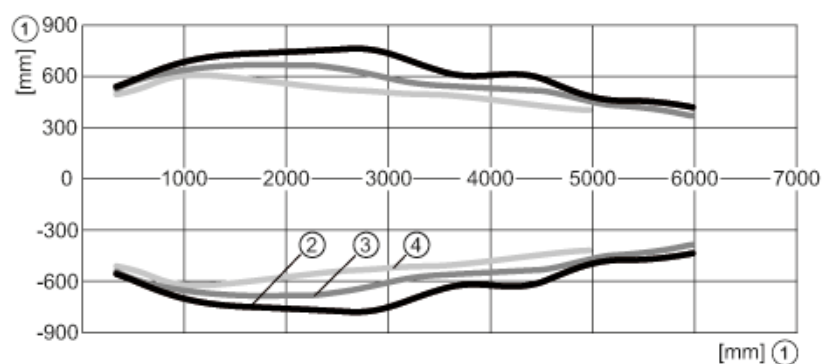

- 1 Distance
- 2 Standard sound cone
- 3 Medium sound cone
- 4 Narrow sound cone