


ZH4114



Connection cable

VSTGX080MSS0005K08STGP080-S

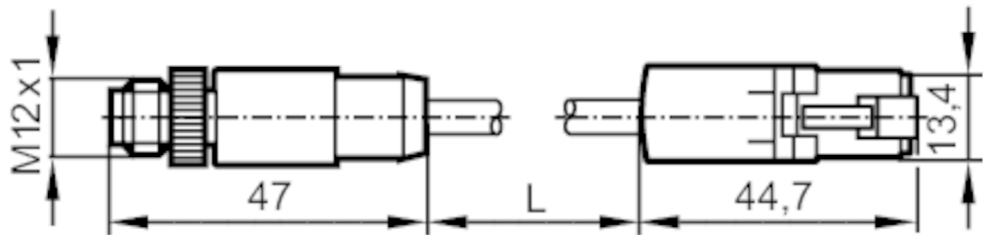

Application	
Design	Ethernet cable, X-coded
Application	Industrial applications; Cross-over patch cable; Patch cable
Operating conditions	
Ambient temperature	[°C] -25...90
Note on ambient temperature	-25...70 (RJ45)
Protection	IP 67; (RJ45: IP 20)
Mechanical data	
Weight	[g] 260
Material	PUR / TPU
Molded-body material	TPU (urethane) / PA
Material nut	diecast zinc, nickel-plated
Remarks	
Pack quantity	1 pcs.
Electrical connection - plug	

Connector: 1 x M12, straight; coding: X; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Tightening torque: 0.4 Nm



ZH4114




Connection cable

VSTGX080MSS0005K08STGP080-S

Electrical connection

Cable: 5 m, PVC, blue, Ø 6.4 mm; 4 x 2x0.14 mm²

Connection

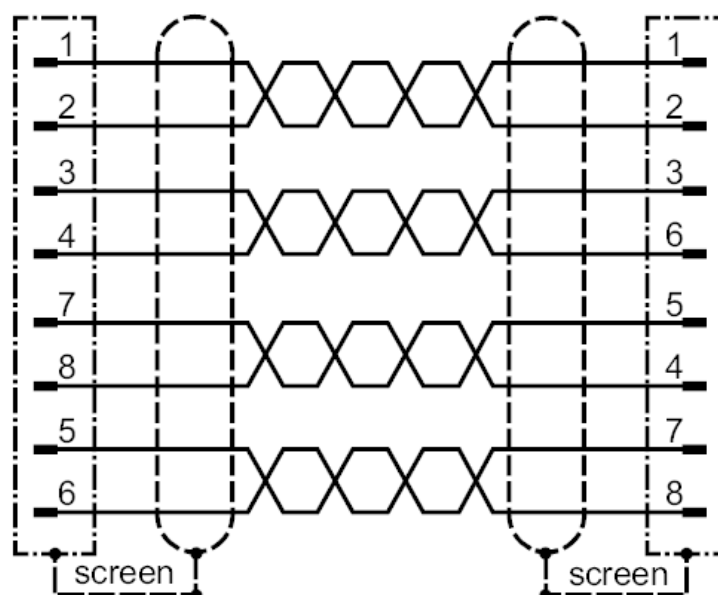

Electrical connection - plug

Connector: 1 x RJ45, straight; Moulded body: PA

