


# ZH4116



## Connection cable

VDOGX080MSS0010K08STGP080-S

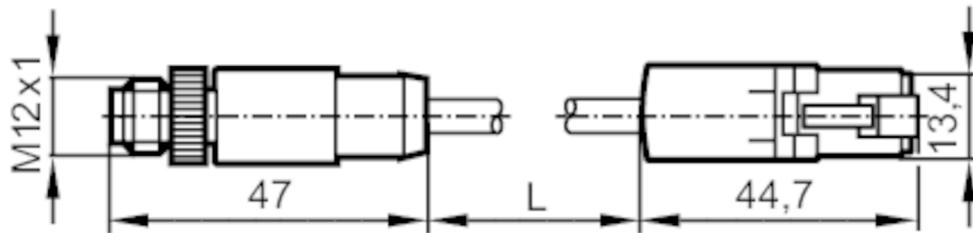

### Application

Design	Ethernet cable, X-coded
Application	Industrial applications; Cross-over patch cable; Patch cable

### Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67; (RJ45: IP 20)

### Mechanical data

Weight	[g]	460
Material		PUR / TPU
Molded-body material		TPU (urethane) / PA
Material nut		diecast zinc, nickel-plated

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection - plug

Connector: 1 x M12, straight; coding: X; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Tightening torque: 0.4 Nm



# ZH4116




## Connection cable

VDOGX080MSS0010K08STGP080-S

### Electrical connection

Cable: 10 m, PVC, blue,  $\varnothing$  6.4 mm; 4 x 2x0.14 mm<sup>2</sup>

### Connection

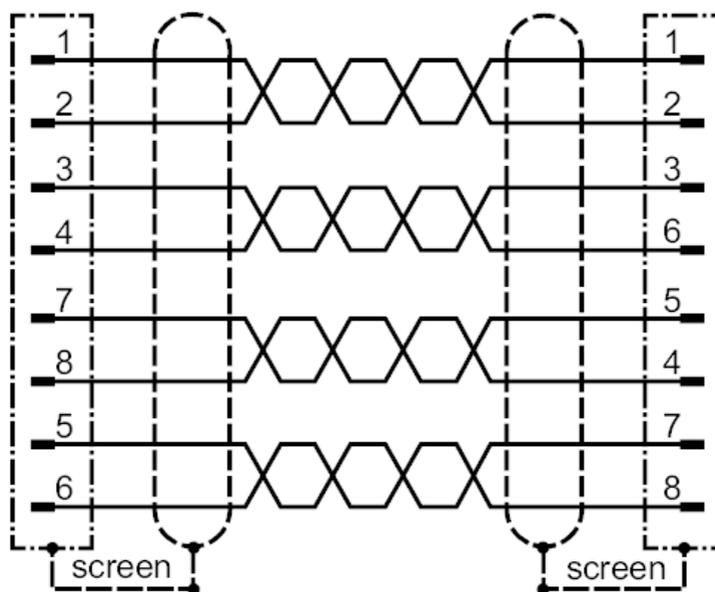

### Electrical connection - plug

Connector: 1 x RJ45, straight; Moulded body: PA

