


ZH4160



Mounting adapter for process sensors

ADTR, G1, TANK SPUD 6"

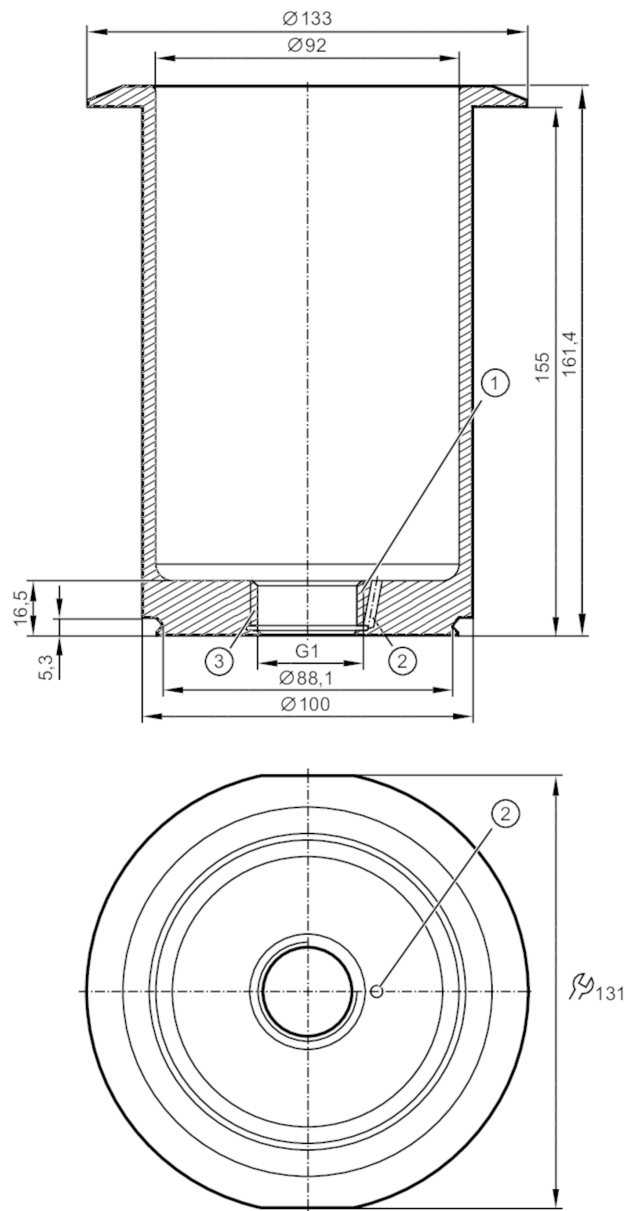

- 1 Aseptoflex Vario
- 2 Leakage port
- 3 sealing area



EC 1935/2004 FDA

Application

Design	accessories for, PM17xx, Rosemount 1199 (SSW) 6" Tank Spud Seal	
Pressure rating	34 bar	3.4 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

ZH4160



Mounting adapter for process sensors

ADTR, G1, TANK SPUD 6"

Mechanical data	
Weight	[g] 1814.368
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; O-rings: EPDM
Sensor connection	G 1 Aseptoflex Vario
Process connection	Tank Spud Rosemount 1199 (SSW) 6" Tank Spud Seal
Sealing	Gasket
Hygienic equipment class to DIN 11866	H4
Accessories	
Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 24 x 2, FKM, FDA compliant, E30123
	sealing ring:, PEEK, FDA compliant, E30124
Remarks	
Pack quantity	1 pcs.