


ZJ4009



Wirable plug

SSTGF030ZDSFPKG

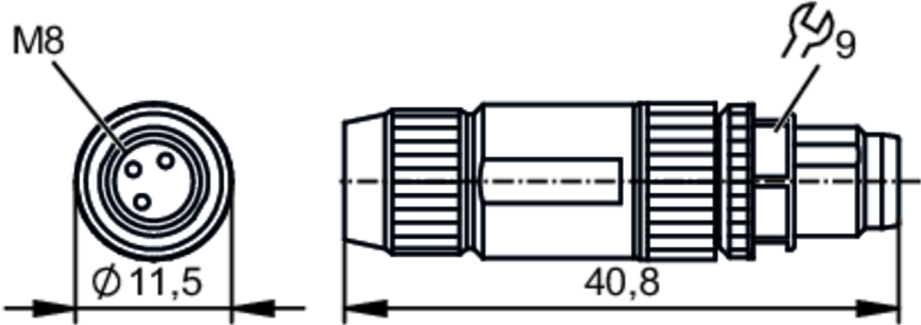

| Application             |      |                                             |
|-------------------------|------|---------------------------------------------|
| System                  |      | gold-plated contacts                        |
| Electrical data         |      |                                             |
| Operating voltage       | [V]  | < 32 AC/DC                                  |
| Protection class        |      | III                                         |
| Max. current load total | [A]  | 4                                           |
| Operating conditions    |      |                                             |
| Ambient temperature     | [°C] | -25...85                                    |
| Protection              |      | IP 67                                       |
| Mechanical data         |      |                                             |
| Weight                  | [g]  | 14.2                                        |
| Material                |      | PA                                          |
| Molded-body material    |      | PA                                          |
| Material nut            |      | diecast zinc                                |
| Accessories             |      |                                             |
| Items supplied          |      | sealing: 2,5...3,2 mm/3,2...4 mm/4...5,1 mm |
| Remarks                 |      |                                             |
| Pack quantity           |      | 1 pcs.                                      |

# ZJ4009



## Wirable plug


SSTGF030ZDSFPKG

### Electrical connection

insulation displacement technology: 0.14...0.34 mm²; Core insulation: PVC/PP/TPE; (Ø 1.0...1.6 mm); Cable sheath: Ø 2.5...5.1 mm

### Electrical connection - plug

Connector: 1 x M8, straight; coding: A; Moulded body: PA; Locking: diecast zinc; Contacts: gold-plated



### Connection

