




## AS-Interface value-added automation set for pneumatic quarter-turn actuators

ADDED VALUE PACKAGE AS-i T5

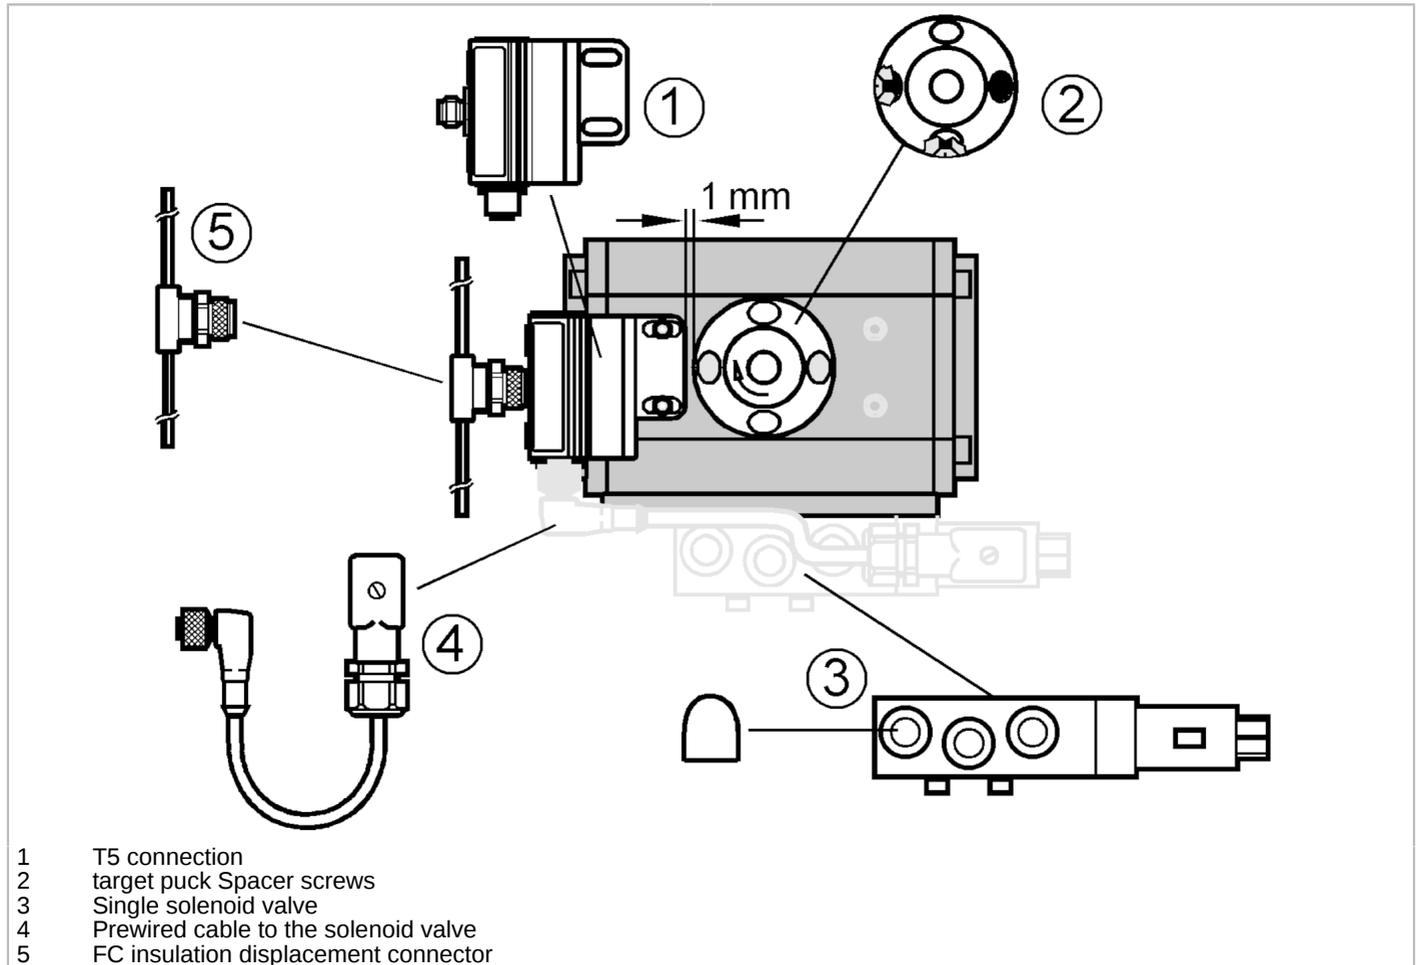

| Product characteristics                 |                                                                                                                                                                                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output function                         | PNP                                                                                                                                                                                             |
| Application                             |                                                                                                                                                                                                 |
| Application                             | direct open and close valve control                                                                                                                                                             |
| Components                              | T5 connection: 1, AC2316<br>target puck: 1, E17328<br>Flat cable insulation displacement connector: 1, E75471<br>Single solenoid valve: 1, ZJF131<br>Silencer: 2<br>Connection cable: 1, EVC031 |
| Electrical data                         |                                                                                                                                                                                                 |
| Max. current consumption from AS-i [mA] | 160                                                                                                                                                                                             |
| Operating voltage AUX DC [V]            | 26.5...31.6; (cULus - Class 2 source required)                                                                                                                                                  |
| Inputs / outputs                        |                                                                                                                                                                                                 |
| Number of inputs and outputs            | Number of digital inputs: 2; Number of digital outputs: 1                                                                                                                                       |
| Inputs                                  |                                                                                                                                                                                                 |
| Number of digital inputs                | 2                                                                                                                                                                                               |
| Outputs                                 |                                                                                                                                                                                                 |
| Number of digital outputs               | 1                                                                                                                                                                                               |

# ZZ0670




## AS-Interface value-added automation set for pneumatic quarter-turn actuators

ADDED VALUE PACKAGE AS-i T5

|                               |       |                     |
|-------------------------------|-------|---------------------|
| Output function               |       | PNP                 |
| <b>AS-i classification</b>    |       |                     |
| AS-i version                  |       | 2.1                 |
| AS-i profile                  |       | S-7.A.E             |
| AS-i I/O configuration        | [hex] | 7                   |
| AS-i ID code                  | [hex] | A.E                 |
| <b>Mechanical data</b>        |       |                     |
| Weight                        | [g]   | 788.2               |
| Mounting                      |       | non-flush mountable |
| Hole spacing                  | [mm]  | 130                 |
| Shaft height of actuator stem | [mm]  | 30                  |
| <b>Remarks</b>                |       |                     |
| Pack quantity                 |       | 1 pcs.              |

### Electrical connection

#### Electrical connection - Socket



#### Outputs

|   |                      |
|---|----------------------|
| 3 | External voltage -   |
| 4 | Switching output 1 + |

#### Electrical connection - plug



#### Connection

#### Connection

|   |        |
|---|--------|
| 1 | AS-i + |
| 3 | AS-i - |