




Positioner for industrial valves

SMART POSITIONER min 3 bar

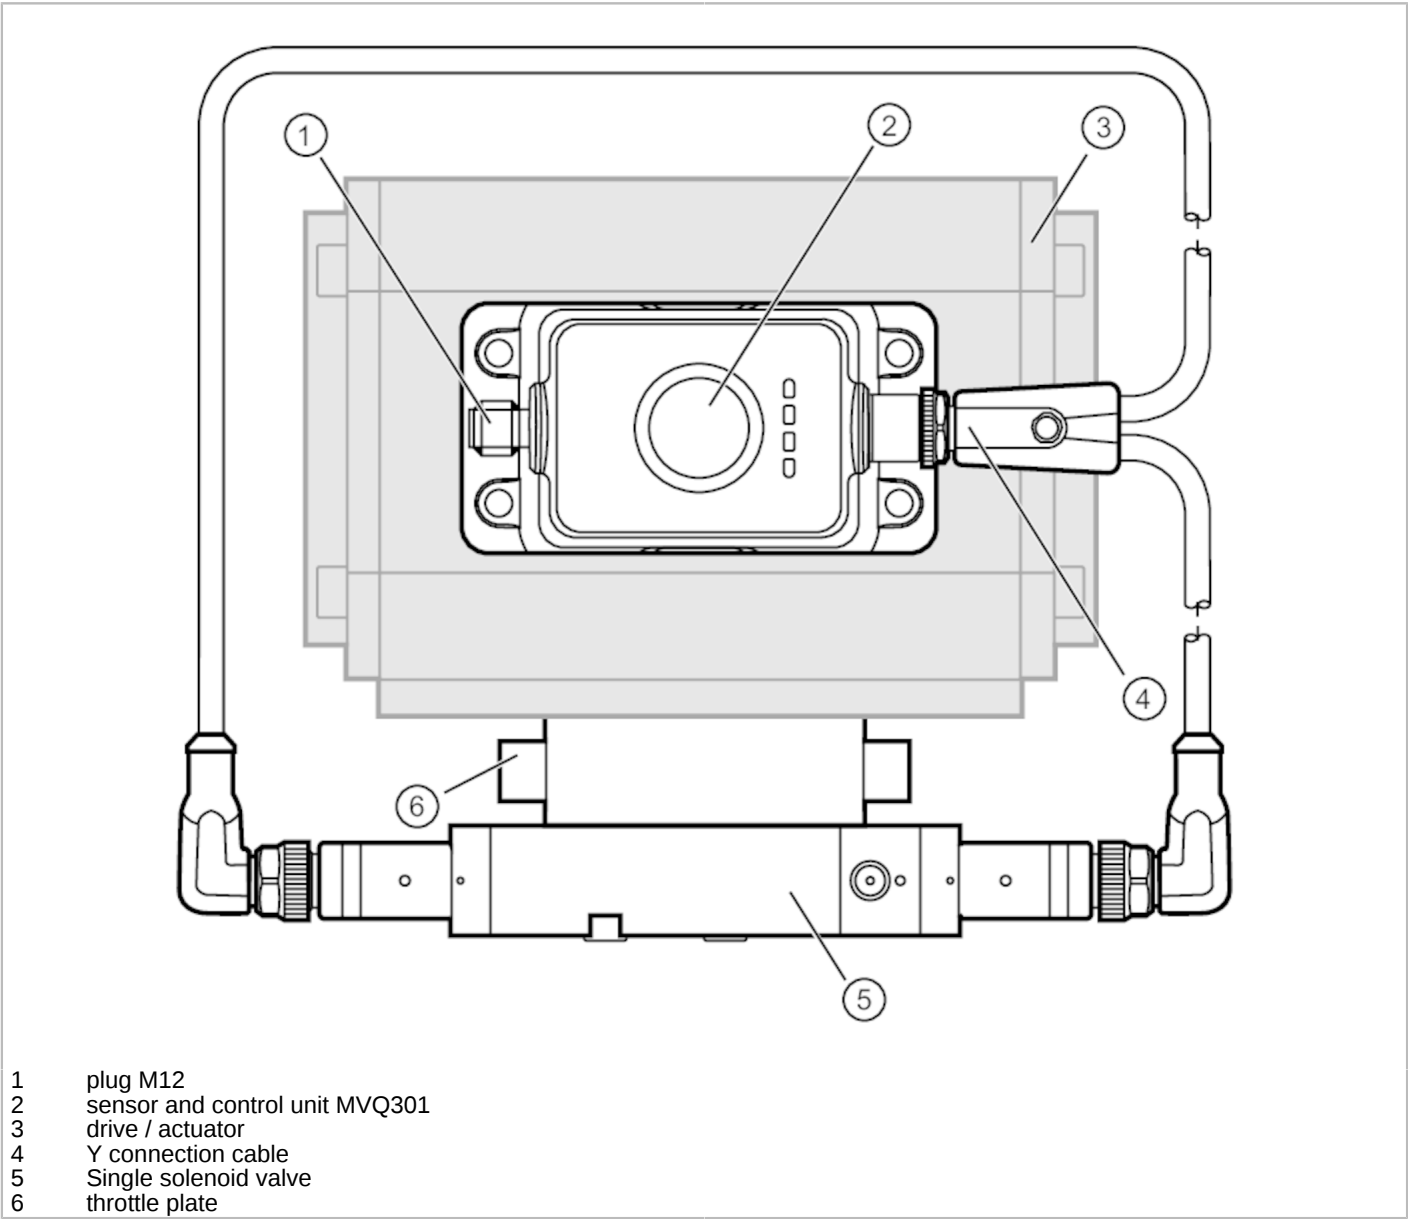

- 1 plug M12
- 2 sensor and control unit MVQ301
- 3 drive / actuator
- 4 Y connection cable
- 5 Single solenoid valve
- 6 throttle plate

Application	
Application	suitable for double-acting quarter-turn actuators; defined home position in case of a power failure
Components	position sensor and control unit: 1, MVQ301
	5/3-way solenoid valve with defined home position: 1, ZJF119
	throttle plate: 1, ZJF122
	Connection cable: 1, EVC508
	Silencer: 2
	with mounting material
Interfaces	
Communication interface	IO-Link
Unterstützte Masterportklasse	B
Mechanical data	
Weight	[g] 943.6

ZZ0688



Positioner for industrial valves

SMART POSITIONER min 3 bar

Operating pressure range	[bar]	2.5...8
Remarks		
Pack quantity		1 pcs.