



DIAL HEIGHT GAUGES



1351-12




driving wheel
on the back

clamp for protractors (optional)



- One counter reads in the plus direction and another in the minus direction, so incremental measurement can be made in either direction
- Carbide tipped scriber
- Made of stainless steel (except the base)
- With driving wheel
- With dial test indicator holder
- Supplied with dust cover
- Optional accessory: clamp for protractors (part no. 2372-CLAMP)

dial test indicator holder (included)

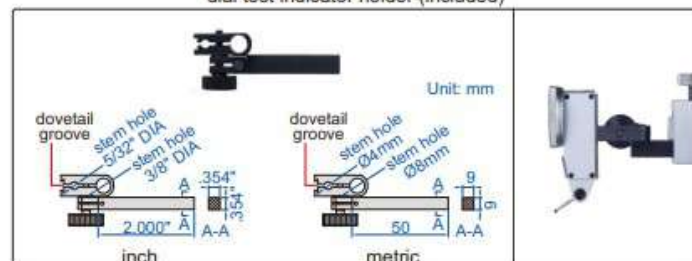

Inch

Part No.	Range	Dial indicator graduation	Accuracy	L	a1	a2	b	c	D (DIA)
1351-12	0-12"	.001"	±.0016"	18.701"	5.315"	1.693"	3.307"	1.299"	.591"
1351-18	0-18"	.001"	±.0020"	25.984"	7.087"	2.126"	3.465"	1.496"	.787"
1351-24	0-24"	.001"	±.0020"	31.890"	7.087"	2.126"	3.465"	1.496"	.787"

Metric

Part No.	Range	Dial indicator graduation	Accuracy	L	a1	a2	b	c	D
1351-300	0-300mm	0.01mm	±0.04mm	475	135	43	84	33	Ø15
1351-450	0-450mm	0.01mm	±0.05mm	660	180	54	88	38	Ø20
1351-600	0-600mm	0.01mm	±0.05mm	810	180	54	88	38	Ø20

(mm)