

DIGITAL INDICATORS (WITH TRANSMISSION BUTTON AND SIGNAL LIGHT)

DATA
OUTPUT



press the button
to transmit data
data transmission
signal light



2138-10E

press the button
to transmit data
data transmission
signal light



2139-25E

press the button
to transmit data
data transmission
signal light



2139-25PE


press the button
to transmit data
data transmission
signal light




2138-50E




2138-10E
2139-10E

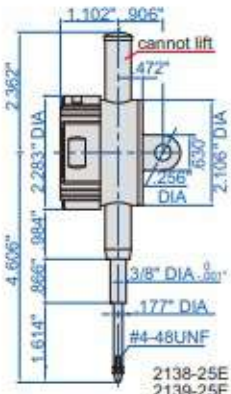


2138-25E
2139-25E

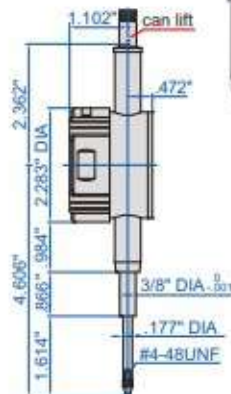

2138-25PE
2139-25PE

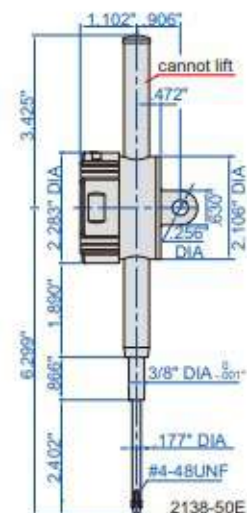

2138-50E
2139-50E



- Meet ASME B89.1.10M-2001
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement, data output
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory:
flat back: wireless transmitter part no. **7315-51** (receiver is needed) page 6,
data output cable part no. **7302-40M** page 19, **7305-40M** page 15,
lug back: wireless transmitter part no. **7315-50M** (receiver is needed) page 6,
data output cable part no. **7302-40M** page 19, **7305-40M** page 15,
backs (page 348~349), contact points (page 342~347)

alarm when over tolerance

blink when
over —
lower limit

blink when
— over
upper limit

Resolution .00005"/0.001mm

Part No.	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2138-10FE*	.5"/12.7mm	±.00015"	.00005"	.337lbf	can lift	flat back
2138-10E*	.5"/12.7mm	±.00015"	.00005"	.337lbf	can lift	lug back
2138-25E*	1"/25.4mm	±.00015"	.00005"	.495lbf	cannot lift	lug back
2138-50E*	2"/50.8mm	±.00015"	.00005"	.562lbf	cannot lift	lug back
2138-25PE*	1"/25.4mm	±.00015"	.00005"	.495lbf	can lift	flat back
2138-50PE*	2"/50.8mm	±.00015"	.00005"	.562lbf	can lift	flat back

Resolution .0005"/0.01mm

Part No.	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2139-10E*	.5"/12.7mm	±.0015"	.0005"	.337lbf	can lift	lug back
2139-25E*	1"/25.4mm	±.0015"	.0005"	.495lbf	cannot lift	lug back
2139-50E*	2"/50.8mm	±.0015"	.0005"	.562lbf	cannot lift	lug back
2139-25PE*	1"/25.4mm	±.0015"	.0005"	.495lbf	can lift	flat back
2139-50PE*	2"/50.8mm	±.0015"	.0005"	.562lbf	can lift	flat back

* Supplied with manufacturer inspection certificate

analog pointer

analog pointer



spindle lift knob
is included



320°

display can be
rotated by 320°

