



## DIGITAL RADIUS GAUGE (LOW ACCURACY)

DATA  
OUTPUT

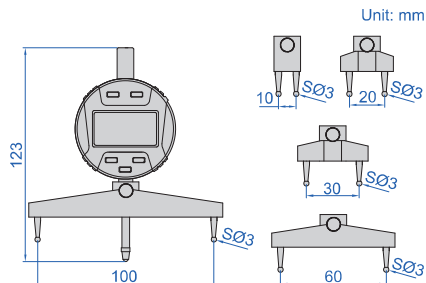

- Resolution: 0.01mm/0.001"
- Buttons: on/off, hold, mm/inch, s (select jaws), zero
- Measure radius of internal or external arcs
- Display can be rotated by 320°
- Supplied with 5 jaws for different sizes of arc
- Data output
- Battery CR2032
- Automatic power off (time is adjustable)
- Optional accessory:  
calibration standard (code **2183-BLOCK**),  
wireless transmitter code **7315-50M**  
(receiver is needed)

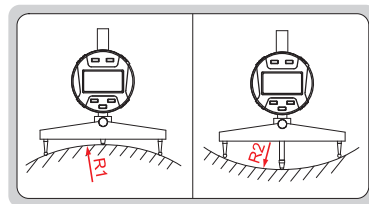

calibration standard application



Calibration standard (optional)

Code	Range of external radius (R1)	Range of internal radius (R2)	Accuracy (mm)
<b>2183</b>	5-910mm/0.2-35.83"	7-910mm/0.3-35.83"	±0.01R *

Code	Remark
<b>2183-BLOCK</b>	includes 5 standard blocks

\* R is the radius to be measured. For example, radius is 100mm, the accuracy is ±0.01x100=±1mm