



ATTENTION: CLOCKWISE  
OPERATION ONLY



- Ratchet head
- According to DIN ISO 6789, ASME B107.300
- All-metal construction, sturdy and durable

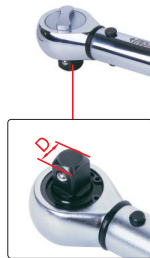

square driver

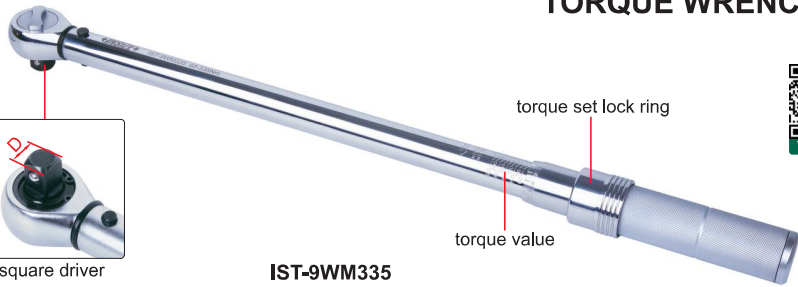

IST-9WM335

## TORQUE WRENCHES



### SPECIFICATION

Code	Range (clockwise)	Accuracy	Graduation	Square driver (D)	Length	Weight
IST-9WM5S	1~5N.m	±3%	0.05N.m	1/4"	183mm	300g
IST-9WM10S	2~10N.m		0.1N.m	1/4"	195mm	320g
IST-9WM12	2.5~12N.m		0.05N.m	1/4"	290mm	680g
IST-9WM20	4~20N.m		0.1N.m	1/4"	290mm	680g
IST-9WM30	6~30N.m		0.2N.m	3/8"	318mm	820g
IST-9WM60	10~60N.m		0.5N.m	3/8"	388mm	960g
IST-9WM100	20~100N.m		0.5N.m	1/2"	443mm	1040g
IST-9WM125	25~125N.m		0.5N.m	1/2"	443mm	1040g
IST-9WM200	40~200N.m		1N.m	1/2"	468mm	1160g
IST-9WM335	65~335N.m		1N.m	1/2"	528mm	1300g
IST-9WM500	100~500N.m		2.5N.m	3/4"	855mm	5000g
IST-9WM800	160~800N.m		±3% (≤500N.m) ±4% (>500N.m)	4N.m	3/4"	1055mm
IST-9WM1000	200~1000N.m	±4% (>500N.m)	5N.m	3/4"	1055mm	5900g
IST-9WM1500	300~1500N.m	±3% (≤500N.m) ±4% (>500N.m)	5N.m	1"	1260mm	9200g
IST-9WM2000	400~2000N.m	±4% (>500N.m)	10N.m	1"	1260mm	9200g
IST-9WM3000	600~3000N.m	±4%	15N.m	1"	1260mm	10500g
IST-9WM1500L	300~1500N.m	±3% (≤500N.m) ±4% (>500N.m)	5N.m	1"	1600mm	13000g
IST-9WM2000L	400~2000N.m	±4% (>500N.m)	10N.m	1"	1600mm	13000g
IST-9WM3000L	600~3000N.m	±4%	15N.m	1"	1840mm	15200g