


Lead Free Brass Ball Valve

2 Piece, Threaded FIP x Crimp Pex Connection, 400 CWP

T-412G FIP x CRIMP

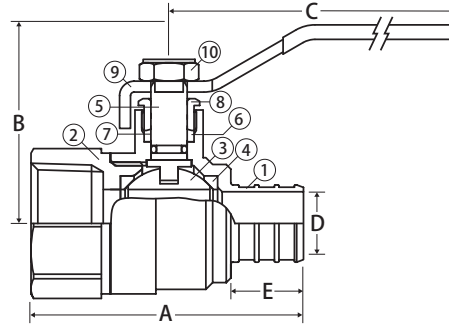

FEATURES

Dezincification Resistant Brass Alloy
Gland Follower and Single O-Ring Stem Design
Blow-Out Proof Stem
100% Leak Tested
IAPMO Certified - NSF 61 & NSF 372 Certified
ASTM F1807
Wetted Surfaces Contain Less than .25% Content

CERTIFICATIONS/APPROVALS

ASTM F1807
CSA Certified
- ASME A112.4.14
IAPMO Certified
- NSF 61-8
- NSF 372
- Uniform Plumbing Code (cUPC)
• IAPMO/ANSI Z1157-2014
• NSF/ANSI 14-2014
ANSI B1.20.1

PRESSURE/TEMPERATURE RATING

Body Rated to 400 CWP
Crimp Connection Rated to 100 CWP up to 180°F

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46400
2	End Connection	Lead Free Brass - C46400
3	Ball	304 Stainless Steel
4	Seat (2)	PTFE
5	Stem	304 Stainless Steel
6	Packing	PTFE
7	Stem O-ring	Buna-N
8	Packing Gland	Lead Free Brass - C46400
9	Handle	Steel - Chrome Plated
10	Handle Nut	Steel - Chrome Plated
11	Lock Washer	Steel - Chrome Plated

DIMENSIONS

Part No	Size	A	B	C	D	E
103-554PG	3/4"	2.32	1.81	3.35	0.53	0.63
103-555PG	1"	2.89	2.09	4.29	0.71	0.8