


# Cast Iron Y-Strainer



## Bolted Bonnet • Stainless Steel Screen • Class 125



F-651

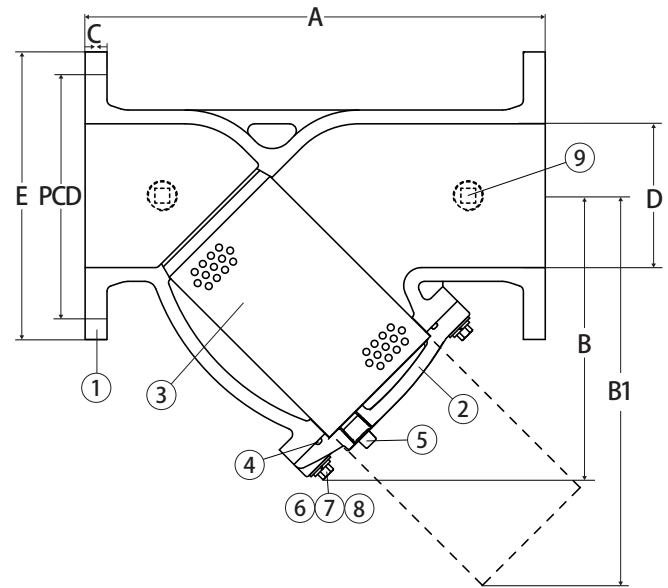

### Approvals

- Flange: ANSI B16.1
- Lead Free Compliant

### Temperature Rating

- 14° F to 248° F

### Features

- Epoxy coated cast iron
- 1/4" NPT test plug upstream and downstream

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Material Specifications

No.	Part	Materials
1	Body	Cast Iron - ASTM A126 B
2	Cover	Cast Iron - ASTM A126 B
3	Screen	Stainless Steel 304 - 20 Mesh
4	Packing	EPDM
5	Drain Plug	Brass - 3/4" NPT
6	Bolt	Carbon Steel Galvanized
7	Spring Washer	Carbon Steel Galvanized
8	Washer	Carbon Steel Galvanized
9	Test Plug	Brass - 1/4" NPT

### Dimensions

Part No.	Size	Weight	A	B	B1	C	D	E	Bolts	Cv	PCD	Screen Mesh	N-0C
106-625	2-1/2"	22	11.42	5.39	8.1	0.71	2.56	7.28	4	110.9	5.50	0.06 (10)	4-3/4"
106-603	3"	28	12.20	5.98	9.4	0.71	3.15	7.87	4	174.2	6.00	0.06 (10)	4-3/4"
106-604	4"	36	13.78	8.07	12.5	0.71	3.94	8.66	8	253.4	7.50	0.06 (10)	8-3/4"
106-606	6"	73	18.90	10.59	15.0	0.71	5.91	11.22	8	570.3	9.50	0.06 (10)	8-7/8"
106-608	8"	123	23.62	13.43	20	0.75	7.87	13.39	8	863.4	11.75	0.10 (5)	8-7/8"
106-610	10"	291	28.74	17.91	27.56	0.87	10	15.94	12	1711	14.25	0.10 (5)	12-1"
106-612	12"	454	33.46	18.74	28.74	0.96	12	18.11	12	2218	17	0.10 (5)	12-1"