


LED BACKLIT PANEL

5 CCT and 3 Wattage Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____

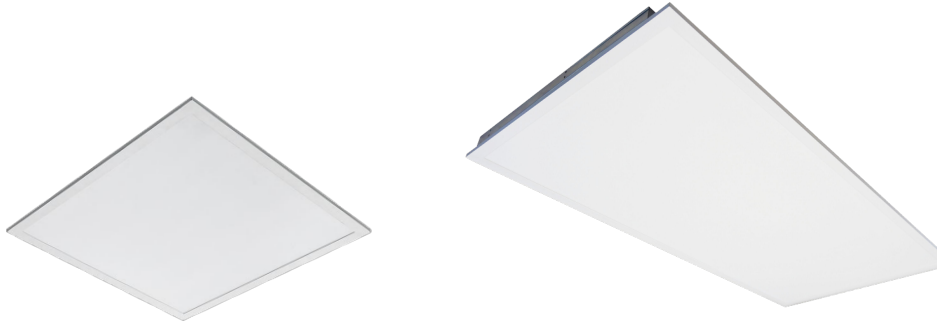

Performance & Features

LED Source

- High efficacy, micro power LED with 5 CCT Selectable (3000K/3500K/4000K/5000K/6500K)
- CRI >80
- L70 lifespan of 54,000 hours
- 0-10V dimmable driver
- 120-277V input
- No flicker

Construction

- Durable cold-rolled steel and extruded aluminum housing
- Long-lasting dark bronze finish available
- Damp Location Rated
- Frosted Lens
- Operates efficiently in temperatures from -40°F to 122°F

Certifications and Warranty

- ETL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

SKU Guide

Example: DPS-22-U-P-30-5CCT


Family	Size	U	P	Wattage	CCT	Pack
DPS	22 = 2x2 24 = 2x4	U = 120-277V Universal	P = DLC Premium	30W = 18W-30W Select 50W = 30W-50W Select	5CCT = 3000K 3500K 4000K 5000K 6500K	4

Specification


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
2x2 DPS-22-U-P-30-5CCT-4	18W/24W/30W	2250 3000 3750	5CCT 3000K/3500K/4000K/ 5000K/6500K	125	White
2x4 DPS-24-U-P-50-5CCT-4	30W/40W/50W	3750 5000 6250	5CCT 3000K/3500K/4000K/ 5000K/6500K	125	White

Contact for custom configuration & specifications

Accessories



Surface Mount Kit
DP-SMF-22-W
DP-SMF-24-W
DP-SMF-14-W




Suspension Mount Kit
DP-PKT-12-S
DP-PKT-14-S



EM Battery Backup
DPS-EL


Dimensions

DPS-24-U-P-50-5CCT

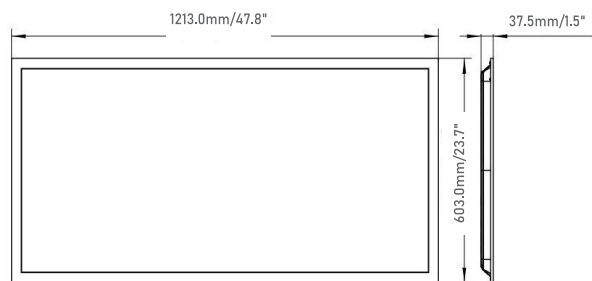

Product Weight : 4.18Kg/9.22lb

DPS-22-U-P-30-5CCT

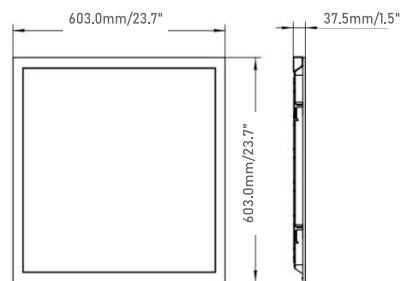



Product Weight : 2.62Kg/5.78lb

Packaging Dimensions

SKU#	Master Carton	Qty
DPS-22-U-P-30-5CCT	25.2×25.2×5.9 in.	4
DPS-24-U-P-50-5CCT	49.1×25.2×5.9 in.	4

Photometry

DPS-22-U-P-30-5CCT

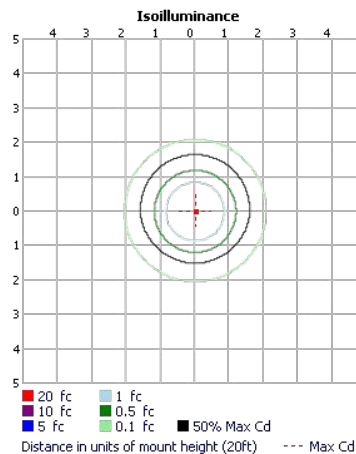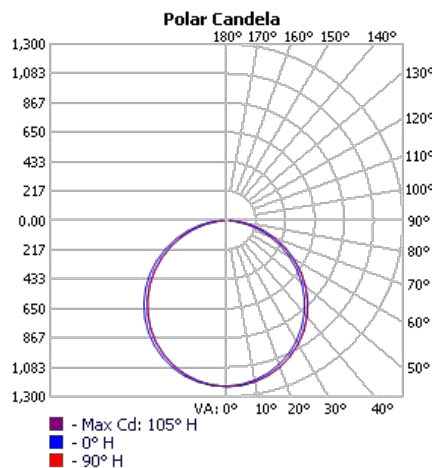

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	953.8	26.2%
0-40	1,568.3	43%
0-60	2,800.9	76.8%
60-90	844.1	23.2%
0-90	3,645.0	100%

BUG Rating

Forward Light

	Lumens	Lumens %
Low (0-30):	474.0	13%
Medium(30-60):	906.3	24.9%
High(60-80):	353.2	9.7%
Very High(80-90):	43.0	1.2%

Back Light

	Lumens	Lumens %
Low(0-30):	480.2	13.2%
Medium(30-60):	941.5	25.8%
High(60-80):	390.4	10.7%
Very High(80-90):	57.8	1.6%
Trapped Light:	0.000	0%

B1 - Ux - G1

Lumens Lumens %

Note: Additional Photometry available on request