


LED Flood Lights

3 Wattage & 3 CCT Selectable

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- 3-CCT White Color Selectable (3000K/4000K/5000K)
- CRI >80
- L70 lifespan of 100,000 hours
- 0-10V dimmable driver
- 120-277V input
- <5% flicker

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish available
- Wet Location Rated
- Clear glass diffuser
- Kunckle Mount, Slip-fitter Mount
- Operates efficiently in temperatures from -40°F to 122°F

Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

SKU Guide

Example: FLLS-15T35W-3CCT-DV2-PC-BZKM

Family	Wattage	CCT	Driver & Voltage	Controls	Finish	Mount
FLLS	15T35W = 15W/25W/35W 40T80W = 40W/60W/80W 100T150W = 100W/120W/150W	3CCT = 3000K 4000K 5000K	D = 0-10V Dimming	DV2 = 120-277V	PC = Photocell	BZ = Bronze KM = Knuckle AM = Slip Fitter

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
FLLS-15T35W-3CCT-DV2-PC-BZKM	15W/25W/35W	2100/3500/4900	30K/40K/50K	140	Bronze
FLLS-40T80W-3CCT-DV2-PC-BZKM	40W/60W/80W	5600/8400/11,200	30K/40K/50K	140	Bronze
FLLS-100T150W-3CCT-DV2-PC-BZAM	100W/120/150W	14,500/17,400/21750	30K/40K/50K	145	Bronze

Contact for custom configuration & specifications

Accessories





FLLS-KM
Knuckle Mount





FLLS-FM
Flush Mount

Dimensions

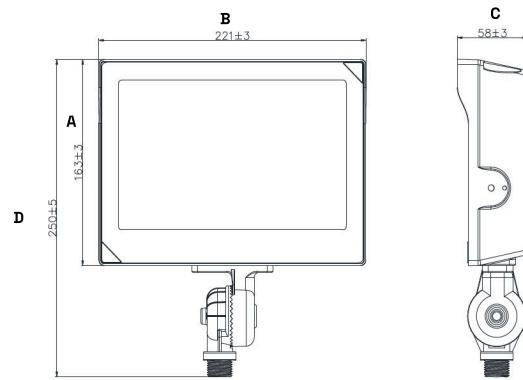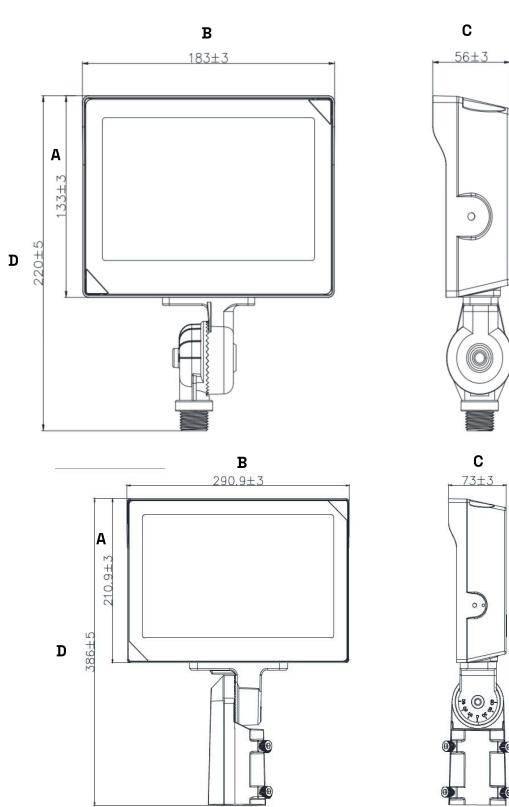

Model	A	B	C	D
FLLS-15T35W-3CCT-DV2-PC-BZKM	5.2 in	7.2 in	2.2 in	8.6 in
FLLS-40T80W-3CCT-DV2-PC-BZKM	6.4 in	8.7 in	2.2 in	9.8 in
FLLS-100T150W-3CCT-DV2-PC-BZAM	8.2 in	11.4 in	2.8 in	15.1 in

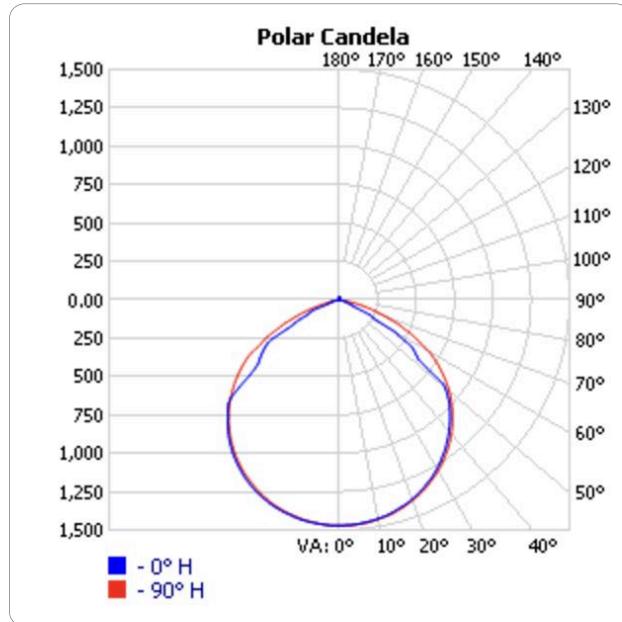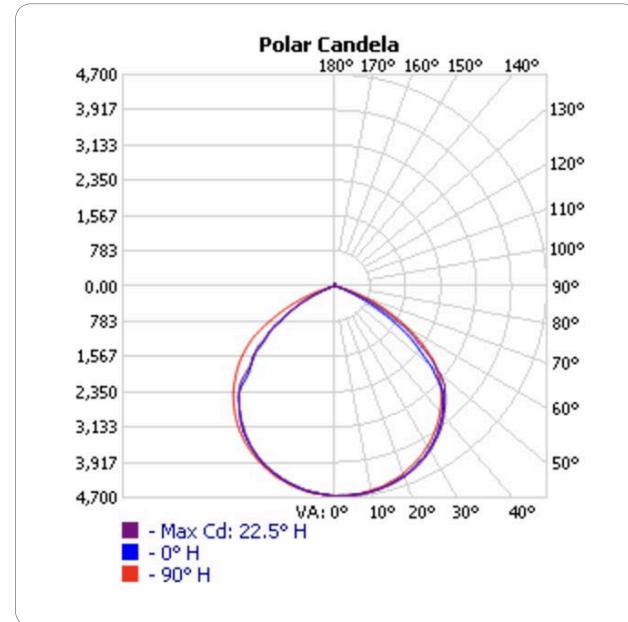Photometry
FLLS-15T35W-3CCT-DV2-PC-BZKM

FLLS-40T80W-3CCT-DV2-PC-BZKM

FLLS-100T150W-3CCT-DV2-PC-BZAM
