




LED Solar Barn Light

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 with Single CCT 5000K
- CRI >70
- 20%-100% dimmable driver
- PIR Sensor with photocell tech
- Smart Motion activated

Construction

- Highly durable die-cast aluminum, long lasting dark black finish
- Wet Location Rated
- Clear Prismatic Lens
- 8 hours charging time
- Operates efficiently in temperatures from -4°F to 104°F
- >1000 battery cycles
- 15 ft. lead wire

Certifications and Warranty

- UL Listed
- Backed by a 3-year limited warranty


Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Battery Spec (Li-on)	Solar Panel
SNEB50-MS-5K-BK	45W	4000LM	5000K	90	9.6V/6000mAh	10.5W 15V 0.7A

Contact for custom configuration & specifications

Dimensions

SNEB50-MS-5K-BK

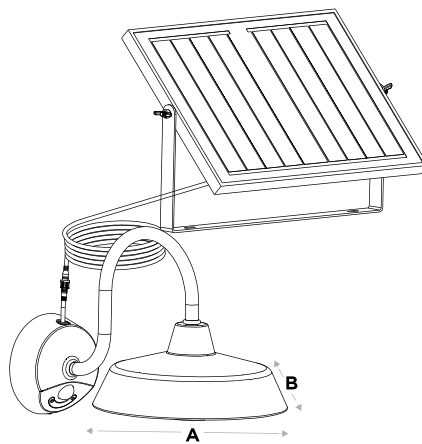

SNEB50-MS-5K-BK

A	7.6 in
B	4.8 in
C	5.0 in


Modes of Operation

5 modes of operation:

- 4 Hr mode
- All-night mode
- Energy-Saving mode
- Motion-only mode
- Occupancy mode

MODES OF OPERATION

(Operate at maximum of 25ft from the fixture)

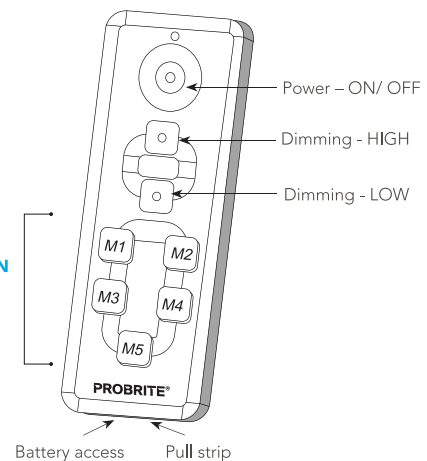

Packaging Dimensions

SKU#	Master Carton	Qty
SNEB50-MS-5K-BK	17.1 X 12.8 X 23.3 in	2