




LED Solar Wall Pack Light

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 with Single CCT 5000K
- CRI >70
- 20%-100% dimmable driver
- Microwave Sensor with photocell tech
- Smart Motion activated

Construction

- Highly durable die-cast aluminum, long lasting dark black finish
- Wet Location Rated
- Clear Prismatic Lens
- 8 hours charging time
- Operates efficiently in temperatures from -4°F to 104°F
- >1000 battery cycles

Certifications and Warranty

- UL Listed
- Backed by a 3-year limited warranty

SKU Guide

Example: SPRW15-H-MS-5K-BK

Family

SPRW15

Motion
Sensor Activated

MS= Motion sensor

CCT

5000K

Finish

BK= Black


Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Battery Spec (Li-on)	Solar Panel
SPRW15-H-MS-5K-BK	12W	1500LM	5000K	125	3.2V 6000 mAh	10.5W 15V 0.7A
SPRW45-H-MS-5K-BK	35W	4000LM		114	6.4V 6000 mAh	4W 5V 0.8A

Contact for custom configuration & specifications

Dimensions

SPRW15-H-MS-5K-BK
SPRW45-H-MS-5K-BK

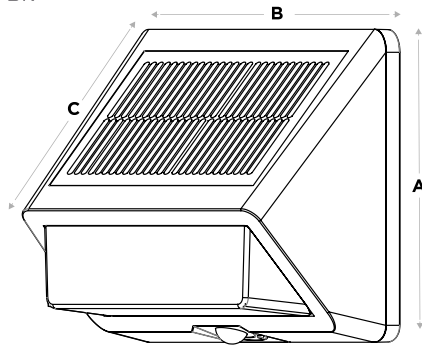


	SPRW15-H-MS-5K-BK		SPRW45-H-MS-5K-BK
A	9.8 in	A	16.5 in
B	8.8 in	B	13.9 in
C	5.7 in	C	8.3 in

Modes of Operation

5 modes of operation:

- 4 Hr mode
- All-night mode
- Energy-Saving mode
- Motion-only mode
- Occupancy mode

MODES OF OPERATION
(Operate at maximum of 25ft from the fixture)

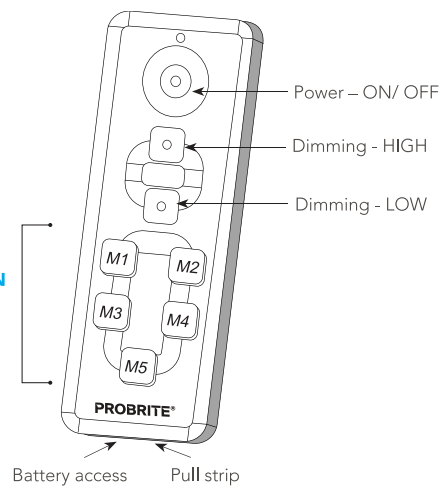

Packaging Dimensions

SKU#	Master Carton	Qty
SPRW15-H-MS-5K-BK	15.2 x 11.6 x 20.8 in	4
SPRW45-H-MS-5K-BK	20.7 x 18.6 x 15.8 in	2