



LED Solar Workbench Shop Light

Project: _____ Location: _____
Date: _____ Part #: _____
Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 with Single CCT 5000K
- CRI >70
- 20%-100% dimmable driver
- PIR Sensor with photocell tech
- An integrated USB port

Construction

- Highly durable die-cast aluminum, long lasting dark black finish
- Wet Location Rated
- Frosted Lens
- 8 hours charging time
- Operates efficiently in temperatures from -4°F to 104°F
- >1000 battery cycles
- 15 ft. lead wire

Certifications and Warranty

- UL Listed
- Backed by a 3-year limited warranty

SKU Guide

Example: SDAY50-MS-5K-BK

Family

SDAY

Motion
Sensor Activated

MS= Motion sensor

CCT

5000K

Finish

BK= Black


Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Battery Spec (Li-on)	Solar Panel
SQAD30-MS-5K-BK	24W	2400LM	5000K	100	6.4V/6000 mAh	10W 10V 1W

Contact for custom configuration & specifications

Dimensions

SQAD30-MS-5K-BK

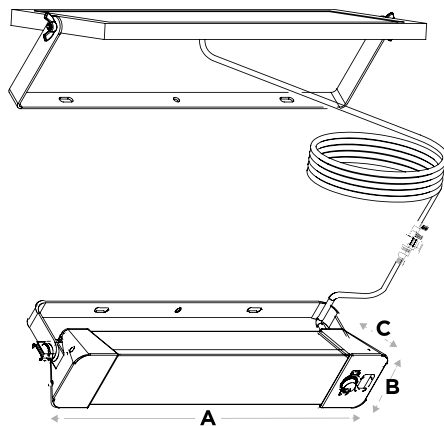


Modes of Operation

5 modes of operation:

- 4 Hr mode
- All-night mode
- Energy-Saving mode
- Motion-only mode
- Occupancy mode

MODES OF OPERATION

(Operate at maximum of 25ft from the fixture)

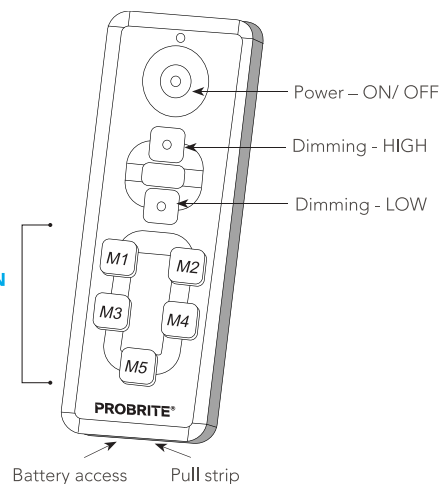

Packaging Dimensions

SKU#	Master Carton	Qty
SQAD30-MS-5K-BK	18.7 in X 9.9 in X 19.9 in	4