


LED Linear Strip Light

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- High efficacy, micro power LED with 5 CCT Selectable (3500K/4000K/5000K/5700K/6500K)
- CRI >80
- 0-10V dimmable driver
- 120-277V input
- Available with integral Microwave Motion Sensor
- Available with 8W Emergency Backup
- Emergency Time: 90 Min

Construction

- Durable Die-cast Aluminum White finish
- Suitable for damp locations
- 120° Beam Angle
- Operates efficiently in temperatures from -22°F to -140°F

Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- FCC Complaint
- Backed by a 5-year limited warranty

SKU Guide

Example: STR4-20T40W-5CCT-DV2

Family and Size	Wattage	CCT	Driver & Voltage		Options
STR2 = 2FT STR4 = 4FT STR8 = 8FT	15T25W 20T40W 50T80W	5CCT = 3500K 4000K 5000K 5700K 6500K	D = 0-10V Dimming	V2 = 120-277V	EM = Battery Backup S = Microwave Sensor

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
2FT STR2-15T25W-5CCT-DV2	15W/20W/25W	1950 2600 3250	3500/4000/5000 /5700/6500K	130	White
4FT STR4-20T40W-5CCT-DV2	20W/30W/40W	3250 3900 5200	3500/4000/5000/ 5700/6500K	130	White
8FT STR8-50T80W-5CCT-DV2	50W/64W/80W	6500 8320 10400	3500/4000/5000/ 5700/6500K	130	White

Specification



Suspension Cables
DP-PKT-12-S



Connecting Kit
STR-SPM-CA




Microwave Motion Sensor
STR-MS



Sensor Remote
STR-RC




8W EM Battery Backup
STR-EM



Wire Guards
STR2-WG
STR4-WG

Dimensions

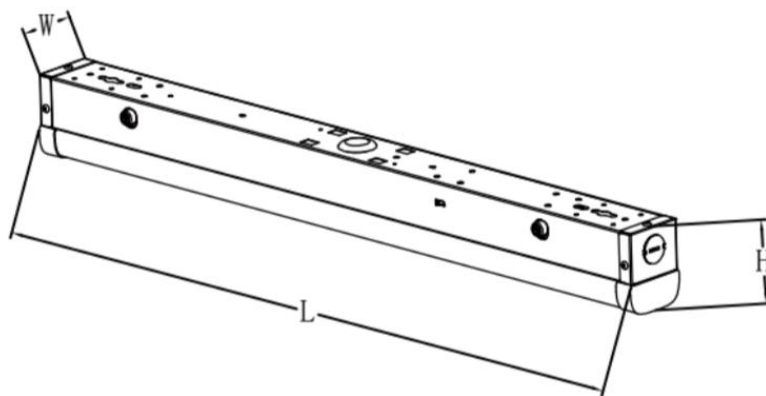

Model Number

STR2-15T25W-5CCT-DV2
STR4-20T40W-5CCT-DV2
STR8-50T80W-5CCT-DV2

Dimensions

23.98 x 2.09 x 2.59 in
48.03 x 2.09 x 2.59 in
95.98 x 2.09 x 2.59 in

Packaging Dimensions

SKU#	Inner Box	Qty	Master Box	Qty
STR2-15T25W-5CCT-DV2	24.40 x 2.60 x 2.95 in	1	25.00 x 11.34 x 9.84 in	12
STR4-20T40W-5CCT-DV2	48.40 x 2.60 x 2.95 in	1	49.00 x 11.34 x 9.84 in	12
STR8-50T80W-5CCT-DV2	96.40 x 2.60 x 2.95 in	1	97.00 x 8.58 x 6.77 in	6

Photometry

STR2-15T25W-5CCT-DV2

