





## LED Traditional Wall Pack

3 CCT and 3 Wattage Selectable

Project: \_\_\_\_\_ Location: \_\_\_\_\_

Date: \_\_\_\_\_ Part #: \_\_\_\_\_

Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- Lumileds SMD2835 LEDs with 3-CCT White Color Selectable (3000K/4000K/5000K)
- CRI >80
- L70 lifespan of 100,000 hours
- 0-10V dimmable driver
- 120-277V input
- Built-in 6kV surge protection
- Flicker-free performance

#### Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finishes available
- Wet Location Rated
- H95° beam angle
- B2-U4-G3/B2-U4-G4/B3-U5-G5 Rating for Optical Distribution
- Prismatic lens
- Operates efficiently in temperatures from -40°F to 122°F

#### Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- FCC compliant
- Backed by a 5-year limited warranty

### SKU Guide

Example: WPLL-40T80W-3CCT-DV2-PC-CL-BZ


Family	Wattage	CCT	Driver & Voltage	Controls	Lens Type	Finish
WPLL	40T80W 80T120W	3CCT = 3000K 4000K 5000K	D = 0-10V Dimming V2 = 120-277V	PC = Photocell	CL = Clear	BZ = Bronze WH = White

## Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
<b>40W-60W-80W - Selectable</b> WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	40W/60W/80W	6,000 9,000 12,000	3CCT 3000K/4000K/5000K	150	Bronze or White
<b>80W-100W-120W - Selectable</b> WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	80W/100W/120W	12,000 15,000 18,000	3CCT 3000K/4000K/5000K	150	Bronze or White

Contact for custom configuration & specifications

## Dimensions


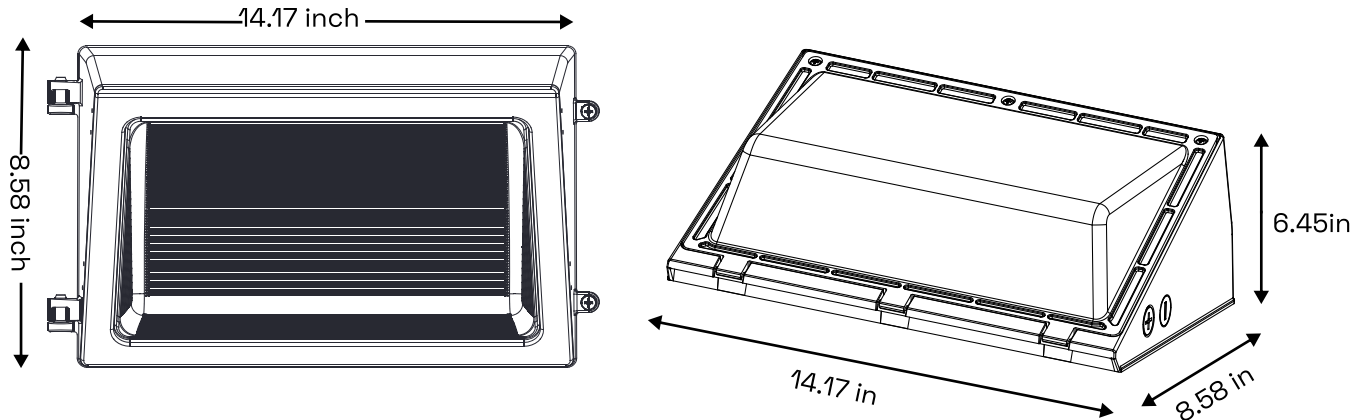


## Packaging Dimensions

SKU#	Master Carton	Qty
WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1
WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1

## Photometry

WPLL-40T80W-3CCT-DV2-PC-CL-BZ  
WPLL-40T80W-3CCT-DV2-PC-CL-WH

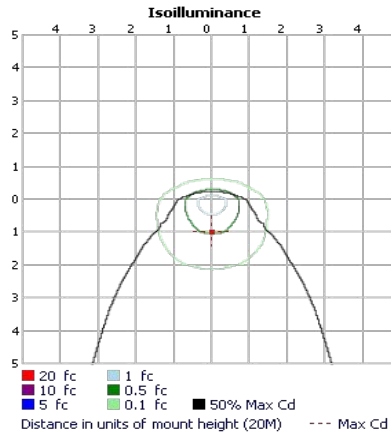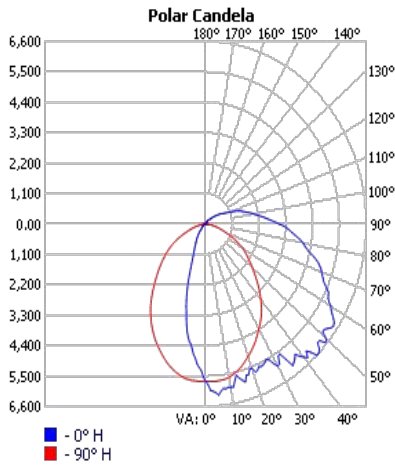

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	3,697.3	21.9%	21.9%
0-40	5,774.9	34.3%	34.3%
0-60	10,203.6	60.5%	60.5%
60-90	4,745.2	28.1%	28.1%
70-100	3,560.8	21.1%	21.1%
90-120	1,620.8	9.6%	9.6%
0-90	14,948.8	88.7%	88.7%
90-180	1,909.8	11.3%	11.3%
0-180	16,858.6	100%	100%

### BUG Rating

### B3 - U5 - G5

Forward Light	Lumens	Lumens %
Low(0-30):	2,331.5	13.8%
Medium(30-60):	5,401.9	32%
High(60-80):	3,349.9	19.9%
Very High(80-90):	1,144.9	6.8%
Back Light		
Low(0-30):	1,366.2	8.1%
Medium(30-60):	1,105.7	6.6%
High(60-80):	219.8	1.3%
Very High(80-90):	29.9	0.2%
Uplight		
Low(90-100):	792.7	4.7%
High(100-180):	1,116.8	6.6%
Trapped Light:	0.0	0%

**Note:** Additional Photometry available on request