


Industrial Interchange Brass Couplers

Female Coupler



Part No.	Size	A (In)	B (In)	C (In)	Hex (In)	Carton Qty	Wt. (lbs.)
SU2-2SF-J	1/4" FPT	1.81	0.87	0.53	0.75	250	0.17

Industrial Interchange (Type IM) Couplers

Sleeve Pullback Connection Design Provides Strongest Holding Force

Integral Sleeve Guard to Prevent Accidental Disconnection

Brass Construction

300 psi Maximum Working Pressure

1/4" NPT Threads

Stainless Steel Spring and Locking Balls


35 SCFM at 100 psi w/ 10 psi Pressure Drop

Temperature Range: -40 F to 225 F

Meets MIL Spec C-4109F

Accepts 1/4" Industrial Interchange Plugs

Male Coupler

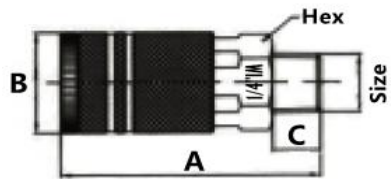

Part No.	Size	A (In)	B (In)	C (In)	Hex (In)	Carton Qty	Wt. (lbs.)
SU2-2SM-J	1/4" MPT	2.17	0.87	0.47	0.75	250	0.17