

Thickness Gages

SERIES 547, 7

Universal Type (interchangeable anvils)



547-528

SPECIFICATIONS

Inch/Metric Digital Type

| Range | Order No. | Resolution | Accuracy | Measuring force | Indicator |
|---------------------|----------------|---------------|----------|-----------------|---------------|
| 0 - .47" / 0 - 12mm | 547-528 | .0005"/0.01mm | ±.001" | 1.5N or less | Digimatic IDS |

Inch Dial Type


| Range | Order No. | Graduation | Accuracy | Measuring force | Remarks |
|---------|--------------|------------|----------|-----------------|------------------------|
| 0 - .4" | 73285 | .001" | ±.001" | 1.5N or less | Interchangeable anvils |

Optional Accessories

- 905338:** SPC cable (40" / 1m) for digital type
- 905409:** SPC cable (80" / 2m) for digital type
- 902011:** Spindle lifting lever for metric dial type (stroke 10mm)
- 902794:** Spindle lifting lever for digital and inch dial type (stroke .4" / 10mm)

Standard Accessories

Recommended Combinations

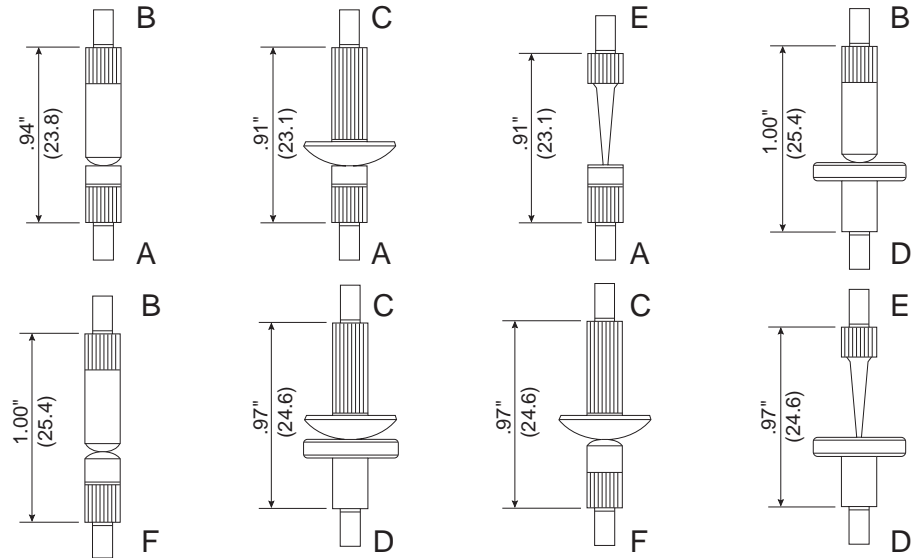

- | | | |
|--------------------|-----------------|--------------|
| A. 133017 | Flat Point | ø.20 |
| B. 21AAA033 | Shell Point | .16" Radius |
| C. 21BZA767 | Spherical Point | .36" Radius |
| D. 101188 | Flat Point | ø.50 |
| E. 21AAA030 | Needle Point | .016" Radius |
| F. 21AAA032 | Shell Point | .16" Radius |