


Lever-head mounting brackets (optional)

Optional accessories for Mitutoyo test indicators can be used.



Stems



Clamp



Holder




SPECIFICATIONS

Cartridge heads (special order only)

Order No.	519-331	519-332	519-346	519-347	519-385	519-341	519-348
Model	MCH-331	MCH-332	MCHS-346	MCHS-347	MCH-385	MCHP-341	MCHS-348
Measuring range (mm)	±0.5	±0.5	±0.25	±0.5	±1.5	±2.5	±1.0
Stroke (mm)	±0.65	±0.65	+0.34 -0.26	+0.85 -0.65	+2.35 -1.65	+3.2 -2.8	+1.35 -1.15
Measuring force (N)	Approx. 0.25	Approx. 0.25	Approx. 0.7	Approx. 0.7	Approx. 0.7	Approx. 0.9	Approx. 0.7
Stem Dia. (mm)	ø8	ø3/8 in	ø8	ø8	ø8	ø8	ø8
Linearity (%)	±0.5	±0.5	±0.3	±0.3	±0.3	±0.5	±0.3
Plunger support	Plain bearing		Linear ball-bearing				


519-331/(519-332) MCH-331/(MCH-332)

- M2.5x5 (4-48 UNF) interchangeable contact points for dial indicators can be used.

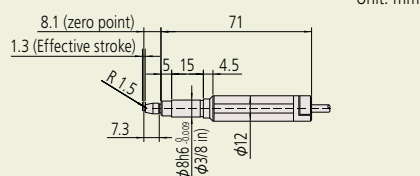


519-346 MCHS-346

- Dedicated contact point only that cannot be replaced.




519-347 MCHS-347

- Dedicated contact point only that cannot be replaced.

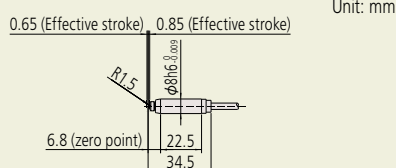


519-385 MCH-385

- M2.5x5 interchangeable contact points for dial indicators can be used.

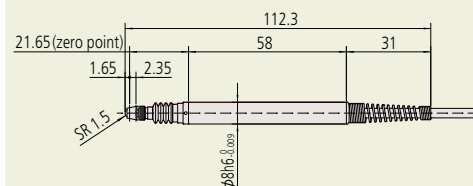

519-341 MCHP-341

- M2.5x5 interchangeable contact points for dial indicators can be used.
- Recommended air pressure 0.05 MPa

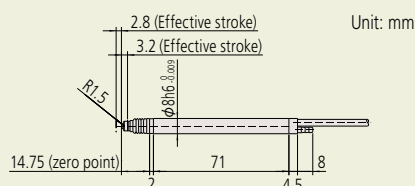

519-348 MCHS-348

- M2.5x5 interchangeable contact points for dial indicators can be used.

