


ABSOLUTE™

IP67



www.mit.com  
ID 0000045042



Radiused jaws for accurate ID measurement

### Technical Data

- Accuracy: Refer to the list of specifications. (excluding quantizing error for Digimatic models)
- Resolution: 0.01 mm or 0.0005 in/0.01 mm
- Display: LCD
- Scale type: ABSOLUTE electromagnetic induction linear encoder
- Max. response speed: Unlimited
- Battery: SR44 (1 pc), **938882**, for initial operational checks (standard accessory)

### Optional Accessories

For details, refer to page A-27.

- **959143**: Data hold unit
- Connecting cables for **IT/DP/MUX**
  - **05CZA624**: SPC cable with data button (1 m)\*
  - **05CZA625**: SPC cable with data button (2 m)\*
  - **959149**: SPC cable with data button (1 m)
  - **959150**: SPC cable with data button (2 m)
- USB Input Tool Direct
  - **06AFM380A**: SPC cable for **USB-ITN-A** (2 m)\*
  - **06AFM380C**: SPC cable for **USB-ITN-C** (2 m)
- Connecting cables for **U-WAVE-T**
  - **02AZD790A**: SPC cable with data button (160 mm)
  - **02AZE140A**: SPC cable for foot switch


### Wireless Data Output U-WAVE™

- **U-WAVE-TC**: **264-620** (IP67 type)  
**264-621** (Buzzer type)
- **U-WAVE-TCB Transmitter (Mitutoyo Bluetooth® U-WAVE)**  
**264-624** (IP type)  
**264-625** (Buzzer type)  
Refer to page A-15 for details.
- Connecting unit for **U-WAVE-TC/TCB**  
**02AZF310** (IP67 type)  
Note: IP67 model is water/dust-proofed suitable for the factory floor.  
Buzzer type is not water/dust-proofed.  
Refer to pages A-16 and A-18 for details.  
\* For IP67 models (up to 300 mm)

## ABSOLUTE Digimatic Caliper SERIES 550 — with Nib Style Jaws

MeasurLink<sup>®</sup> ENABLED  
Data Management Software by Mitutoyo

- Offers a resolution of 0.01 mm with corresponding accuracy.
- Incorporates an Absolute measurement system. No need to reset the origin after switching on. (Refer to page D-4 and D-6 for details on the Absolute function.)
- **Order No. 550-301-20, 550-331-20, 550-311-20 and 550-341-20**: IP67 (Rustproofing shall be applied after use if caliper was in contact with coolant.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. (Refer to page A-3.)
- ID measurement value: displayed value + (a compensation value displayed on the main unit). OFFSET switch allows to input a compensation value so that the measurement value can be read directly (**Order No. 550-301-20, 550-331-20, 550-311-20 and 550-341-20**). Preset function allows to set a desired starting point (**550-331-20 and 550-341-20**).

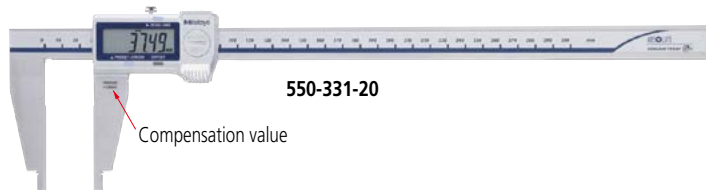

### SPECIFICATIONS

Metric			
Order No.	Range (mm)*	Accuracy (mm)	Remarks
<b>550-301-20</b>	0 - 200 (10.1 - 210)	±0.03	IP67, with offset
<b>550-331-20</b>	0 - 300 (10.1 - 310)	±0.04	IP67, with offset/preset function for easy inside measurement
<b>550-203-10</b>	0 - 450 (20.1 - 470)	±0.05	—
<b>550-205-10</b>	0 - 600 (20.1 - 620)	±0.05	—
<b>550-207-10</b>	0 - 1000 (20.1 - 1020)	±0.07	—

\* ( ) : Inside measurement  
Note: Series 550 is not equipped with a depth bar.

Inch / Metric			
Order No.	Range (in)*	Accuracy (in)	Remarks
<b>550-311-20</b>	0 - 8 (0.404 - 8.4)	±0.0015	IP67, with offset
<b>550-341-20</b>	0 - 12 (0.404 - 12.4)	±0.002	IP67, with offset/preset function for easy inside measurement
<b>550-223-10</b>	0 - 18 (0.504 - 18.5)		—
<b>550-225-10</b>	0 - 24 (0.504 - 24.5)		—
<b>550-227-10</b>	0 - 40 (1.004 - 41)	±0.003	—

\* ( ) : Inside measurement  
Note: Series 550 is not equipped with a depth bar.

### DIMENSIONS

Range (mm)	D	G	S	W	H	t	R
0 - 200 (0 - 8 in)*	60	5 (5.08)*	8	76	16	3	5 (5.08)*
0 - 300 (0 - 12 in)*	75		12	95	20	3.8	
0 - 450 (0 - 18 in)*	100	10 (6.35)*	18	125	25	6	10 (6.35)*
0 - 600 (0 - 24 in)*			24	172	32	8	10 (12.7)*
0 - 1000 (0 - 40 in)*	140	10 (12.7)*	24	172	32	8	10 (12.7)*

\* Inch model