


CONDUCTIVITY SENSORS: CS951 & CS951LS

Conductivity Sensors for 900 Series Multi-Parameter Monitor / Controllers

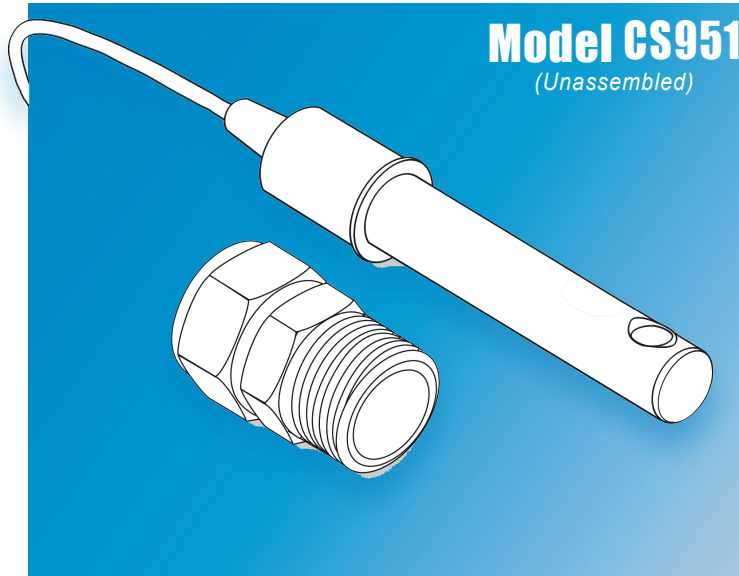

Model CS951
(Unassembled)

- *Measurement range from 0 to 20,000 μ S.*
- *Can be installed in-line, in a tank or as a submersion sensor¹.*
- *Dual O-ring seals for long term, in stream reliability.*
- *Customized cell constant is verified on each sensor for best accuracy.*

BENEFITS

- *Low Cost / High Performance.*
- *Temperature and Chemically Resistant Construction.*
- *Easy to Install.*
- *Cable Lengths Up to 100ft Available.*
- *Built in Temperature Sensor Measures Solution Temperature Directly.*

DESCRIPTION

The Myron L[®] Company CS951 and CS951LS Conductivity sensors are designed to operate in demanding environments. They are an excellent sensor for a wide variety of water quality applications.

Process connections are made via a 3/4" NPT fitting. This fitting

may be installed into a line or tank, or may be reversed so that the sensor can be inserted into a standpipe for use in submersion applications¹. The standard versions have a 316 stainless steel body and fittings made from temperature resistant and chemically non-reactive polypropylene. Optional fittings of stainless steel or PVDF (polyvinylidene difluoride) are available for even better chemical and temperature resistance.

All CS951 and CS951LS sensors are completely encapsulated and feature a dual O-ring seal design that ensures long life under demanding conditions. The outer O-ring bears the brunt of environmental attacks allowing the inner O-ring to maintain a reliable seal.


The built-in PT1000 RTD makes accurate and quick temperature measurements for superior temperature compensation².



Assembled CS951 Sensor

Standard cable length is 10ft. (3.05m) terminated with 5, tinned leads (4 signal; 1 shield; separate 5-pin terminal block included). They are also available with optional 25ft (7.6m) or 100ft (30.48m) cables.

For more information please visit our website at www.myronl.com



¹ Sensor back seal at cable exit is not water tight. ALWAYS mount the sensor in a standpipe for submersion applications.

² Temperature compensation can be deactivated to meet USP (United States Pharmacopoeia) requirements.

SPECIFICATIONS: CS951 & CS951LS

Measurement Range:	0 μ S to 20,000 μ S
Nominal Cell Constant:	0.85 ¹
Sensor Body:	316 Stainless Steel
Insulator:	Teflon
Process Fitting and Fastener:	Polypropylene (Standard); Also available in PVDF and Stainless Steel.
Dual O-rings:	EPR
Temperature Sensor:	PT1000 RTD
Temperature - Pressure: (By Fitting Material)	PP: 0 - 100 °C (32 - 212 °F) @ 0 - 100 PSIG (6.9 bar) PVDF: 0 - 100 °C (32 - 212 °F) @ 0 - 100 PSIG (6.9 bar) S/S: 0 - 120 °C (32 - 248 °F) @ 0 - 200 PSIG (13.8 bar)
Physical Connection & Mounting:	3/4" NPT: In-line: May be installed in any orientation. Immersion: Requires a standpipe and coupler.
Electrical Connection (Standard):	10 ft. (3.05 m) long Shielded Cable: 22 AWG, 4 leads + Shield Drain Wire 5-pin Terminal Block Included.

¹Actual Cell Constant for each sensor is verified and recorded on the P/N label attached to the sensor cable.

Drawing not to scale

CS951 - Exploded Diagram

3/4" NPT Thread
Polypropylene (Standard)
1.00 in Wrench Flat (26 mm)
EPR O-Ring
Polypropylene Washer
316 S/S Sensor Body
PT1000 RTD
Fastener (Material Matches Process Fitting)
S/S Washer
DIM "B"

CS951 - Assembled

DIM "C"
DIM "A"
 \varnothing 0.50" in (13 mm)
Conductor Count: 4 +Shield Drain
Conductor Size: 22 AWG
NEUTRAL - Shield Drain
GREEN - TC Element
RED - TC Element
WHITE - Outer Electrode
BLACK - Inner Electrode
Foil shield over red / black conductors

Sensor:
Conductivity, Resistivity, TDS, or Salinity
TB: COND / RES 1, COND / RES 2

Neutral
Green
Red
White
Black

P/N Label

Model Number
K = X.XXXX
PT1000
S/N XXXXXX-XX

Recorded Cell Constant

Custom and OEM models available.

Key Dimensions (in / mm)			
MODEL No.	"A"	"B"	"C"
CS951	0.30 / 8.6	2.75 / 69.9	1.25 / 37.8
CS951LS	0.30 / 8.6	6.00 / 152.4	4.25 / 108

LIMITED WARRANTY

All Myron L[®] Company Conductivity Sensors have a Two (2) Year Limited Warranty. If sensor fails to function normally, return the unit to the factory prepaid. If, in the opinion of the factory, failure was due to materials or workmanship, repair or replacement will be made without charge. A reasonable service charge will be made for diagnosis or repairs due to normal wear, abuse or tampering. Warranty is limited to the repair or replacement of the sensor only. The Myron L[®] Company assumes no other responsibility or liability.

2450 Impala Drive
Carlsbad, CA 92010-7226 USA
Tel: +1-760-438-2021
Fax: +1-800-869-7668 / +1-760-931-9189
www.myronl.com

Built On Trust.

Founded in 1957, the Myron L[®] Company is one of the world's leading manufacturers of water quality instruments. Because of our commitment to product improvement, changes in design and specifications are possible. You have our assurance any changes will be guided by our product philosophy: accuracy, reliability, and simplicity.

